
Jupyter Documentation

Release 4.1.1 alpha

<https://jupyter.org>

May 17, 2023

CONTENTS

1 Start Here	3
2 Sub-project documentation	5
3 Table of Contents	7
3.1 Try Jupyter	7
3.2 Usage	16
3.3 Projects	29
3.4 Community	43
3.5 Contributing	101
3.6 Reference	170
4 Resources	175
5 Indices and tables	177
Index	179

Welcome to the Jupyter Project documentation. This website acts as “meta” documentation for the Jupyter ecosystem. It has a collection of resources to navigate the tools and communities in this ecosystem, and to help you get started.

START HERE

These are a few high-level topics to help you learn more about the Jupyter community and ecosystem.

<i>Get started with Jupyter Notebook</i> Try the notebook	<i>Community</i> Sustainability and growth
<i>Architecture</i> What is Jupyter?	<i>Contributor Guides</i> How to contribute to the projects
<i>Narratives and Use Cases</i> Narratives of common deployment scenarios	<i>Release Notes</i> New features, upgrades, deprecation notes, and bug fixes
<i>IPython</i> An interactive Python kernel and REPL	<i>Reference</i> APIs
<i>Installation, Configuration, and Usage</i> Documentation for users	<i>Advanced</i> Documentation for advanced use-cases

SUB-PROJECT DOCUMENTATION

Sub-projects are major technical and community efforts, and generally have their own documentation for their communities. Below is a list of documentation for major parts of the Jupyter ecosystem.

User Interfaces

- [JupyterLab](#)
- [Jupyter Notebook](#)
- [nbclassic](#)
- [Jupyter Console](#)
- [Qt console](#)
- [Voilà](#)

JupyterHub

- [JupyterHub](#)
- [Configurable HTTP proxy](#)
- [Authenticators: LDAP, OAuth, Native, LTI](#)
- [Spawners: sudo, Docker, Kubernetes](#)
- [Zero to JupyterHub](#)
- [All JupyterHub Projects...](#)

Working with Notebooks

- [nbclient - execution](#)
- [nbconvert - conversion](#)
- [nbviewer - viewing](#)
- [nbdime - comparing and merging](#)
- [nbgrader - grading](#)
- [nbformat - modification and validation](#)

Kernels

- [IPython](#)
- [IRkernel](#)
- [IJulia](#)
- [Xeus kernels](#)

- [Community maintained kernels](#)

IPython

- [IPython](#)
- [ipykernel](#)
- [ipyparallel](#)
- [traitlets](#)

Architecture and Specification

- [nbformat - Jupyter Notebook Format](#)
- [jupyter-client - Jupyter Messaging Protocol](#)
- [jupyter-core](#)
- [jupyter-server](#)
- [jupyterlab-server](#)

Deployment

- [Docker Stacks](#)
- [Kernel Gateway](#)
- [Enterprise Gateway](#)

Widgets

- [ipywidgets](#)
- [widget-cookiecutter](#)
- [All Widget Projects...](#)

TABLE OF CONTENTS

The rest of the documentation on this site covers major use-cases of the Jupyter ecosystem, as well as topics that will help you navigate the various parts of the Jupyter community. For more in-depth documentation about a specific tool, we recommend checking out that tool's documentation (see the list above).

3.1 Try Jupyter

Contents

- *Try in Your Browser. No Installation Needed.*
 - *Try the Classic Notebook interface*
 - *Try the JupyterLab interface*
- *Next step: install Jupyter locally*

These sections describe a few ways to get started with some of the most-commonly used tools in the Jupyter ecosystem.

3.1.1 Try in Your Browser. No Installation Needed.

Try Jupyter (<https://try.jupyter.org>) is a site for trying out the Jupyter Notebook, equipped with kernels for several different languages (Julia, R, C++, Scheme, Ruby) without installing anything. Click the link below to go to the page.

[Click to Try Jupyter](#)

When running the examples on the Try Jupyter site, you will get a temporary Jupyter server running on mybinder.org which you can use to play around until you close your browser session.


You can use this site to try a few of the major interactive computing interfaces created by the Jupyter community. A description of each is below.

Try the Classic Notebook interface


The *Classic Notebook* interface is a document-oriented interface that allows you to create, view, and execute code in a Jupyter Notebook.

The example should look like this:

Notebook Dashboard

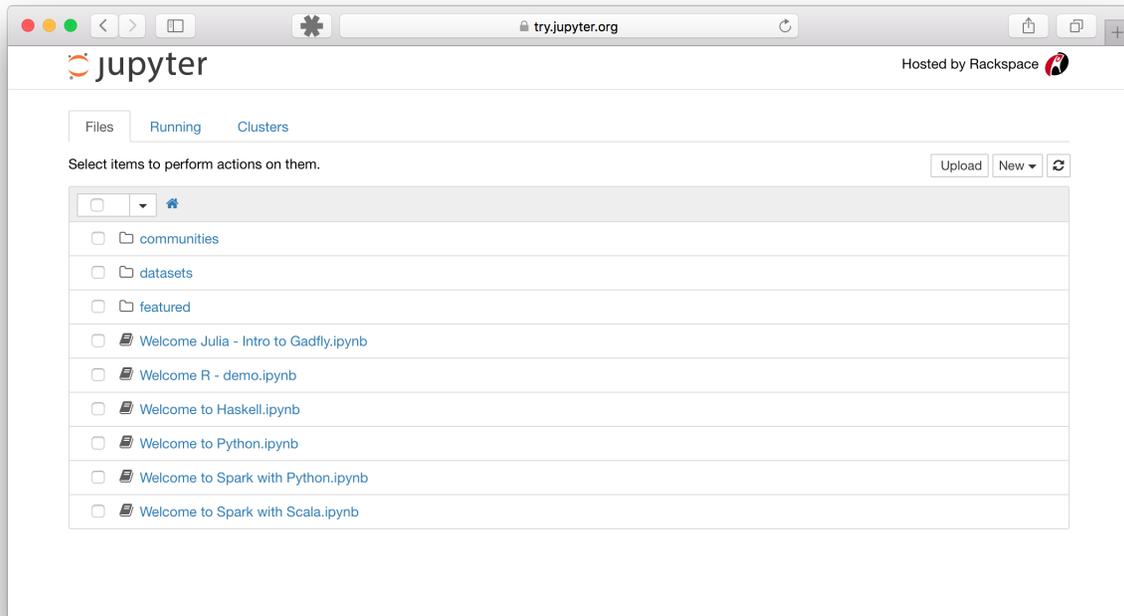

Notebook Editor

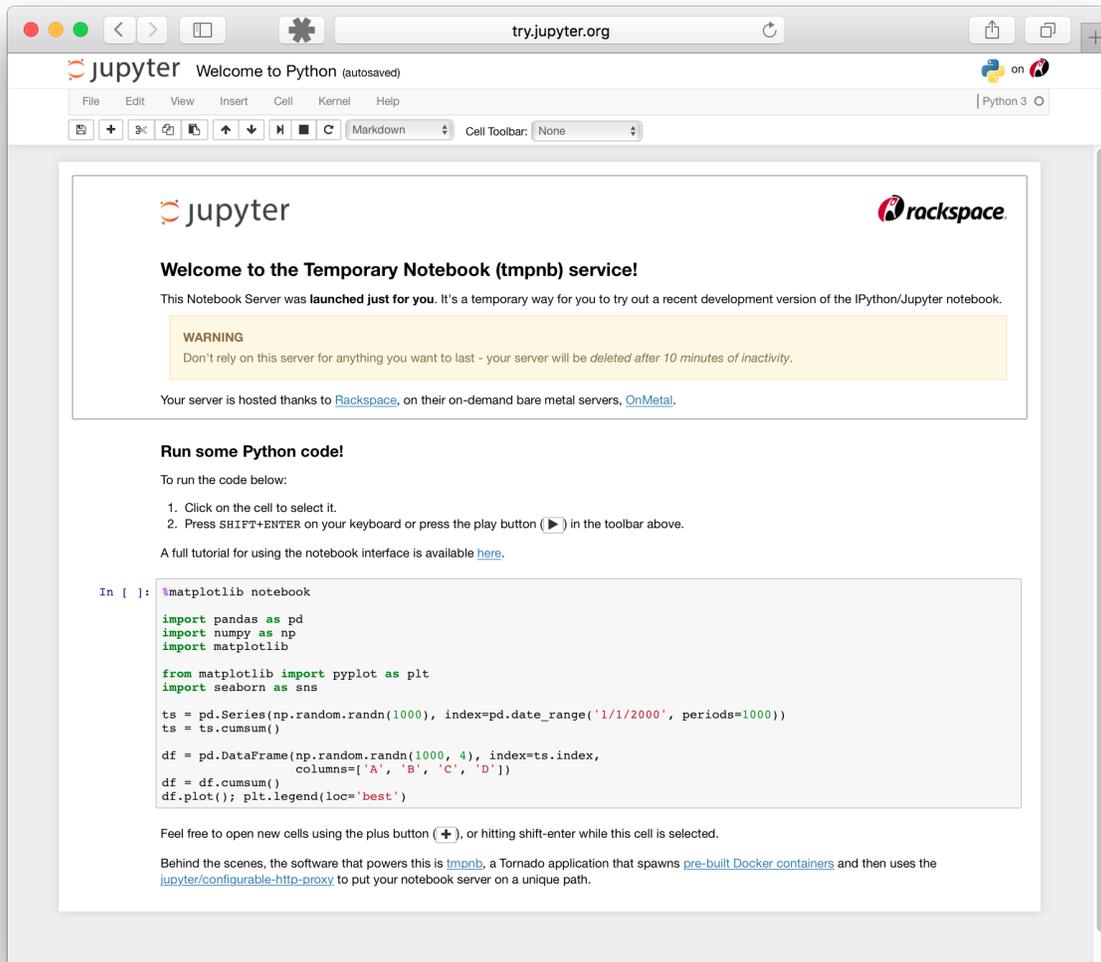

Try the JupyterLab interface

The Jupyter Lab interface is a more extensible and composable interactive computing interface for more complex workflows.

Here's an example of what the JupyterLab interface looks like:

3.1.2 Next step: install Jupyter locally

If you have tried Jupyter and like it, please use our *Installation Guide* to install Jupyter on your computer.

Install and Use

This page contains information and links about installing and using tools across the Jupyter ecosystem. Generally speaking, the documentation of each tool is the place to learn about the best-practices for how to install and use the tool.

Jupyter Notebook Interface

The **Jupyter Notebook interface** is a Web-based application for authoring documents that combine live-code with narrative text, equations and visualizations.

- [GitHub Repo](#)
- [Docs](#)

Installing the classic Jupyter Notebook interface

This section includes instructions on how to get started with **Jupyter Notebook**. But there are multiple Jupyter user interfaces one can use, based on their needs. Please checkout the list and links below for additional information and instructions about how to get started with each of them.

This information explains how to install the Jupyter Notebook and the IPython kernel.

Prerequisite: Python

While Jupyter runs code in many programming languages, **Python** is a requirement for installing the Jupyter Notebook. The Python version required differs between Jupyter Notebook releases (e.g. Python 3.6+ for Notebook v6.3, and Python 3.7+ for Notebook v7).

We recommend using the [Anaconda](#) distribution to install Python and Jupyter. We'll go through its installation in the next section.

Installing Jupyter using Anaconda and conda

For new users, we **highly recommend** installing [Anaconda](#). Anaconda conveniently installs Python, the Jupyter Notebook, and other commonly used packages for scientific computing and data science.

Use the following installation steps:

1. Download [Anaconda](#). We recommend downloading Anaconda's latest Python 3 version (currently Python 3.9).
2. Install the version of Anaconda which you downloaded, following the instructions on the download page.
3. Congratulations, you have installed Jupyter Notebook. To run the notebook:

```
jupyter notebook
```

See *Running the Notebook* for more details.

Alternative for experienced Python users: Installing Jupyter with pip

Important: Jupyter installation requires Python 3.3 or greater, or Python 2.7. IPython 1.x, which included the parts that later became Jupyter, was the last version to support Python 3.2 and 2.6.

As an existing Python user, you may wish to install Jupyter using Python's package manager, *pip*, instead of Anaconda. First, ensure that you have the latest pip; older versions may have trouble with some dependencies:

```
pip3 install --upgrade pip
```

Then install the Jupyter Notebook using:

```
pip3 install jupyter
```

(Use `pip` if using legacy Python 2.)

Congratulations. You have installed Jupyter Notebook. See *Running the Notebook* for more details.

Upgrading Jupyter Notebook

Contents

- *Upgrading Jupyter Notebook using Anaconda*
- *Upgrading IPython Notebook to Jupyter Notebook*

Upgrading Jupyter Notebook using Anaconda

If using **Anaconda**, update Jupyter using conda:

```
conda update jupyter
```

See *Run the Notebook* for running the Jupyter Notebook.

Upgrading IPython Notebook to Jupyter Notebook

The Jupyter Notebook used to be called the IPython Notebook. If you are running an older version of the IPython Notebook (version 3 or earlier) you can use the following to upgrade to the latest version of the Jupyter Notebook.

If using **Anaconda**, update Jupyter using conda:

```
conda update jupyter
```

or

If using *pip*:

```
pip install -U jupyter
```

See *Run the Notebook* for running the Jupyter Notebook.

See also:

The *migrating document* has additional information about migrating from IPython 3 to Jupyter.

JupyterLab

JupyterLab is a next-generation web-based user interface for Project Jupyter.

- [GitHub Repo](#)
- [Docs](#)
- [Install instructions](#)

JupyterHub

JupyterHub is a multi-user hub for interactive computing sessions, made for teams and organizations, and with pluggable authentication and scalability.

- [GitHub Repo](#)
- [Docs](#)
- [Install instructions](#)

Jupyter Console

The **Jupyter Console** is a terminal-based console for interactive computing.

- [GitHub Repo](#)
- [Docs and Install instructions](#)

Jupyter QtConsole

The **Jupyter QtConsole** is a Qt application for interactive computing with rich output.

- [GitHub Repo](#)
- [Docs](#)
- [Install instructions](#)

Jupyter Kernels

You can install **Jupyter Kernels** to add support for new languages and code behavior.

Installing Kernels

This information gives a high-level view of using Jupyter Notebook with different programming languages (kernels).

Are any languages pre-installed?

Yes, installing the Jupyter Notebook will also install the `IPython kernel`. This allows working on notebooks using the Python programming language.

How do I install Python 2 and Python 3?

To install an additional version of Python, i.e. to have both Python 2 and 3 available, see the IPython docs on [installing kernels](#).

How do I install other languages like R or Julia?

To run notebooks in languages other than Python, such as R or Julia, you will need to install additional kernels. For more information, see the full [list of available kernels](#).

See also:

Jupyter Projects

Detailed installation instructions for individual Jupyter or IPython projects.

Kernels

Information about additional programming language kernels.

Kernels documentation for Jupyter client

Technical information about kernels.

Running the Notebook

Contents

- *Basic Steps*
- *Starting the Notebook Server*
- *Introducing the Notebook Server's Command Line Options*
 - *How do I open a specific Notebook?*
 - *How do I start the Notebook using a custom IP or port?*
 - *How do I start the Notebook server without opening a browser?*
 - *How do I get help about Notebook server options?*
- *Using a command-line interface*

Basic Steps

1. Start the notebook server from the *command line*:

```
jupyter notebook
```

2. You should see the notebook open in your browser.

Starting the Notebook Server

After you have installed the Jupyter Notebook on your computer, you are ready to run the notebook server. You can start the notebook server from the *command line* (using *Terminal* on Mac/Linux, *Command Prompt* on Windows) by running:

```
jupyter notebook
```


This will print some information about the notebook server in your terminal, including the URL of the web application (by default, `http://localhost:8888`):

```
$ jupyter notebook
[I 08:58:24.417 NotebookApp] Serving notebooks from local directory: /Users/catherine
[I 08:58:24.417 NotebookApp] 0 active kernels
[I 08:58:24.417 NotebookApp] The Jupyter Notebook is running at: http://localhost:8888/
[I 08:58:24.417 NotebookApp] Use Control-C to stop this server and shut down all kernels.
↵(twice to skip confirmation).
```

It will then open your default web browser to this URL.

When the notebook opens in your browser, you will see the *Notebook Dashboard*, which will show a list of the notebooks, files, and subdirectories in the directory where the notebook server was started. Most of the time, you will wish to start a notebook server in the highest level directory containing notebooks. Often this will be your home directory.

Notebook Dashboard

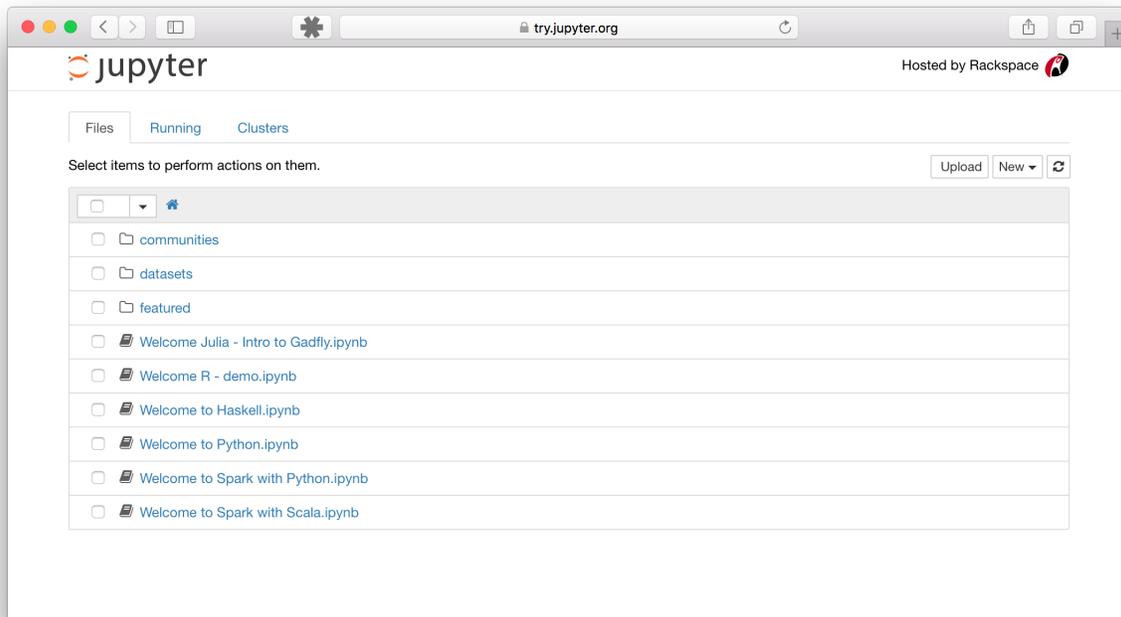

Introducing the Notebook Server's Command Line Options

How do I open a specific Notebook?

The following code should open the given notebook in the currently running notebook server, starting one if necessary.

```
jupyter notebook notebook.ipynb
```

How do I start the Notebook using a custom IP or port?

By default, the notebook server starts on port 8888. If port 8888 is unavailable or in use, the notebook server searches the next available port. You may also specify a port manually. In this example, we set the server's port to 9999:

```
jupyter notebook --port 9999
```

How do I start the Notebook server without opening a browser?

Start notebook server without opening a web browser:

```
jupyter notebook --no-browser
```

How do I get help about Notebook server options?

The notebook server provides help messages for other command line arguments using the `--help` flag:

```
jupyter notebook --help
```

See also:

Jupyter Installation, Configuration, and Usage

Detailed information about command line arguments, configuration, and usage.

Using a command-line interface

Notebooks can be executed from your terminal using the `run` subcommand. It expects notebook paths as input arguments and accepts optional flags to modify the default behavior.

Running a notebook is this easy.

```
jupyter run notebook.ipynb
```

You can pass more than one notebook as well.

```
jupyter run notebook.ipynb notebook2.ipynb
```

By default, notebook errors will be raised and printed into the terminal. You can suppress them by passing the `--allow-errors` flag.

```
jupyter run notebook.ipynb --allow-errors
```

For more sophisticated execution options, consider the [papermill](#) library.

3.2 Usage

Information relevant to using the various tools in the Jupyter ecosystem.

3.2.1 Use and Configure

The `jupyter` Command

Synopsis

```
jupyter <subcommand> [options]
```

Description

Commands like `jupyter notebook` start Jupyter applications. The `jupyter` command is primarily a namespace for subcommands. A command like `jupyter-foo` found on your `PATH` will be available as a subcommand `jupyter foo`.

The **jupyter** command can also be used to do actions other than starting a Jupyter application.

Command options

-h, --help

Show help information, including available subcommands.

--config-dir

Show the location of the config directory.

--data-dir

Show the location of the data directory.

--runtime-dir

Show the location of the runtime directory.

--paths

Show all Jupyter directories and search paths.

--json

Print directories and search paths in machine-readable JSON format.

Common Directories and File Locations

Contents

- *Configuration files*
- *Data files*
- *Runtime files*
- *Summary*

Jupyter stores different files (i.e. configuration, data, runtime) in a number of different locations. Environment variables may be set to customize for the location of each file type.

Jupyter separates **data files** (nbextensions, kernelspecs) from **runtime files** (logs, pid files, connection files) from **configuration** (config files, custom.js).

Configuration files

Config files are stored by default in the `~/ .jupyter` directory.

JUPYTER_CONFIG_DIR

Set this environment variable to use a particular directory, other than the default, for Jupyter config files.

Besides the `JUPYTER_CONFIG_DIR`, additional directories to search can be specified through `JUPYTER_CONFIG_PATH`.

JUPYTER_CONFIG_PATH

Set this environment variable to provide extra directories for the config search path. `JUPYTER_CONFIG_PATH` should contain a series of directories, separated by `os.pathsep` (; on Windows, : on Unix).

An example of where the `JUPYTER_CONFIG_PATH` can be set is if notebook or server extensions are installed in a custom prefix. Since notebook and server extensions are automatically enabled through configuration files, automatic enabling will only work if the custom prefix's `etc/jupyter` directory is added to the Jupyter config search path.

Besides the user config directory mentioned above, Jupyter has a search path of additional locations from which a config file will be loaded. Here's a table of the locations to be searched, in order of preference:

Unix	Windows
<code>JUPYTER_CONFIG_DIR</code>	
<code>JUPYTER_CONFIG_PATH</code>	
<code>{sys.prefix}/etc/jupyter/</code>	
<code>/usr/local/etc/jupyter/</code>	<code>/etc/jupyter/</code>
	<code>%PROGRAMDATA%\jupyter\</code>

To list the config directories currently being used you can run the below command from the *command line*:

```
jupyter --paths
```

The following command shows the config directory specifically:

```
jupyter --config-dir
```

Data files

Jupyter uses a search path to find installable data files, such as `kernel specs` and notebook extensions. When searching for a resource, the code will search the search path starting at the first directory until it finds where the resource is contained.

Each category of file is in a subdirectory of each directory of the search path. For example, kernel specs are in `kernel s` subdirectories.

JUPYTER_PATH

Set this environment variable to provide extra directories for the data search path. `JUPYTER_PATH` should contain a series of directories, separated by `os.pathsep` (; on Windows, : on Unix). Directories given in `JUPYTER_PATH` are searched before other locations. This is used in addition to other entries, rather than replacing any.

Linux (& other free desktops)	Mac	Windows
<i>JUPYTER_PATH</i>		
<i>JUPYTER_DATA_DIR</i> or (if not set) ~/.local/share/jupyter/ (respects \$XDG_DATA_HOME)	<i>JUPYTER_DATA_DIR</i> or (if not set) ~/Library/Jupyter	<i>JUPYTER_DATA_DIR</i> or (if not set) %APPDATA%\jupyter
{sys.prefix}/share/jupyter/		
/usr/local/share/jupyter /usr/share/jupyter		%PROGRAMDATA\jupyter

The config directory for Jupyter data files, which contain non-transient, non-configuration files. Examples include kernelspecs, nbextensions, or voila templates.

JUPYTER_DATA_DIR

Set this environment variable to use a particular directory, other than the default, as the user data directory.

As mentioned above, to list the config directories currently being used you can run the below command from the *command line*:

```
jupyter --paths
```

The following command shows the data directory specifically:

```
jupyter --data-dir
```

Runtime files

Things like connection files, which are only useful for the lifetime of a particular process, have a runtime directory.

On Linux and other free desktop platforms, these runtime files are stored in \$XDG_RUNTIME_DIR/jupyter by default. On other platforms, it's a runtime/ subdirectory of the user's data directory (second row of the table above).

An environment variable may also be used to set the runtime directory.

JUPYTER_RUNTIME_DIR

Set this to override where Jupyter stores runtime files.

As mentioned above, to list the config directories currently being used you can run the below command from the *command line*:

```
jupyter --paths
```

The following command shows the runtime directory specifically:

```
jupyter --runtime-dir
```

Summary

JUPYTER_CONFIG_DIR for config file location

JUPYTER_CONFIG_PATH for config file locations

JUPYTER_PATH for datafile directory locations

JUPYTER_DATA_DIR for data file location

JUPYTER_RUNTIME_DIR for runtime file location

See also:

`jupyter_core.paths`

The Python API to locate these directories.

The jupyter Command

Locate these directories from the command line.

Jupyter's Common Configuration Approach

Contents

- *Summary*
- *The Python config file*
- *Command line options for configuration*

Summary

Common Jupyter configuration system The Jupyter applications have a common config system, and a common *config directory*. By default, this directory is `~/ .jupyter`.

Kernel configuration directories If kernels use config files, these will normally be organized in separate directories for each kernel. For instance, the IPython kernel looks for files in the *IPython directory* instead of the default Jupyter directory `~/ .jupyter`.

The Python config file

To create a default config file, run:

```
jupyter {application} --generate-config
```

The generated file will be named `jupyter_application_config.py`.

By editing the `jupyter_application_config.py` file, you can configure class attributes like this:

```
c.NotebookApp.port = 8754
```

Be careful with spelling. Incorrect names will simply be ignored, with no error message.

To add to a collection which may have already been defined elsewhere, you can use methods like those found on lists, dicts and sets: `append`, `extend`, `prepend()` (like `extend`, but at the front), `add`, and `update` (which works both for dicts and sets):

```
c.TemplateExporter.template_path.append('./templates')
```

Command line options for configuration

Every configurable value can also be set from the command line and passed as an argument, using this syntax:

```
jupyter notebook --NotebookApp.port=8754
```

Frequently used options will also have short aliases and flags, such as `--port 8754` or `--no-browser`.

To see the abbreviated options, pass `--help` or `--help-all` as follows:

```
jupyter {application} --help      # Just the short options
jupyter {application} --help-all  # Includes options without short names
```

Command line options **will override** options set within a configuration file.

See also:

[traitlets.config](#)

The low-level architecture of this config system.

3.2.2 How do I decide which packages I need?

Jupyter can be used for many different use-cases. Below are a few user stories for when and how you might use tools in the Jupyter ecosystem, as well as a diagram that helps lay out some of your options.

Narratives and Use Cases

Notebook Narratives

Contents

- *Description*
- *Narrative examples*

Description

The Notebook Narratives explore uses of the Jupyter Notebook in a variety of applications.

Narrative examples

- Using the Notebook for data exploration
- Using extensions and widgets
- Using nbconvert for code execution and workflow simplification
- Using nbconvert for publishing
- Using multiple language kernels

Note: We're actively working on this section of the documentation to improve it for you. Thanks for your patience.

JupyterHub Narratives

Contents

- *Description*
- *Narrative examples*

Description

JupyterHub Narratives explore deployment and scaling of the Jupyter Notebook for a group of users. JupyterHub allows flexibility in configuration and deployment which makes JupyterHub valuable to education, industry research teams, and service providers. In these Narratives, we will look at differences in deployment, deployment advantages, and best practices.

Narrative examples

- A basic JupyterHub deployment
- A [reference deployment of JupyterHub using Docker](#)
- Teaching a Course with JupyterHub and nbgrader using a [reference deployment on a single server and Ansible scripts](#) to automate set up
- Teaching a Course with JupyterHub, nbgrader, and containers
- JupyterHub deployments using Containers including Docker

Note: We're actively working on this section of the documentation to improve it for you. Thanks for your patience.

Narratives - Building blocks

Contents

- *Description*
- *Narrative examples*

Description

This section presents some examples of integrating different projects together. These projects form the foundation of innovative services and provide building blocks for future applications.

Narrative examples

- A Narrative about Creating Dashboards
- A Narrative about Thebe
- A Narrative about Hydrogen

Note: We're actively working on this section of the documentation to improve it for you. Thanks for your patience.

Jupyter for Data Science

The purpose of this page is to highlight kernels and other projects that are central to the usage of Jupyter in data science. This page is not meant to be comprehensive or unbiased, but rather to provide an opinionated view of the usage of Jupyter in data science based on our interactions with users.

The following Jupyter kernels are widely used in data science:

- **python**
 - IPython ([GitHub Repo](#))
- **R**
 - IRkernel ([Documentation](#), [GitHub Repo](#))
 - IRdisplay ([GitHub Repo](#))
 - repr ([GitHub Repo](#))
- **Julia**
 - IJulia Kernel ([GitHub Repo](#))
 - Interactive Widgets ([GitHub Repo](#))
- Bash ([GitHub Repo](#))

Jupyter and Scientific Computing

Note: We're actively working on this section of the documentation to improve it for you. Thanks for your patience.

Jupyter in Education

Note: We're actively working on this section of the documentation to improve it for you. Thanks for your patience.

Jupyter in the Enterprise

Contents

- [Description](#)
- [Example Use-Cases](#)

Description

Businesses, especially those that started their 'digital transformation' journey, are producing ever-increasing volumes of data. Enterprise data science aims to unearth the hidden value of those digital assets, which are typically siloed, uncategorized, and inaccessible to humans.

Jupyter and JupyterHub can play a major role in related initiatives, especially in companies with an established open-source culture. The intent of this page is to provide you with ideas how Jupyter technology can fit into *your* organization's processes and system landscapes, by providing real-world examples and showcases.

Example Use-Cases

- [Beyond Interactive: Notebook Innovation at Netflix](#)
 - [Part 2: Scheduling Notebooks at Netflix](#)
- [PayPal Notebooks: Data science and machine learning at scale, powered by Jupyter \(JupyterCon 2018 · video\)](#)
- [Bloomberg BQuant platform](#)
- [Jupyter & Python in the corporate LAN](#)
- [DevOps Intelligence with JupyterHub](#)

Note: We're actively working on this section of the documentation to improve it for you. If you've got a suggestion for a resource that would be helpful, please create an issue or a pull request!

What are Narratives?

Narratives are *collaborative*, *shareable*, *publishable*, and *reproducible*. We believe that Narratives help both yourself and other researchers by sharing your use of Jupyter projects, technical specifics of your deployment, and installation and configuration tips so that others can learn from your experiences.

3.2.3 Advanced topics

Advanced Use Cases

Migrating from IPython Notebook

Contents

- *Abstract*
- *Understanding the Migration Process*
 - *Automatic migration of files*
 - *Where have my configuration files gone?*
- *Finding the Location of Important Files*
 - *Configuration files*
 - *Data files: kernelspecs and notebook extensions*
- *Since Jupyter does not have profiles, how do I customize it?*
 - *Changing the Jupyter notebook configuration directory*
 - *Changing the Jupyter notebook configuration file*
 - *Changing IPython's profile using custom kernelspecs*
- *Understanding Installation Changes*
 - *Notebook extensions*
 - *Kernels*
- *Understanding Changes in imports*

Abstract

The **Big Split** moved IPython's various language-agnostic components under the Jupyter umbrella. Going forward, Jupyter will contain the language-agnostic projects that serve many languages. IPython will continue to focus on Python and its use with Jupyter.

This document describes what has changed, and how you may need to modify your code or configuration when migrating from IPython version 3 to Jupyter.

Understanding the Migration Process

Automatic migration of files

The first time you run any `jupyter` command, it will perform an automatic migration of files. The automatic migration process **copies** files, instead of moving files, leaving the originals in place and the copies in the Jupyter file locations. You can re-run the migration, if needed, by calling `jupyter migrate`. Your custom configuration will be migrated automatically and should work with Jupyter without further editing. When you update or modify your configuration in the future, please keep in mind that the file locations may have changed.

Where have my configuration files gone?

Also known as: “Why isn’t my configuration having any effect anymore?”

Jupyter splitting out from IPython means that the locations of some files have moved, and Jupyter projects have not inherited everything from how IPython did it.

When you start your first Jupyter application, the relevant configuration files are automatically copied to their new Jupyter locations. The original configuration files in the IPython locations have no effect on Jupyter’s execution. If you accidentally edit your original IPython config file, you may not see the desired effect with Jupyter now. You should check that you are editing Jupyter’s configuration file, and you should see the expected effect after restarting the Jupyter server.

Finding the Location of Important Files

This section provides quick reference for common locations of IPython 3 files and the migrated Jupyter files.

Configuration files

Configuration files customize Jupyter to the user’s preferences. The migrated files should all be **automatically copied** to their new Jupyter locations. Here are the location changes:

IPython location		Jupyter location
<code>~/.ipython/profile_default/static/custom</code>	→	<code>~/.jupyter/custom</code>
<code>~/.ipython/profile_default/ipython_notebook_config.py</code>	→	<code>~/.jupyter/jupyter_notebook_config.py</code>
<code>~/.ipython/profile_default/ipython_nbconvert_config.py</code>	→	<code>~/.jupyter/jupyter_nbconvert_config.py</code>
<code>~/.ipython/profile_default/ipython_qtconsole_config.py</code>	→	<code>~/.jupyter/jupyter_qtconsole_config.py</code>
<code>~/.ipython/profile_default/ipython_console_config.py</code>	→	<code>~/.jupyter/jupyter_console_config.py</code>

To choose a directory location other than the default `~/.jupyter`, set the `JUPYTER_CONFIG_DIR` environment variable. You may need to run `jupyter migrate` after setting the environment variable for files to be copied to the desired directory.

Data files: kernelspecs and notebook extensions

Data files include files, other than configuration files, which are user installed. Examples include kernelspecs and notebook extensions. Like the configuration files, data files are also **automatically migrated** to their new Jupyter locations.

In **IPython 3**, data files lived in `~/ .ipython`.

In **Jupyter**, data files use platform-appropriate locations:

- OS X: `~/Library/Jupyter`
- Windows: the location specified in `%APPDATA%` environment variable
- Elsewhere, `$XDG_DATA_HOME` is respected, with the default of `~/ .local/share/jupyter`

In all cases, the `JUPYTER_DATA_DIR` environment variable can be used to set a location explicitly.

Data files installed system-wide (e.g. in `/usr/local/share/jupyter`) have not changed. Per-user installation of data files has changed location from `.ipython` to the platform-appropriate Jupyter location.

Since Jupyter does not have profiles, how do I customize it?

While IPython has the concept of *profiles*, **Jupyter does not have profiles**.

In IPython, profiles are collections of configuration and runtime files. Inside the IPython directory (`~/ .ipython`), there are directories with names like `profile_default` or `profile_demo`. In each of these are configuration files (`ipython_config.py`, `ipython_notebook_config.py`) and runtime files (`history.sqlite`, `security/kernel-*.json`). Profiles could be used to switch between configurations of IPython.

Previously, people could use commands like `ipython notebook --profile demo` to set the profile for *both* the notebook server and the IPython kernel. This is no longer possible in one go with Jupyter, just like it wasn't possible in IPython 3 for any other kernels.

Changing the Jupyter notebook configuration directory

If you want to change the notebook configuration, you can set the `JUPYTER_CONFIG_DIR`:

```
JUPYTER_CONFIG_DIR=./jupyter_config
jupyter notebook
```

Changing the Jupyter notebook configuration file

If you just want to change the config file, you can do:

```
jupyter notebook --config=/path/to/myconfig.py
```

Changing IPython's profile using custom kernelspecs

If you do want to change the IPython kernel's profile, you can't do this at the server command-line anymore. Kernel arguments must be changed by modifying the kernelspec. You can do this without relaunching the server. Kernelspec changes take effect every time you start a new kernel. However, there isn't a great way to modify the kernelspecs. One approach uses `jupyter kernelspec list` to find the `kernel.json` file and then modifies it, e.g. `kernels/python3/kernel.json`, by hand. Alternatively, [a2km](#) is an experimental project that tries to make these things easier.

For example, add the `--profile` option to a custom kernelspec under `kernels/mycustom/kernel.json` (see the Jupyter kernelspec directions [here](#)):

```
{
  "argv": ["python", "-m", "ipykernel",
           "--profile=my-ipython-profile",
           "-f", "{connection_file}"],
  "display_name": "Custom Profile Python",
  "language": "python"
}
```

You can then run Jupyter with the `--kernel=mycustom` command-line option and IPython will find the appropriate profile.

Understanding Installation Changes

See the [Install and Use](#) page for more information about installing Jupyter. Jupyter automatically migrates some things, like Notebook extensions and kernels.

Notebook extensions

Any IPython notebook extensions should be **automatically migrated** as part of the data files migration.

Notebook extensions were installed with:

```
ipython install-nbextension [--user] EXTENSION
```

Now, extensions are installed with:

```
jupyter nbextension install [--user] EXTENSION
```

The notebook extensions will be installed in a system-wide location (e.g. `/usr/local/share/jupyter/nbextensions`). If doing a `--user` install, the notebook extensions will go in the `JUPYTER_DATA_DIR` location. Installation **SHOULD NOT** be done manually by guessing where the files should go.

Kernels

Kernels are installed in much the same way as notebook extensions. They will also be **automatically migrated**.

Kernel specs used to be installed with:

```
ipython kernelspec install [--user] KERNEL
```

They are now installed with:

```
jupyter kernelspec install [--user] KERNEL
```

By default, kernel specs will go in a system-wide location (e.g. `/usr/local/share/jupyter/kernels`). If doing a `--user` install, the kernel specs will go in the `JUPYTER_DATA_DIR` location. Installation **SHOULD NOT** be done manually by guessing where the files should go.

Understanding Changes in imports

IPython 4.0 includes shims to manage dependencies; so, all imports that work on IPython 3 should continue to work on IPython 4. If you find any differences, please [let us know](#).

Some changes include:

IPython 3		Jupyter and IPython 4.0
<code>IPython.html</code>	→	<code>notebook</code>
<code>IPython.html.widgets</code>	→	<code>ipywidgets</code>
<code>IPython.kernel</code>	→	<code>jupyter_client</code> , <code>ipykernel</code>
<code>IPython.parallel</code>	→	<code>ipyparallel</code>
<code>IPython.qt.console</code>	→	<code>qtconsole</code>
<code>IPython.utils.traitlets</code>	→	<code>traitlets</code>
<code>IPython.config</code>	→	<code>traitlets.config</code>

Important: The `IPython.kernel` Split

`IPython.kernel` became two packages:

- `jupyter_client` for the Jupyter client-side APIs.
 - `ipykernel` for Jupyter's IPython kernel
-

3.3 Projects

The Jupyter community is composed of several sub-communities and projects. These are organized around particular use-cases, users, or other aspects of the Jupyter community. This section contains information to help navigate these projects both from the perspective of a user and a community member.

3.3.1 Jupyter Projects and Communities

Information relevant to understanding the many projects in the Jupyter ecosystem, including their technical components and how they work and relate to one another.

Jupyter User Interfaces

The Jupyter user interfaces offer a foundation of interactive computing environments where scientific computing, data science, and analytics can be performed using a wide range of programming languages.

Jupyter Notebook

Web-based application for authoring documents that combine live-code with narrative text, equations and visualizations. [Documentation](#) | [Repo](#)

Jupyter Console

Terminal based console for interactive computing. [Documentation](#) | [Repo](#)

Jupyter QtConsole

Qt application for interactive computing with rich output. [Documentation](#) | [Repo](#)

Kernels (Programming Languages)

The Jupyter team maintains the [IPython](#) project which is shipped as a default kernel (as *ipykernel*) in a number of Jupyter clients. Many other languages, in addition to Python, may be used in the notebook.

The community maintains many other language kernels, and new kernels become available often. Please see the [list of available kernels](#) for additional languages and [kernel installation instructions](#) to begin using these language kernels.

Kernels

Kernels are *programming language specific* processes that run independently and interact with the Jupyter Applications and their user interfaces. [ipykernel](#) is the reference Jupyter kernel built on top of [IPython](#), providing a powerful environment for interactive computing in Python.

[jupyter-client](#) contains the authoritative description of the Jupyter messaging protocol which is used by clients to communicate with the kernels.

[Xeus](#) facilitates the implementation of kernels for Jupyter and provides a number of kernels such as [xeus-cling](#) (C++), [xeus-sql](#) (SQL) and many more.

IPython

interactive computing in Python. [Documentation](#) | [Repo](#)

ipykernel

the wrapper around IPython which enables using IPython as a kernel [Repo](#)

Xeus

library facilitating the implementation of kernels for Jupyter. It implements the Jupyter Kernel protocol so developers can focus on implementing the interpreter part of the kernel. [Documentation](#) | [Repo](#)

See also:

[Jupyter kernels](#)

A full list of kernels available for other languages. Many of these kernels are developed by third parties and may or may not be stable.

Education

Jupyter Notebooks offer exciting and creative possibilities in education. The following subprojects are focused on supporting the use of Jupyter Notebook in a variety of educational settings.

Teaching and Learning with Jupyter is a book about using Jupyter in teaching and learning.

nbgrader

tools for managing, grading, and reporting of notebook based assignments. [Documentation](#) | [Repo](#)

jupyter4edu

GitHub organization hosting community resources for Jupyter in education

Execution

Notebooks can be run outside of the browser interface with the following utility subprojects.

nbclient

NBClient lets you execute notebooks from different contexts, including the command-line. [Documentation](#) | [Repo](#)

Deployment and infrastructure

To serve a variety of users and use cases, these subprojects are being developed to support notebook deployment in various contexts, including multiuser capabilities and secure, scalable cloud deployments.

jupyterhub

Multi-user notebook for organizations with pluggable authentication and scalability. [Documentation](#) | [Repo](#)

nbviewer

Share notebooks as static HTML on the web. [Documentation](#) | [Repo](#)

Binder

Turn a Git repo into a collection of interactive notebooks [Documentation](#) | [Repo](#)

dockerspawner

Deploy notebooks for 'jupyterhub' inside Docker containers. [Documentation](#) | [Repo](#)

docker-stacks

Stacks of Jupyter applications and kernels as Docker containers. [Documentation](#) | [Repo](#)

Formatting and Conversion

Notebooks are rich interactive documents that combine live code, narrative text (using markdown), visualizations, and other rich media. The following utility subprojects allow programmatic format conversion and manipulation of notebook documents.

nbconvert

Convert dynamic notebooks to static formats such as HTML, Markdown, LaTeX/PDF, and reStructuredText. [Documentation](#) | [Repo](#)

nbformat

Work with notebook documents programmatically. [Documentation](#) | [Repo](#)

IPython

Contents

- *Description*
- *Background*
- *Resources*

Description

IPython provides a rich architecture for interactive computing with:

- A powerful interactive shell.
- A kernel for Jupyter.
- Support for interactive data visualization and use of GUI toolkits.
- Flexible, embeddable interpreters to load into your own projects.
- Easy to use, high performance tools for parallel computing.

Background

IPython is a growing project, with increasingly language-agnostic components. IPython 3.x was the last monolithic release of IPython, containing the notebook server, qtconsole, etc. As of IPython 4.0, the language-agnostic parts of the project: the notebook format, message protocol, qtconsole, notebook web application, etc. have moved to new projects under the name Jupyter. IPython itself is focused on interactive Python, part of which is providing a Python kernel for Jupyter.

Resources

The projects with repos in the IPython organization on GitHub include:

- IPython [ipykernel](#) interactive computing in Python.
- [ipyparallel](#) lightweight parallel computing in Python offering seamless notebook integration
- [ipywidgets](#) interactive widgets for Python in the Jupyter Notebook

Core Building Blocks

The Jupyter architecture relies on these projects' specifications and implementation.

[jupyter_client](#)

The specification of the Jupyter message protocol and a client library in Python. [Documentation](#) | [Repo](#)

[jupyter_core](#)

Core functionality and miscellaneous utilities. [Documentation](#) | [Repo](#)

Incubator Projects

Contents

- [Descriptions](#)
- [Try the Incubator Projects](#)

The Jupyter incubator gives emerging projects a place to evolve.

Descriptions


Interesting projects include:

- [content management extensions](#) - Jupyter Content Management Extensions
- [dashboards](#) - Jupyter Dynamic Dashboards from Notebooks
- [declarative widgets](#) - Jupyter Declarative Widgets Extension
- [kernel gateway bundlers](#) - Converts a notebook to a kernel gateway microservice bundle for download
- [showcase](#) - A spot to try demos of one or more incubating Jupyter projects in [Binder](#)
- [sparkmagic](#) - Jupyter magics and kernels for working with remote Spark clusters
- [traitletypes](#) - Traitlets types for NumPy, SciPy and friends

There's also a [repository with proposals](#) of projects wishing to enter the incubator.

Try the Incubator Projects

The [showcase](#) application allows you to try demos of one or more incubating Jupyter projects in [Binder](#). Just head over to the [showcase](#) repo and press the *Launch Binder* button badge to launch the online trial. You should see an interactive notebook similar to this one:

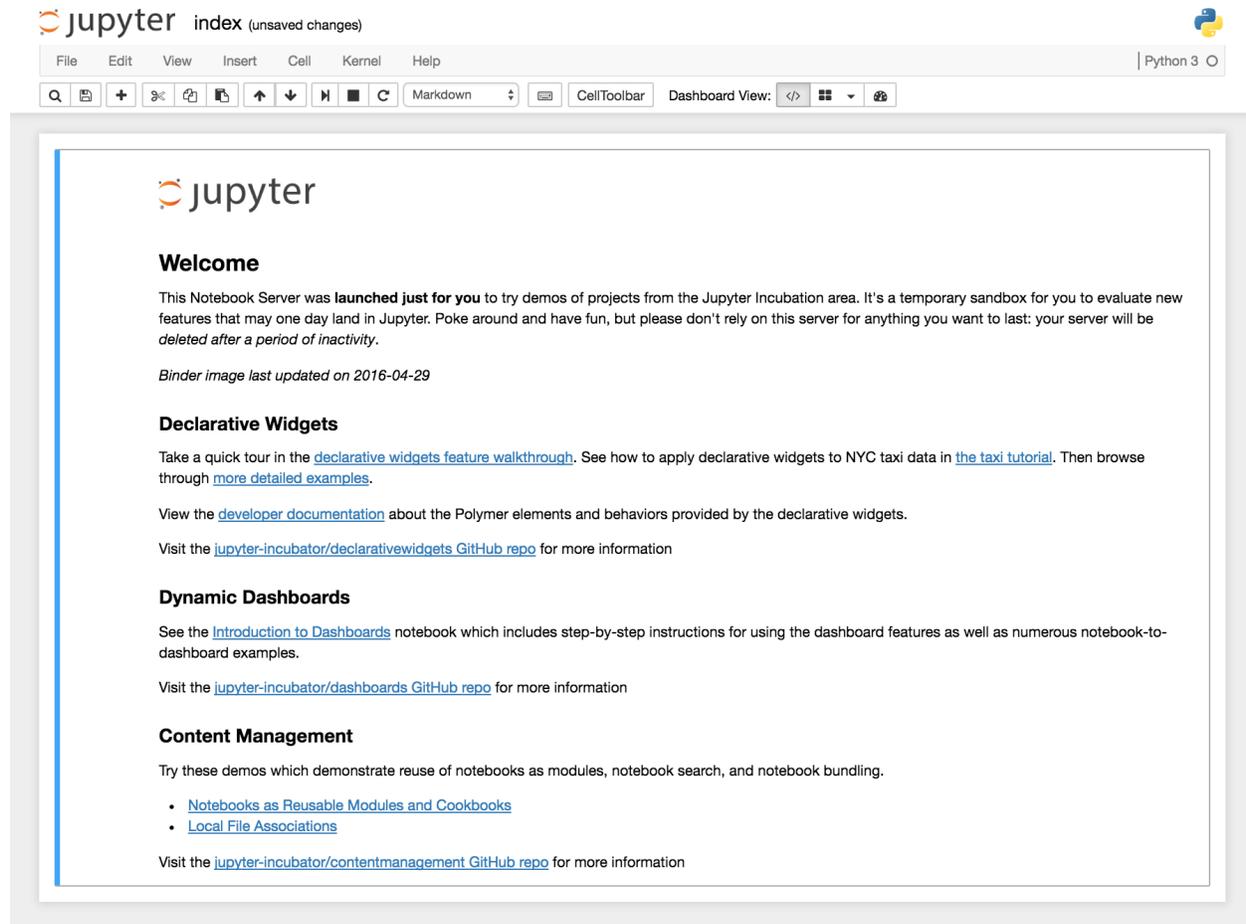

The screenshot shows a Jupyter Notebook interface. At the top, there is a header with the Jupyter logo and the text "index (unsaved changes)". Below the header is a menu bar with options: File, Edit, View, Insert, Cell, Kernel, Help. To the right of the menu bar, it says "Python 3". Below the menu bar is a toolbar with various icons for search, home, add, undo, redo, refresh, and other actions. The main content area displays a welcome message from the Jupyter Incubation area, including links to declarative widgets, dynamic dashboards, and content management.

jupyter index (unsaved changes)

File Edit View Insert Cell Kernel Help Python 3

Q Home + Undo Redo Refresh CellToolbar Dashboard View: </> [Grid Icon] [Close Icon]

jupyter

Welcome

This Notebook Server was **launched just for you** to try demos of projects from the Jupyter Incubation area. It's a temporary sandbox for you to evaluate new features that may one day land in Jupyter. Poke around and have fun, but please don't rely on this server for anything you want to last: your server will be *deleted after a period of inactivity*.

Binder image last updated on 2016-04-29

Declarative Widgets

Take a quick tour in the [declarative widgets feature walkthrough](#). See how to apply declarative widgets to NYC taxi data in [the taxi tutorial](#). Then browse through [more detailed examples](#).

View the [developer documentation](#) about the Polymer elements and behaviors provided by the declarative widgets.

Visit the [jupyter-incubator/declarativewidgets GitHub repo](#) for more information

Dynamic Dashboards

See the [Introduction to Dashboards](#) notebook which includes step-by-step instructions for using the dashboard features as well as numerous notebook-to-dashboard examples.

Visit the [jupyter-incubator/dashboards GitHub repo](#) for more information

Content Management

Try these demos which demonstrate reuse of notebooks as modules, notebook search, and notebook bundling.

- [Notebooks as Reusable Modules and Cookbooks](#)
- [Local File Associations](#)

Visit the [jupyter-incubator/contentmanagement GitHub repo](#) for more information


3.3.2 More information

Architecture

This page has information about the different architectural designs of core pieces in the Jupyter ecosystem. Some of these are individual projects, and others show the relationships between projects.

Projects overview

Below is a high level visual overview of project relationships. It is current as of 2022.

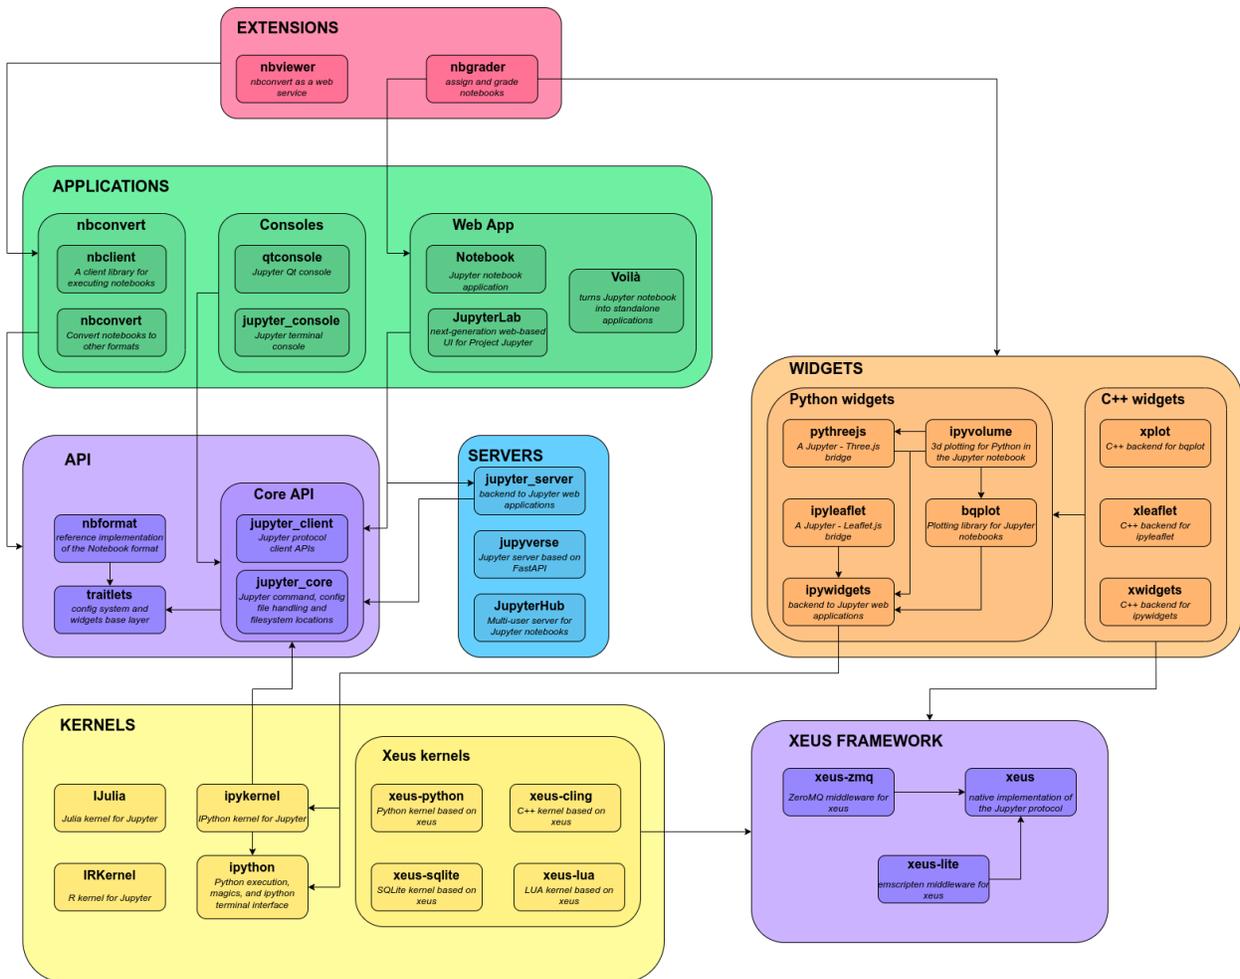

IPython Kernel

This section focuses on IPython and kernels. When we discuss IPython, we talk about two fundamental roles:

- Terminal IPython as the familiar REPL
- The IPython kernel, `IPykernel` that provides computation and communication with the frontend interfaces, like the notebook

Terminal IPython

When you type `ipython`, you get the original IPython interface, running in the terminal. It does something like this:


```
while True:
    code = input(">>> ")
    exec(code)
```

Of course, it's much more complex, because it has to deal with multi-line code, tab completion using `readline`, magic commands, and so on. But the model is like code example: prompt the user for some code, and when they've entered it, execute it in the same process. This model is often called a *REPL*, or Read-Eval-Print-Loop.

The IPython Kernel

All the other interfaces — the Notebook, the Qt console, `ipython console` in the terminal, and third party interfaces — use the IPython Kernel. IPykernel is a separate process which is responsible for running user code, and things like computing possible completions. Frontends, like the notebook or the Qt console, communicate with the IPython Kernel using JSON messages sent over [ZeroMQ](#) sockets; the protocol used between the frontends and the IPython Kernel is described in [Messaging in Jupyter](#).

The core execution machinery for the kernel is shared with terminal IPython.

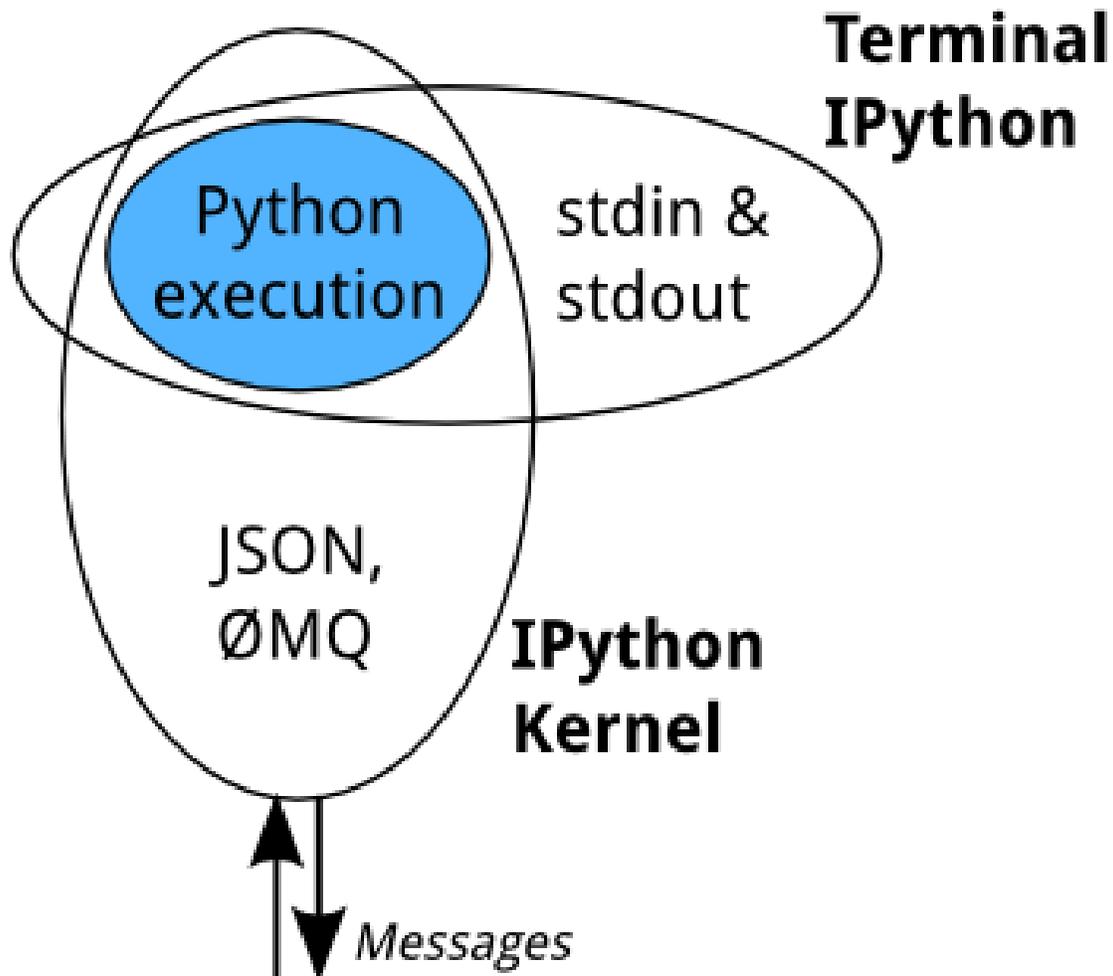


A kernel process can be connected to more than one frontend simultaneously. In this case, the different frontends will have access to the same variables.

This design was intended to allow easy development of different frontends based on the same kernel, but it also made it possible to support new languages in the same frontends, by developing kernels in those languages, and we are refining IPython to make that more practical.

Today, there are three ways to develop a kernel for another language:

- Wrapper kernels reuse the communications machinery from IPykernel, and implement only the core execution part.
- Native kernels implement execution and communications in the target language.
- Kernels based on `xeus`, a native implementation of the protocol, implement the language-specific part of the kernels. Contrary to the wrapper approach, `xeus` does not depend on a python runtime.

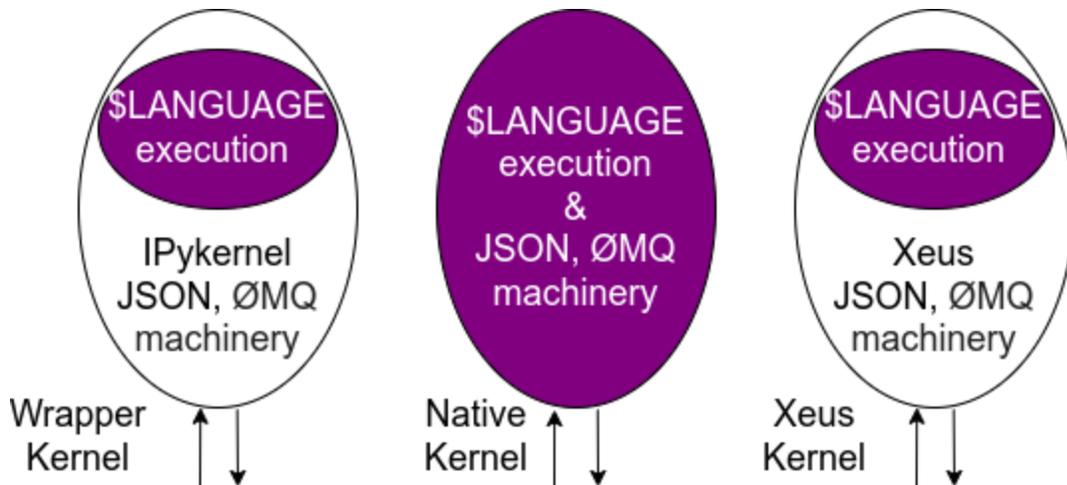

Wrapper kernels are easier to write quickly for languages that have good Python wrappers, like `octave_kernel`, or languages where it's impractical to implement the communications machinery, like `bash_kernel`. Native kernels are likely to be better maintained by the community using them, like `IJulia` or `IHaskell`. Xeus kernels are easy to write when the language interpreter provides a C++ or a C API.

See also:

[Making kernels for Jupyter](#)


Kernels

The Jupyter Notebook format

Jupyter Notebooks are structured data that represent your code, metadata, content, and outputs. When saved to disk, the notebook uses the extension `.ipynb`, and uses a JSON structure. For more information about the notebook format structure and specification, see [the nbformat documentation](#).

The Jupyter Notebook Interface


Jupyter Notebook and its flexible interface extends the notebook beyond code to visualization, multimedia, collaboration, and more. In addition to running your code, it stores code and output, together with markdown notes, in an editable document called a notebook. When you save it, this is sent from your browser to the Jupyter server, which saves it on disk as a JSON file with a `.ipynb` extension.

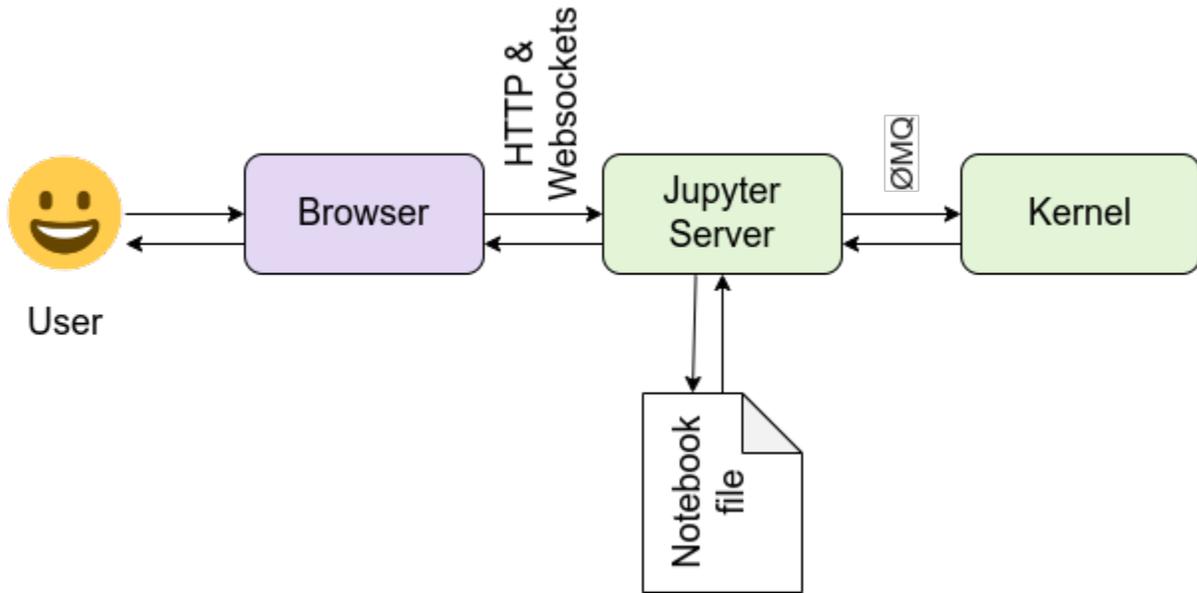

The Jupyter server is a communication hub. The browser, notebook file on disk, and kernel cannot talk to each other directly. They communicate through the Jupyter server. The Jupyter server, not the kernel, is responsible for saving and loading notebooks, so you can edit notebooks even if you don't have the kernel for that language—you just won't be able to run code. The kernel doesn't know anything about the notebook document: it just gets sent cells of code to execute when the user runs them.

Exporting Jupyter Notebooks to other formats

The [Nbconvert tool](#) in Jupyter converts notebook files to other formats, such as HTML, LaTeX, or reStructuredText. This conversion goes through a series of steps:

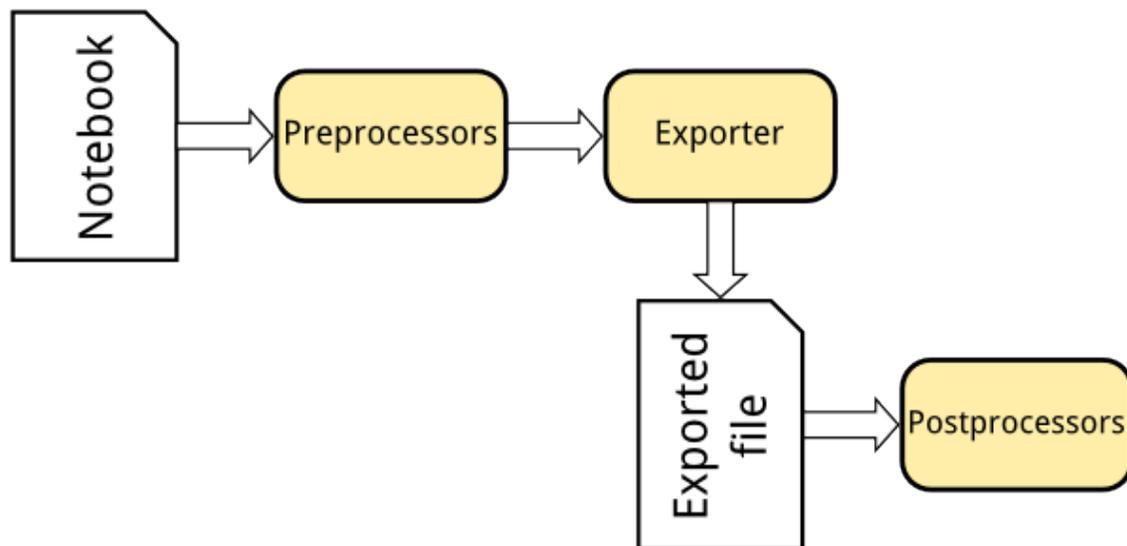

1. Preprocessors modify the notebook in memory. E.g. ExecutePreprocessor runs the code in the notebook and updates the output.

2. An exporter converts the notebook to another file format. Most of the exporters use templates for this.
3. Postprocessors work on the file produced by exporting.

The `nbviewer` website uses `nbconvert` with the HTML exporter. When you give it a URL, it fetches the notebook from that URL, converts it to HTML, and serves that HTML to you.

IPython.parallel

IPython also includes a parallel computing framework, `IPython.parallel`. This allows you to control many individual engines, which are an extended version of the IPython kernel described above.

JupyterHub and Binder

JupyterHub is a multi-user Hub that spawns, manages, and proxies multiple instances of the single-user Jupyter notebook server. This can be used to serve a variety of interfaces and environments, and can be run on many kinds of infrastructure. JupyterHub on Kubernetes is a Helm Chart for running JupyterHub on kubernetes infrastructure, and BinderHub is a customized JupyterHub deployment for shareable, reproducible interactive computing environments.

The links below describe the architecture of JupyterHub and several distributions of JupyterHub.

- [JupyterHub core architecture](#)
- [JupyterHub for Kubernetes architecture](#)
- [BinderHub architecture](#)

JupyterLab

JupyterLab is a flexible, extensible interface for interactive computing. Below are a few links that are useful for understanding the JupyterLab architecture.

- [JupyterLab document model](#)
- [JupyterLab notebook model](#)
- [Design patterns in JupyterLab](#)

Project Documentation

Contents

- *Jupyter User Interfaces*
- *JupyterHub*
- *Education*
- *Execution*
- *Notebook Conversion and Formatting*
- *Kernels*
- *IPython*

- *Deployment*
- *JupyterLab*
- *Architecture*

Links to **information on usage, configuration and development** hosted on Read The Docs or in the GitHub project repo.

Jupyter User Interfaces

- Jupyter Notebook
- jupyter_console
- qtconsole

JupyterHub

- JupyterHub
- configurable-http-proxy
- dockerspawner
- ldapauthenticator
- oauthenticator
- sudospawner

Education

- nbgrader

Execution

- nbclient

Notebook Conversion and Formatting

- nbconvert
- nbformat

Kernels

- [IPython](#)
- [IRkernel](#)
- [IJulia](#)
- [List of community maintained language kernels](#)

IPython

- [IPython](#)
- [ipykernel](#)
- [ipyparallel](#)

Deployment

- [docker-stacks](#)
- [ipywidgets](#)
- [jupyter-drive](#)
- [jupyter-sphinx-theme](#)
- [kernel_gateway](#)
- [nbviewer](#)
- [tmpnb](#)
- [traitlets](#)

JupyterLab

- [jupyter-js-notebook](#)
- [jupyter-js-phosphide](#)
- [jupyter-js-plugins](#)
- [jupyter-js-services](#)
- [jupyter-js-ui](#)
- [jupyter-js-utils](#)

Architecture

- [jupyter_client](#)
- [jupyter_core](#)

Release Notes

When projects release a new version, they often include “release notes” with information about improvements, bug-fixes, and other changes. These projects are the best source of information about what has recently changed.

Below you’ll find links to the release notes for several major projects in the Jupyter ecosystem.

Jupyter Notebook

You can find a changelog at [the Jupyter Notebook documentation](#).

JupyterLab

You can find a changelog at [the JupyterLab documentation](#).

JupyterHub

You can find a list of changelogs in the JupyterHub community within the [JupyterHub team compass documentation](#).

3.4 Community

Welcome to the Community Guides for Jupyter. These guides are intended to provide information about the Jupyter community such as background, events, and communication channels. As our community is highly dynamic, information may change, and we will do our best to keep it up to date.

3.4.1 Community Call Notes

The Jupyter Community Call is an open video call. Think of this as a “monthly, virtual JupyterCon”. It’s a place for *anyone* to announce and share fun things happening in the Jupyter community. Everyone is welcome (even if you’re not presenting). We record these videos and post them on YouTube. For more information, [read this discourse thread](#).

Jupyter Community Call 11/29

Date: November 29, 2022, at 7am Pacific (in your timezone)

[Discourse Youtube](#)

Please note:

- Community calls are recorded and posted to [this playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

There were no short reports this month.

Agenda Items

- **Gabriela Vives** Present a usability study done on JupyterLab
- **Eric Gao** Jupyter+Apache DolphinsSheduler Demo
- **Nick Bollweg** `jupikchr`: pikchr plain-text diagrams for JupyterLab, etc.

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [jupyter/surveys](#)
- [Jupyter community building committee](#)
- [JupyterLite as a frontend for software forges - Jupyter Discourse](#)

Attendees

Name	Institution	GitHub Handle
Yuze Ma	Alibaba Cloud	bobmayuze
Frederic Collonval	QuantStack	@fcollonval
Gabriela Vives	QuantStack	GabrielaVives
Matthew Seal	Noteable Inc	MSeal
Wayne Decatur	Upstate Medical University	fomightez
Eric Gao	Jupyter+Apache DolphinsSheduler Demo	EricGao888
tonyfast	unaffiliated	@tonyfast
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Plus 11 more.

Jupyter Community Call 10/25

Date: October 25, 2022, at 7am Pacific (in your [timezone](#))

[Discourse](#) [Youtube](#)

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- Shout out to all the cats and kittens on the call!
- **Sarah** JupyterHub is participating in Outreachy and has lots of applicants!
- **Isabela** Earlier this month, a group of people met to do [keyboard navigation manual tests on the Jupyter Notebook 7 prerelease](#). It was great to have people meeting to work on accessibility.
- **Steve** Python 3.11 was released yesterday.

Agenda Items

- **Jan-Hendrik Müller, Ricky Alinsky:** A new perspective on creating example galleries from notebooks.
 - Plywood gallery (and its VS Code extension!)
 - <https://discourse.jupyter.org/t/plywood-gallery-generate-python-documentation-via-notebooks/16510>
- **deathbeds:** a bike shed means blood shed
 - “when markdown and python collide” - <https://tonyfast.github.io/tonyfast/run/lab/index.html?path=xxii/oct/2022-10-21-markdown-future.ipynb?room=deathbeds-more-like-deft-breads>
 - * <https://github.com/tonyfast/midgy>
 - * <https://github.com/deathbeds/pidgy>
 - * <https://github.com/deathbeds/importnb>
 - * <https://github.com/tonyfast/tonyfast>
 - “Spooky-ber Note-boo-ks” with [jupyterlab-deck](#) and a history of presenting in notebooks and a reporting deck (with Robot Framework).
- **Debra Chen, Niko Zeng:** Invitation for joint-holding community meetup

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [Open Source Design Discourse](#)
- [Jupyter Discourse](#)

Attendees

Name	Institution	GitHub Handle
Jan-Hendrik Müller	University of Göttingen	@kolibril13
Ricky M. Alinsky	GUSTO University	@Rickaym
Steve Silvester	MongoDB	@blink1073
Debra Chen	DolphinScheduler community	@debrachena
Sarah Gibson	2i2c	@sgibson91
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Plus 7 more.

Jupyter Community Call 09/27

Date: September 27, 2022, at 7am Pacific (in your [timezone](#))

[Discourse](#)

[Youtube](#)

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make short announcements (without a need for discussion).

- [jupyterlite 0.1.0b13](#) is released, with support for [ipywidgets 8](#)

Agenda Items

- Peter Vidos [ipyvizzu-story](#) - A short intro of a new, open-source data storytelling tool for Jupyter Notebook.
 - Repo: <https://github.com/vizzuhq/ipyvizzu-story>
 - Example (HTML): https://vizzuhq.github.io/ipyvizzu-story/examples/demo/ipyvizzu-story_example.html
- **Yuze** Questions about Jupyter community in the APAC region

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [Books by Alberto Cairo](#)
- [Animated charts and story telling with IpyVizzu](#)
- [Charting Data guidelines - Apple Human Interface Guidelines](#)
- [Chartability](#)
- [Join the Vizzu Community Slack](#)
- [JupyterHub team compass](#)

Attendees

Name	Institution	GitHub Handle
AT Darian	QuantStack	@afshin
Alex Bozarth	IBM	@ajbozarth
Yuze Ma	Alibaba Group	@bobmayuze
Wayne Decatur	Upstate Med. University	@fomightez
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Plus 5 more

Jupyter Community Call 08/30

Date: August 30, 2022, at 7am Pacific (in your timezone)

[Discourse](#)

[Youtube](#)

Please note:

- Community calls are recorded and posted to [this playlist](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- **Isabela** Shout out to the different group of people we have today! New faces or not, thanks for taking the initiative to be here.

Agenda Items

- **Naas** Presenting Naas open source framework to create data products from notebook templates.
 - [Jupyter Naas GitHub Repo](#)
 - Three main repos: [Naas](#), [awesome-notebooks](#), and [drivers](#).
 - * Future facing work can be sampled at [nass-content-engine](#). The idea is templates as widgets.
- **Linda or Bosco (Frederic as backup)** - Demonstrate new jupyterlab-git features added through the [MLH Summer 22](#) program.
 - New features are already available in v0.39.0, try it with `pip install -U jupyterlab-git` [Full changelog is available there](#)
- **Darian**
 - [Lumino 2](#) update leading up to JupyterLab 4 and Notebook 7 ([migrating JupyterLab to Lumino 2](#))
 - Jupyter Governance update

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [The Tyranny of Structurelessness](#) - Jo Freeman

Attendees

Name	Institution	GitHub Handle
Jeremy Ravenel	Naas	@jupyter-naas
Frederic Collonval	QuantStack	@fcollonval
AT Darian	QuantStack	@afshin
David Brochart	QuantStack	@davidbrochart
Maxime Jublou	Naas	@Dr0p42
Gabriel Fouasnon	Quansight Labs	@gabalafou
Wayne Decatur	Upstate Medical University	@fomightez
Alex Bozarth	IBM	@ajbozarth
Eric Holscher	Read the Docs	@ericholscher
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Plus 8 more.

Jupyter Community Call 07/26

Date: July 26, 2022, at 8am Pacific (in your [timezone](#))

Discourse

YouTube

Please note:

- Community calls are recorded and posted to [this playlist](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make short announcements (without a need for discussion).

- **Darian** Governance update: Executive Council, Software Steering Council, Distinguished Contributors
- **Darian** [Lumino 2](#)
- **rcthomas** Reminder on Github 2FA for Jupyter Project developers
 - <https://blog.jupyter.org/requiring-2fa-for-jupyter-github-organizations-ad15507da9b1>
- **nick** [voila-dashboards](#) almost works with lab (no more cdnjs/unpkg, etc.)
- **fcollonval** JupyterLab 3.4.4 released - [Changelog](#)
- **Isabela** JupyterLab accessibility calls are still happening, and everyone is welcome. Our next call is tomorrow at 10:15am Pacific!
- **nick** [ipywidgets latest docs](#) now include jupyterlite demos

Agenda Items

- **Isabela** Favorite community call memories/what you want next
 - Demos of work people are building on top of Jupyter (but not sales pitches)
 - “Pie”
 - Themes for calls!
 - Lightning talk length of share (right now we have one minute or ten)
 - “live demos are always good even if they’re incomplete”
 - “I’d like people to report a new thing they learned “today I learned” using a Jupyter notebook recently”
 - Sign up sheet to mix up hosts! Good for everyone to get experience and can bring in new energy.

- Recognize testers
- Once a quarter: “here’s four ways you can contribute” as a recurring topic so people get reminded and don’t have to watch the back catalog to hear it (or a list of projects to contribute to)

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [The New Soul Vegetarian Cookbook](https://www.amazon.com/New-Soul-Vegetarian-Cookbook/dp/0942683137) https://www.amazon.com/Grit-Cookbook-World-Wise-Down-Home-Recipes/dp/1556526482)

Attendees

Name	Institution	GitHub Handle
Frederic Collonval	QuantStack	@fcollonval
Simon Li	University of Dundee	@manics
A. T. Darian	QuantStack	@afshin
Wayne Decatur	Upstate University	@fomightez
Rollin Thomas	NERSC	@rcthomas
Jeremy Tuloup	QuantStack	@jtpio
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Plus 4 more.

Jupyter Community Call June 28

Date: June 28, 2022, at 3am Pacific (in your [timezone](#))

[Discourse](#)

[YouTube Link](#)

Please note:

- Community calls are recorded and posted to this [playlist](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It’s a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- Steve: coming soon - getting rid of `setuptools` for extension authors - work is being coordinated on a PR on [JupyterLab](#)
- Nick: `jupyterlite` kernels can now access contents directly

Agenda Items

- **Tony** ??? (how general is the `nbformat`?)
 - And where are we going next

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [My Brainfuck CPU - A simple Processor in Python via MyHDL \(part 1\)](#)
- [jmshea/digicom-jupyter Digital Communications JupyterLite Site](#)
- [Idea: Binder + JupyterLite = BinderLite? \(Jupyter Discourse\)](#)
- [Neal Brennan: 3 Mics](#)
- [Types - Web Assembly](#)

Attendees

Name	Institution	GitHub Handle
Steven Silvester	MongoDB	@blink1073
Nick Bollweg	Georgia Tech	@bollwyvl
A. T. Darian	QuantStack	@afshin
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf
Tony Fast	Quansight	@tonyfast

Plus 1 more.

Jupyter Community Call May 31

Date: May 31, 2022, at 7am Pacific (in your timezone)

Discourse

YouTube link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- **Isabela:** Shout out to the security team for rolling out awesome documentation on the [Jupyter Vulnerability Handling Process](#)!
- **Isabela:** Reminder that the [Jupyter Community Workshops call for proposals](#) has been extended! You can now apply until June 6.
- **Mike** Organising an internal intermediate/advanced jupyter training at Oxford, anything cool you would like to share with biomedical researchers?
 - Matthias: I would search a bit on the napari side.
 - Chris Holdgraf is in Europe and runs [2i2c](#), he might be a good person to ask.
 - Romeo: reach out about relevant talks
 - * Deep Learning in biomedical and genomics data
 - ...using JupyterLab
 - ...using Elyra Pipelines
 - * Deep Learning based image analysis in Radiology
 - * An overview and life demo of JupyterLab Extensions for Genomics
 - * An overview and life demo of JupyterLab Extensions for Life Science
- [Please don't disable authentication in Jupyter servers- Jupyter blog](#)
- **Matthias:** SciPy draft done! Hooray!
- **Gayle:** Shout out to Sylvain for speaking at the upcoming [PyData London](#)

Agenda Items

Add agenda items here **before** the meeting. We will reorganize the agenda so that it fits in the 60m meeting slot.

- **Name** This is an example of agenda item formatting.
- **Matthias** And <https://github.com/jupyter/jupyter.github.io/pull/696>, we'd love to know if some folks want to participate / help handle the process – no need to be a security expert.
- **Matthias** Question : Anything to organise about SciPy ?
 - Gayle: there is interest in organizing, but we need ideas! Reach out if there's something you'd like to organize.
 - Isabela: not aware of anything that has developed yet, but can ask around.
- **Isabela** Sharing two cool resources I don't see talked about often:
 - [jupyter/surveys](#)
 - [JupyterLab user stories](#)

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- A curated list of awesome Jupyter projects, libraries and resources at [markusschanta/awesome-jupyter](#)
- A curated list of awesome JupyterLab extensions and resources at [mauhai/awesome-jupyterlab](#)

Attendees

Name	Institution	GitHub Handle
Wayne Decatur	Upstate Medical University	@fomightez
Michał Krassowski	Oxford	@krassowski
Gayle Ollington	NumFOCUS	@gollington
Eric Gentry	Anaconda	@ericstekbytes
Romeo Kienzler	IBM (CODAIT)	@romeokienzler
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Plus one more.

Jupyter Community Call 04/26

Date: April 26, 2022, at 7am Pacific (in your [timezone](#))

Discourse

YouTube recording

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make short announcements (without a need for discussion).

- **Sarah** Shout out to everyone who is here for handling time zones!

Agenda Items

- **JupyterLab-LaTeX UX improvements PR** Result of 2 semesters of work by [Junior Design Capstone class](#) team from Georgia Tech done for client (Axle Informatics/NIH). Project included a user reasearch section which is summarized in PR. New features highlights:
 - Preview button
 - Formatting buttons (bold, italic, underlined, subscript, superscript)
 - Autocomplete for common LaTeX tags (i.e. `\subsection`)
 - tikzplots templates
 - Table creation helper
 - Suggestion: UX to help with LaTeX install discovery, errors (even as documentation)
- **JupyterLab-Git usability improvements** 4 features added to [JupyterLab-Git](#) as a result of the [12-week Spring 2022 MLH Fellowship Open-Source Program](#). The majority of the work was done by [Dat Quach](#) and [Zeshan Fayyaz](#) with help and feedback from [Frédéric Collonval](#).
 - [Credential cache](#): save Git login credentials temporarily
 - [Commit diff](#): compare two arbitrary commits in the *History* panel
 - [Reset to remote](#): force reset a branch to match its remote tracking branch
 - [A warning for unsaved staged files](#): warn the user when there are unsaved changes on files that are in the staged area
- **Frederic**
 - [Search and Replace across files](#) extension (release in the coming week)
 - [GitHub repository](#)
 - Demo
 - * The extension is using a CLI tool called [Ripgrep](#)
 - * This limits the usage of the extension to contents served from a file system.
 - Potential solutions for building index for other needs (like non OS filesystem) (thanks to Nick):
 - * <https://whoosh.readthedocs.io/en/latest/intro.html>
 - * <https://pypi.org/project/lunr/>
- **Gayle** - Jupyter Community Events Manager
 - 4th Round of CFP for Jupyter Community Workshop
 - Starting interviews for highlighted contributor write up in blog. If interested schedule time on calendar: <https://calendly.com/gayle-numfocus/30min?month=2022-04>
- **Steve**
 - New [cookiecutter](#) template for creating Jupyter Server Extensions
 - We created it during the weekly Jupyter Server [contributing hour](#)
- **Jason W**
 - Shout out for triage meetings! (Can be found on the [Jupyter Community Calendar](#))
 - Typically at 10:00 PDT, though not this week
 - You can triage on your own: [JupyterLab issues needing triage](#)

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [\[lyx\]https://www.lyx.org/](https://www.lyx.org/)
- <https://github.com/BurntSushi/ripgrep>
- <https://whoosh.readthedocs.io/en/latest/intro.html>
- <https://pypi.org/project/lunr/>

Attendees

Name	Institution	GitHub Handle
Konstantin	Axle Informatics/NIH	@ktaletsk
Dat Quach	Major League Hacking (MLH)	@quachtridat
Jason Weill	AWS	@jweill-aws
Sarah Gibson	2i2c	@sgibson91
A. T. Darian	QuantStack	@afshin
Gayle Ollington	NumFOCUS	@gollington
Frederic Collonval	QuantStack	@fcollonval
Alex Bozarth	IBM	@ajbozarth
Steven Silvester	MongoDB	@blink1073
Chris Sewell	EPFL	@chrisjsewell
Wayne Decatur	Upstate Medical Univ.	@fomightez
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Plus 1 more.

March 29, 2022

Date: March 29, 2022, at 8am Pacific (your [timezone](#))

Discourse

There is no recording for this call.

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make short announcements (without a need for discussion).

- **Zach** [voila-gridstack](#) is great and Zach can't wait for a release on PyPI sometime soon!
 - [voila-dashboards/voila #846](#) Switch to a lab-based app for the Voila frontend

Agenda Items

With time changes, this meeting was accidentally double-booked with the Jupyter Security meeting! Since we had an open agenda before the community call, our notes overlap with theirs.

For notes from this call, please refer to the [March 29, 2022 jupyter/security meeting notes!](#)

February 22, 2022

Date: February 22, 2022, at 8am Pacific (your [timezone](#))

Discourse

YouTube link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make short announcements (without a need for discussion).

- **Isabela:** Jupyter accessibility workshops are coming up in March. [Sign up for the March 12 event](#). [Sign up for the March 19 event](#).
- **Tony:** We now have Jupyter triage meetings (on Thursdays). Find them on the [community calendar](#)
- **Nick:** [flit 3.7.0](#) released, supports `data_files` for kernelspecs, extensions, etc.

- **@jasongrout:** We are releasing RC prereleases of ipywidgets 8.0 and 7.7 very soon. Will announce on [Jupyter Discourse](#) when it happens.

Agenda Items

- **Ana Ruvalcaba/Gayle Ollington** Introduction and welcome to Gayle, Community Events Manager for Project Jupyter.
 - [Jupyter Community Building Committee Charter](#)
 - [December 2021 Jupyter Community Update](#)
- **Frederic Collonval:** WIP [Jupyter styled components](#) to speed up your dev. Come as web components or React components and are ARIA compliant thanks to the underlying [FAST Framework](#).
Related [JEP pre-proposal](#)
 - Question: will these be eventually used for ipywidgets? Answer: There hasn't been a discussion yet, but it is possible to make a new library (like the ones for Vue and Angular)
- **Jeremy Tuloup, Nicholas Bollweg** [An embeddable REPL powered by JupyterLite](#), various updates (cache busting, slimer app, Pyodide 0.19)
- **Tasko Olevski, Andreas Bleuler** [Amalthea](#) - A Kubernetes operator for Jupyter Servers. Short introduction to the project and its goals. [Link to presentation](#)

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- Today's date is an anagram! [a 22-02-2022 tweet](#)
- [CarpenPi project](#)
- [mamba-org/quetz-frontend repository](#)
- [ipydrawio in JupyterLite](#)
- [tangle examples notebook in JupyterLite](#)
- [Renku](#)

Attendees

Name	Institution	GitHub Handle
Jason Grout	Databricks	@jasongrout
Frederic Collonval	QuantStack	@fcollonval
Sarah Gibson	2i2c	@sgibson91
David Brochart	QuantStack	@davidbrochart
Nick Bollweg	Georgia Tech	@bollwyvl @nrbgt
Simon Li	University of Dundee	@manics
tonyfast	quansight	@tonyfast
Tasko Olevski	SDSC / ETH Zürich	@olevski
Jeremy Tuloup	QuantStack	@jtpio
Simon Adorf	EPFL	@csadorf
Andreas Bleuler	SDSC / ETH Zürich	@ableuler
Zach Sailer	Apple	@Zsailer
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf
Ana Ruvalcaba	California Polytechnic State University	@Ruv7
Gayle Ollington	NumFOCUS	

Plus 6 more

January 25, 2022

Date: January 25, 2022, at 8am Pacific (your [timezone](#))

[Discourse](#)

[YouTube link](#)

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make short announcements (without a need for discussion).

- Zach has a shout out! Hooray for these calls continuing into 2022!
- Tony: congrats to the team who made the first two Jupyter accessibility workshops happen in the last two weeks
- Steve: Shout out to Zach for being an early adopter of the new Jupyter governance process with jupyter-server!
- Tony: Shout out to Darian for sharing the Jupyter governance process changes with the whole community
- Tony: Great work to the Binder team for keeping Binder ready to go for the world.
- Tony: Thanks to everyone attending for keeping community calls running
- Zach: Cool demo on Twitter of MyST in a Jupyter notebook (this is later on the agenda)

Agenda Items

- **MLflow Kernel Demo** by Jitendra Pandey (jitendra@infinstor.com). MLflow Kernel connects to an MLflow service and records all the data science activities in the Jupyter notebook as MLflow artifacts. It is open source at [infinstor/mlflow-kernel](#) and [Infinstor quickstart: mlflow kernel](#)
- Demonstrations of [Jupyter cache](#), [JupyterLab MyST](#) (and maybe [PR to rewrite myst-nb](#))

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [rst-to-myst](#)

Attendees

Name	Institution	GitHub Handle
jitendra	InfinStor	InfinStor
Frederic Collonval	QuantStack	@fcollonval
Chris Sewell	EPFL/EBP	@chrissewell
Sarah Gibson	2i2c	@sgibson91
Simon Li	University of Dundee	@manics
Rollin Thomas	NERSC	@rcthomas
Zach Sailer	Apple	@Zsailer
Adhitya Vadivel	InfinStor	@adhityav
Gabriel Fouasnon	Quansight	@gabalafo
Wayne Decatur	Upstate Medical University	@fomightez
tony fast	Quansight	@tonyfast
A. T. Darian	Two Sigma	@afshin
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Plus 6 more

November 30, 2021

Date: November 30, 2021, at 8am Pacific (your timezone)

Discourse

YouTube link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make short announcements (without a need for discussion).

- **@loichuder:** Release 1.0.0 of [jupyterlab-h5web](#) bringing support for JLab3 as prebuilt extension
- **@bollwyvl** [jupyterlite 0.1.0a17](#) speaks self-hosted/custom wheels and MathJax
 - [offline pyodide](#) coming
 - * [jupyter-server-proxy 3.2.0](#) including full control of request re-writing, sub-paths in Lab launchers

Agenda Items

- **@ltetrel** [jupyter book workflow on NeuroLibre](#)
 - [NeuroLibre Documentation](#) (you are welcome to be an alpha tester!))
 - This is the [pull request for initContainer on binderhub](#). It should be already possible with [Zero to Jupyter-Hub singleuser.initContainers](#) but not optimal (better to do our process once during build). The missing piece is to give that `initContainer` an environment variable (as discussed on the [github issue](#) and [Jupyter discourse](#)).

- **@fcollonval** [WIP RISE in JupyterLab PR](#)

To test the PR locally, here are the commands to execute:

```
yarn
yarn build
python3 -m pip install -e .
jupyter server extension enable --sys-prefix rise
jupyter serverextension enable --sys-prefix rise
jupyter labextension develop --overwrite .
```

- **@afshin** [DRAFT] [Jupyter Enhancement Proposal \(JEP\) for Jupyter Notebook version 7](#)

- Also mentioned on the [Jupyter Discourse](#)

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [The Journal of Open Source Software](#)
- [Comment on Jupyter Discourse post Feature Idea: JupyterHub/BinderHub + Jupyter Book as a publishing platform](#)
- [Darian's sweet potato pie recipe](#)
- [Cooking for Engineers](#)
- [jupyterlab/jupyterlab issue #10207 Side-by-side rendering](#)

Comments

- Gabriel: being able to draw on the slides in Frederic's demo (over the figures, charts) looked very cool to me

Attendees

Name	Institution	GitHub Handle
loic tetrel	SIMEXP (UDEM)	@ltetrel
jeremy ravenel	Naas	@jupyter-naas
Frederic Collonval	QuantStack	@fcollonval
Afshin T. Darian	Two Sigma	@afshin
Zach Sailer	Apple	@Zsailer
Sarah Gibson	2i2c	@sgibson91
Martha Cryan	IBM	@marthacryan
Karla Spuldaro	IBM	@karlaspuldaro
Jessica Xu		@jess-x
Nick Bollweg	Georgia Tech	@bollwyvl @nrbgt
Wayne Decatur	Upstate Medical Univ.	@fomightez
Dane Freeman	Georgia Tech	@dfreeman06
Gabriel Fouasnon	Quansight Labs	@gabalafou
Rollin Thomas	NERSC	@rcthomas
Loic Huder	ESRF	@loichuder
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Plus 6 more

October 26, 2021

Date: October 26, 2021, at 8am Pacific (your [timezone](#))

[Discourse](#)

[YouTube link](#)

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- **Carol** Thank you Zach for getting discussion started about [Classic notebook and maintainer issues on GitHub](#). :heart:
- **Rollin** Reminder that Jupyter security calls are on every other Friday ([see community calendar](#))
- **Many people** Thank you Darian for years of sustained effort on improving governance!

Agenda Items

- **Rollin** Jupyter security group overview and updates
- **Chris** [Executable book project](#) updates
- **Simon** [BinderHub](#) updates
- **Tony** exploring a 7-year old notebook
- **Zach** exploring an 8-year old notebook
- **Darian and Fernando** Update on governance refactor - parts that are now active or coming.
 - Relevant PR [jupyter/governance #103](#)
 - [Slides](#)

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [jupyterlab/jupyterlab #11079 Settings UI PR](#)
- [myst](#)
- [The Executable Book Project gallery](#)
- [Sphinx autoapi](#)
- [2i2c](#)
- [San Diego Python Intro to Python](#)
- [Carol's Journey to Jupyter slides](#)
- [papyri](#)
- [Carol's JupyterHub "A Thing Explainer" slides](#)
- https://abigayle-mercier.github.io/Jupyter/CH_3-1.html
- [Jupyter governance office hours on the Jupyter Discourse](#)
- [Notebook Hall of Fame](#)

Attendees

Name	Institution	GitHub Handle
Fernando Pérez	UC Berkeley, Jupyter	fperez
Simon Li	University of Dundee	@manics
Rollin Thomas	NERSC	@rcthomas
Carol Willing	Noteable	@willingc
Gabriel Fouasnon	Quansight Labs	gabalafou
Alex Bozarth	IBM	@ajbozarth
Karla Spuldaro	IBM	@karlaspuldaro
Chris Sewell	Executablebooks	@chrisjsewell
Jared Thompson	Comcast	@afonit
Loic Huder	ESRF	@loichuder
tonyfast	quansight	@tonyfast
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Plus 4 more

September 28, 2021

Date: September 28, 2021, at 8am Pacific (your [timezone](#))

Discourse

YouTube link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#).

- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- **Loïc** Extensions for HDF5 files
 - Release 1.0.0 for [jupyterlab-hdf5](#) bringing support for JupyterLab 3
 - * :thumbsup: Thank You!!!
 - Release 0.10.0 for [jupyterlab-h5web](#) removing big files limitation

Agenda Items

- **Angus** would like to introduce the prototype [jupyterlab-imerkdown](#) and discuss its wider implications.
- **Rollin** would like to share Jupyter security documentation review from Trusted CI
 - The review doc from Kay Avila at Trusted CI: <https://bit.ly/3ED0zbN>
 - <https://discourse.jupyter.org/t/jupyter-security-related-documentation/10921>
 - Will be discussed at next few security meetings (every other Friday, see the [Jupyter calendar](#) for event)
 - (Background: <https://blog.jupyter.org/trusted-ci-cybersecurity-engagement-with-jupyter-859a5f5d7201>)
- **Rick** would like to introduce a new extension and get feedback
- **Theodore** looking for links for good jupyter lab widgets dev tutorials and examples

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- <https://kidpix.app/>

Attendees

Name	Institution	GitHub Handle
Angus Hollands	U Birmingham	@agoose77
Rick McGeer	engageLively	@rickmcgeer
Chris Sewell	EPFL / EBP	@chrisjsewell
Sarah Gibson	2i2c	@sgibson91
Simon Li	University of Dundee	@manics
Rollin Thomas	NERSC	@rcthomas
Wayne Decatur	Upstate Medical University	@fomightez
Karla Spuldaro	IBM	@karlaspuldaro
Joyce Er	Microsoft	@joyceerhl
Pete Blois	Google	@blois
Tony Fast	Quansight	@tonyfast
Alex Bozarth	IBM	@ajbozarth
Theodore Aptekarev		@piiq
Loïc Huder	ESRF	@loichuder
Luciano Resende	IBM	@lresende
Jessica Xu	Quansight	@jess-x
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Plus 5 others.

August 31, 2021

Date: August 31, 2021, at 8am Pacific (your timezone)

Discourse

YouTube link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- **Rollin** JupyterHub + HPC meeting tomorrow [agenda](#), invite/link on the [community calendar](#)
- **Rollin+Rick** Jupyter Security Meetings, biweekly (Fridays, 9:00 AM PDT)
 - Next call Sep 10
 - Trusted CI Jupyter security docs review
- **Mike**: Translations for JupyterLab
 - If you want to contribute translation is happening on <https://crowdin.com/project/jupyterlab>

Agenda Items

- **Navinn** would like to present the work done by the [MLH Fellowship](#) on the JupyterLab Git Extension.
- **Mike** will introduce early version of [JupyterLab citation manager extension](#)
- **David** would like to present the latest development in [akernel](#): reactivity.
- **Tony** would like to share [jupyterlab-markup](#) and [pidgy](#).

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [Voila on hackernews!](#)
- Some updates on JupyterLab translation based on new strings. Join us in translating on [crowdin!](#)

Attendees

Name	Institution	GitHub Handle
Frederic Collonval	QuantStack	@fcollonval
David Brochart	QuantStack	@davidbrochart
Thorin Tabor	UCSD	@tmtabor
Rick Wagner	UCSD	@rpwagner
Hamilton Ulmer	Mozilla	@hamilton
Rollin Thomas	NERSC	@rcthomas
Navinn Ravindaran	MLH Fellowship	@navn-r
Luciano Resende	IBM	@lresende
Nick Bollweg	Georgia Tech	@bollwyvl @nrbgt
Loïc Huder	ESRF	@loichuder
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf
Michał Krassowski	U Oxford	@krassowski
Jessica Xu	Quansight	@jess-x

Plus 7 others.

July 27, 2021

Date: July 27, 2021, at 8am Pacific (your timezone)

Discourse

YouTube Link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- **Michael Milligan** For cluster/scheduler users, [batchspawner](#) and related [wrapspawner](#) had new releases recently
- **Steve** JupyterLab 3.1 release
- **Rick** Globus Groups support in OAuthenticator
- **Simon** mybinder.org no longer blocking public cloud requests (Resolves [this issue](#).)
- **Nick** [jupyter-videochat](#) 0.6.0 release is coming up, adds support for JupyterLite and RetroLab (needs config :blush:)
- **Nick** [jupyterlite 0.1.0a6](#) is out, with some improved support for python kernel parity and deploying in-development lab extensions

Agenda Items

- **Matthias** would like to talk about kernel management and parametrisation.
 - You can have a look at [prototype/in progress repo](#) – in need of a better name
 - I'll point out the work of [Eric Charles](#) and [Kevin Bates](#) as well.
- **Matthias** For cluster/scheduler user, show [inplace_restarter](#).,
- **Rick & Rollin** discuss Jupyter Security Best Practices Community Workshop [old thread](#) and [new thread](#)
 - **Matthias** Better process for CVE. We'll have two soon. How do we coordinate release, response and co.
- **David** would like to present a new [asynchronous Python Jupyter kernel](#).

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- <https://github.com/deathbeds/hourhaus> - beefy binder with rtc and jupyter-videochat
- Textual
- Jupyter community calendar
- Enarx
- NSF Secure and Trustworthy Cyberspace
- Jupyter Security Best Practices Workshop (2019)
- Jupyter Security Workshop Progress 2021
- Google Bug Hunters
- Eager Award
- ipydrawio
- Exploring and defining UX expectations for a RTC enabled multi-user environment (like JupyterHub)
- rtc in jupyterlite
- hedgedoc vs yjs (hackmd is the SaaS hedgedoc)

Attendees

If you are joining the Jupyter Community Call, sign in below so we know who was here.

Name	Institution	GitHub Handle
Matthias	Quansight/Jupyter	@Carreau
Thorin	UCSD	@tmtabor
Anton	TU Delft	@akhmerov
David	QuantStack	@davidbrochart
Michael	University of Minnesota	@mbmilligan
Rick	UCSD	@rpwagner
Nick	Georgia Tech	@nrbg @bollwyl
Wayne Decatur	Upstate Medical University	@fomightez
Simon Li	University of Dundee	@manics
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf
Tony Fast	Quansight	@tonyfast

Plus 9 others

June 29, 2021

Date: June 29, 2021, at 8am Pacific (your [timezone](#))

Discourse

Youtube Link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- **Frederic**
 - Plotly v5 is out (actually v5.1 has been released yesterday): update to [plotly.js v2](#), federated extension, single extension, lazy load plotly.js - [full changelog](#).
 - JupyterLab v3.1 beta 0
- **Isabela** [Scipy Tools Plenary session at SciPy 2021 discussion](#) is still available for potential project updates.
- **Nick (or Jeremy :heart:)** [jupyterlite 0.1.0a1](#) is up on [PyPI](#) for building your own sites with a [doit](#)-powered [CLI](#). Works with many [ipywidgets](#), including [plotly 5.x](#)
- **Kevin** [Kernel Provisioning](#) pull request in [jupyter_client](#) is ready for review
- **Loïc** [jupyterlab-h5web 0.0.8](#) release landing this week bringing support of [HDF5](#) external link and compression
- **Nick (or Mike :heart:)** [JEP-72: LSP integration](#) is in PR
- **Matt Seal** [nbconvert 6.1.0](#) was released last week. [Proposal: Transmit Cell Metadata #70](#)

Agenda Items

- **Eduardo Blancas** Short introduction to [Ploomber](#), an open-source library to build data pipelines with Jupyter
- **:bird:** [pidgy](#) demo

Other Links Shared

- <http://worrydream.com/Tangle/>
- <https://dagster.io/>
- https://github.com/deathbeds/XlbsOSh_t
- <https://mybinder.org/v2/gh/deathbeds/pidgy/new-parser>
- <https://twitter.com/CarlosHerreroB/status/1409616391527931906>

Attendees

Name	Institution	GitHub Handle
Frederic Collonval	QuantStack	@fcollonval
Eduardo Blancas	Ploomber	@edublancas
Nick Bollweg	Georgia Tech	@bollwyvl @nrbgt
Paige Bailey	Microsoft	@dynamicwebpaige
Steven Silvester	Apple	@blink1073
Hamilton Ulmer	Mozilla	@hamilton
Carol Willing	Jupyter, Noteable	@willingc
Matthew Seal	Noteable	@mseal
Claudia Regio	Microsoft	@claudiaregio
Ian Huff	Microsoft	
Alex Bozarth	IBM	@ajbozarth
Ryan Spencer	Georgia Tech	@ryspnc
Loic Huder	ESRF	@loichuder
A. T. Darian	Two Sigma	@afshin
Wayne Decatur	Upstate Medical	@fomightez
Michał Krassowski		@krassowski
Luciano Resende	IBM	@lresende
Kiersten Stokes	IBM	@kiersten-stokes
Tony Fast	Quansight	@tonyfast
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

May 25, 2021

Date: May 25, 2021, at 8am Pacific (your timezone)

Discourse YouTube Link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- **Darian** Congratulations to the [2020 cohort of Jupyter Distinguished Contributors!](#)
- **Nick** [ipydrawio 1.1.0](#) just dropped: now has the sketch theme, a *Custom Diagram...* Launcher which offers all of the (extensible) templates. Also [docs](#).
- **Steve** [JupyterLab 3.1.0a9](#) is now available with Real Time Collaboration (RTC)! To use:
 - Install
 - * `pip install -U --pre jupyterlab` or
 - * `conda install -c conda-forge -c conda-forge/label/jupyterlab_alpha jupyterlab=3.1.0a9`
 - Usage
 - * `jupyter lab --collaborative` or
 - * Jupyter settings: `{"LabApp": {"collaborative": true, "expose_app_in_browser": true}}`
- **Isabela** Congratulations to all the community members who submitted CZI grant proposals last week! Thank you for your hard work.

Agenda Items

- **Tony Fast** Searching notebooks
- RTC Demo with Live Binder (temporary link given in Zoom Chat, based on [Michał's example](#)). There is a “Share” top level menu item you can use to create the shareable link.
- **Nick** Learning with flashcards about... stuff?

Other Links Shared

- <https://github.com/jupyterlab/jupyterlab/blob/master/binder/start>
- <https://github.com/davidbrochart/jupyterlab-auth>
- <https://github.com/jtpio/jupyterlite/pull/89>
- <https://github.com/gt-coar/janki>

Attendees

Institution	Name	GitHub Handle
University of Southern California	Dhrithi Deshpande	@dhrithideshpande
Openteams	Eskild Eriksen	@iameskild
Two Sigma	Afshin T. Darian	@afshin
Georgia Tech	Nick Bollweg	@bollwyvl
Microsoft	Joyce Er	@joyceerhl
Microsoft	Claudia Regio	@claudiaregio
Microsoft	Paige Bailey	@dynamicwebpaige
UCSD	Thorin Tabor	@tmtabor
Alan Turing Institute	Sarah Gibson	@sgibson91
QuantStack	Frederic Collonval	@fcollonval
Quansight	Mars Lee	@marsbarlee
Jupyter/Noteable	Carol Willing	@willingc
QuantStack	Jeremy Tuloup	@jtpio
QuantStack	David Brochart	@davidbrochart
Apple	Steven Silvester	@blink1073
Apple	Zach Sailer	@Zsailer
Quansight	Tony Fast	@tonyfast
Quansight Labs	Isabela Presedo-Floyd	@isabela-pf
uPlanner	Sebastian Flores	@sebastiandres

April 27, 2021

Date: April 27, 2021, at 8am Pacific (your timezone)

Discourse:

Youtube Link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- **Loïc Huder** New release of [jupyterlab-h5web](#) that brings HDF5 file exploration and visualization to the notebook.
- **Isabela Presedo-Floyd** As always, if anyone is interested in hosting, co-hosting, or getting involved with planning a community call, please reach out to me.

Agenda Items

- **Jeremy:**
 - [JupyterLite](#), a JupyterLab distribution that runs entirely in the browser
 - Many thanks to Nick!
 - Try it online: https://jupyterlite.readthedocs.io/en/latest/_static/lab/index.html
- **Gonzalo** Internationalization workflow for extension developers
 - Some feedback... :man-facepalming:
 - * “As I see, there is a delay with the creation and publishing of language packs. We use Jupyter Lab as a base for one of our products and we are interested in using language lacks in it (especially Chinese and Japanese. What is the reason for the delay and is it possible to help the project somehow? We are interested in contributing to the Jupyter Lab project in many domains, for example, software development, testing and translation.”
 - Releasing language packages :world_map::card_file_box:

Language	People	Progress
 Spanish QA	36	<div style="width: 100%; height: 10px; background-color: blue;"></div>
 Chinese Simplified QA	33	<div style="width: 100%; height: 10px; background-color: blue;"></div>
 Hebrew QA	15	<div style="width: 100%; height: 10px; background-color: blue;"></div>
 Turkish QA	108	<div style="width: 100%; height: 10px; background-color: blue;"></div>
 Portuguese, Brazilian QA	32	<div style="width: 100%; height: 10px; background-color: green;"></div>
 Ukrainian QA	21	<div style="width: 100%; height: 10px; background-color: blue;"></div>
 Japanese QA	21	<div style="width: 100%; height: 10px; background-color: blue;"></div>
 French	28	<div style="width: 100%; height: 10px; background-color: green;"></div>
 Russian QA	23	<div style="width: 100%; height: 10px; background-color: blue;"></div>
 Polish QA	19	<div style="width: 100%; height: 10px; background-color: blue;"></div>


- * Current packages and state (showing first 10)
- * Releasing Spanish and Chinese simplified today evening. :eyes:
- * Please attend the JLab dev meeting for more information on the internal process for managing the translations and language packs.
- Resources :books:
 1. [Example PR to internationalize your extension adding internationalization to Jupyterlab-Git extension.](#)
 2. [Yaml File to update on the language packs centralized repo to update on the language packs repository.](#)
 3. [Language packs repository.](#)
 4. [Start translating on Crowdin](#)

5. JupyterCON slides - [Video]

- **David:**

- **Nbterm**

- * [Blog: Jupyter Notebooks in the terminal](#)

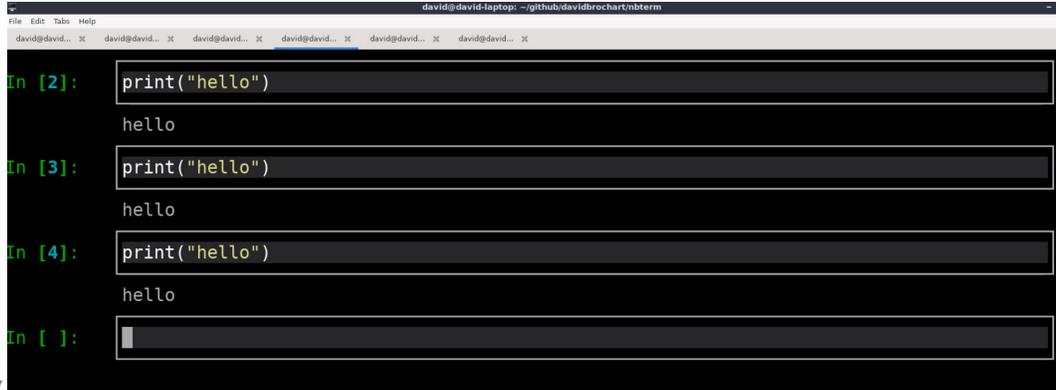

```
File Edit Tabs Help
david@david-laptop: ~/github/davidbrochart/nbterm
david@david... X david@david... X david@david... X david@david... X david@david... X david@david... X
In [2]: print("hello")
hello
In [3]: print("hello")
hello
In [4]: print("hello")
hello
In [ ]:
```

- * [Github Repository](#)

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- <https://github.com/jupyterlab/jupyterlab-hdf5>
- <https://github.com/jtpio/jupyterlite/issues/41>
- <https://deathbeds.github.io/jyve/lab/>
- <https://github.com/capytale/capytale>

Attendees

Name	Institution	GitHub Handle
A. T. Darian	Two Sigma	@afshin
Layne Sadler	AIQC	@aiqc
Sylvain Corlay	QuantStack	@SylvainCorlay
Loïc Huder	ESRF	@loichuder
Claudia Regio	@Microsoft	@claudiaregio
Joyce Er	@Microsoft	@joyceerhl
Jeremy Tuloup	@QuantStack	@jtpio
Steven Silvester	@Apple	@blink1073
Zach Sailer	@Apple	@Zsailer
Gonzalo Peña-C.	@Quansight	@goanpeca
Damián Avila	MADS & 2i2c	@damianavila
Pete Blois	Google	@blois
Marvin Kastner	Hamburg University of Technology	@lkastner
David Brochart	QuantStack	@davidbrochart
Tony Fast	Quansight	@tonyfast
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

March 30th, 2021

Date: March 30, 2021, at 8am Pacific (your [timezone](#))

Discourse:

Youtube Link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- **Isabela Presedo-Floyd** Congrats to anyone who started the cycle 4 CZI EOSS grant application process! We have several in the community.
- **Nick B** [jupyter-starters 1.0.2](#)
- **Carol W** Darian for his work on the Jupyter Distinguished Contributors.

Agenda Items

- **Nick B.** Has anyone done `if this then that` in a JupyterHub?
 - General answer is no
 - Something like <https://github.com/huginn/huginn>?
 - For background, this is <https://ifttt.com/>
 - Use cases
- **Tony Fast** schemata library (future traits library that complies more with JSON schema than traitlets)
 - Goal of having types being able to describe themselves. This is a work in progress for IPython.
 - Creates different types of interactive notebook outputs following JSON standards that can allow them to interact with more backends.
- Favorite notebooks/binders/plugins
 - **Simon Li** Unexpected use of binder <https://github.com/jupyterhub/jupyter-remote-desktop-proxy/>
 - Can you run JupyterHub inside mybinder <https://gist.github.com/manics/cd04d42b211dfd6240430ee33349cd49>
- **Tony Fast** <https://nbviewer.jupyter.org/github/deathbeds/deathbeds.github.io/blob/master/deathbeds/2018-07-31-Testing-notebooks.ipynb>
 - https://github.com/jennalandy/notebook-research/blob/master/analysis_notebooks/16_HallOfFame.ipynb

- **Nick B.** <https://gist.github.com/bollwyvl/7a128978b8ae89ab02bbd5b84d07a4b7>
 - Can we round-trip LaTeX to SymPy <https://github.com/bollwyvl/sympy-latex-hypothesis/blob/master/Hypothesize.ipynb>
- **Carol Willing** <https://github.com/moorepants/pydy-tutorial-human-standing>

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- <https://w3c.github.io/annotation-aria/>
- <http://507movements.com/>
- <http://rescience.github.io/ten-years/>
- <https://web.mit.edu/music21/>
- <https://pocket.ai/>
- <https://www.dexterindustries.com/gopigo3/>

Attendees

Name	Institution	GitHub Handle
Frédéric Collonval	ARIADNEXT	@fcollonval
Simon Li	University of Dundee	@manics
Carol Willing	Jupyter	@willingc
Nick Bollweg	Jupyter, GaTech	@bollwyvl @nrbgt
Pierre-Olivier Simonard	Quansight	@pierrotsmnrd
Fatma Tarlaci	OpenTeams	@ftarlaci
Pete Blois	Google Colab	@blois
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

February 23rd, 2021

Date: February 23, 2021, at 9am Pacific (your [timezone](#))

Discourse:

Youtube Link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

- **Nick B:** Are you excited by... **JS license compliance**? Feedback welcome on [lab#9779](#) (screenshot)!
- **Nick B:** The latest [Lab RTC PR](#) (demo) is !
- **Isabela Presedo-Floyd:** If you are interested in helping run or host a community call, let me know (you won't have to do it alone :sunflower:):!
- **Mike:** pyls fork [python-ls](#) in cooperation with the Spyder team; preview of the changes to come in my [personal fork](#) (**fast** and more clever autocompletion for [jupyterlab-lsp!](#))
- **Matt S:** [testbook](#) had a talk at PyCascades around unittesting Jupyter Notebooks.

Agenda Items

- **Loic Huder:** short presentation of [jupyter-h5web](#), a JLab extension to explore/visualize HDF5 files
- **Jagane Sundar:** short presentation of InfinStor's free hosted Jupyterhub service (<https://infinstor.com>), a Cloud hosted free Jupyterhub - our Jupyterhub service is free, you pay for Jupyterlab instance resources consumed
- **Frédéric Collonval:** short presentation of [papermill_report](#). JupyterHub service to generate report from notebooks combining [papermill](#) and [nbconvert](#).
- **Nick B:** [demo](#) of [ipydrawio](#) (with of [@quantstack/jupyterlab-drawio](#)), the full [diagrams.net](#) UI (with all plugins, themes, shapes...) for Lab 3. Supports *.`{ipynb,drawio,png,svg}` (plus `.pdf`, sorta)

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [agenda from 1/26](#) (last time)
- [h5web](#)
 - based on same backend as other `hd5f` extension, will share more code in the future
 - * other one's based on `lumino datagrid`
 - [merged cells](#) would be awesome
 - `keras`: export [neural network weights](#) as `hdf5`, potential use case
 - `xray` community currently
 - * viewer should work for all formats
 - [drug discovery](#)
 - preventing `jlab` from sending all the data
 - * quick fix: `filetype base64` to just send a little data (custom `contentsmanager`?)
 - * would prefer basically *no* data...

- infinistor product
 - hub
 - * custom spawner/authenticator (FOSS tbd)
 - didn't want existing spawner (container/k8s)
 - vm interface granular enough
 - stoppable machines for lower idle cost
 - requires infinistor
 - aws auth
 - token refreshing
 - * hub runs on infinistor
 - * spawns in your own aws, shutdown on 15m of idle
 - * stock Lab, BYO extensions
 - * custom tool for extensions
 - snapshots
 - * dashboard
 - * s3 storage
 - * users
 - * multicloud (aws, azure)
 - * customize the python kernel?
 - in backend, have transforms, use dockerfile, modify dockerfile
 - stock open source distributions (pip, conda)
- [show and tell on discourse](#)
- papermill_report
 - speaks python (other libraries could be added)
 - install as a service on hub
 - pick notebook
 - fill out form from papermill
 - click button, get report
 - shareable url
 - if break, get full traceback
 - click to get annotated notebook report
 - next time: integration testing jupyterlab, screenshots w/ playwright, etc.
 - papermill inspect added for this purpose, first example of using in FOSS
 - multi-step wizard?
 - * schedulers
 - cylc

- dagster
- prefect
- hiding code?
 - * nbconvert (use tags?)
 - * preprocessors
 - * all standard stuff
- ipydrawio
 - nb: most important takeaway: write the mimerenderer first, then it's easier to write a wid-get/document
 - More draw.io features available in notebooks

Attendees

Name	Institution	GitHub Handle
Jagane	InfinStor, Inc.	@jagane-opensource
Loïc Huder	ESRF	@loichuder
Frédéric Collonval	ARIADNEXT	@fcollonval
Layne Sadler	AIQC	@aiqc
Nick Bollweg	GTRI, Project Jupyter	@nrbg @bollwyvl
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf
M. Krassowski (Mike)	UOxf (on own behalf)	@krassowski
Simon Li	University of Dundee	@manics
Dan Lester	Ideonate	@danlester
Wayne Decatur	Upstate University	@fomightez
Michael Milligan	MSI @ U of Minnesota	@mbmilligan
Matthew Seal	Noteable, Inc	@mseal
Jose Ferro.	EPO (www.epo.org)	@joseberlines
Marvin Kastner	Hamburg University of Technology	@lkastner
Zach Sailer	Apple	@Zsailer
A. T. Darian	Two Sigma	@afshin
W Stein	CoCalc	@williamstein
Raja Rajendran	InfinStor, Inc.	@software-artisan
Adhitya Vadivel	InfinStor, Inc.	@adhityav
Jeremy Tuloup	QuantStack	@jtpio
Steven Silvester	Apple	@blink1073
Safia Abdalla	Microsoft, nteract	@captainsafia
Shelby Sturgis	Netflix	@stormpython
Pete Blois	Google	@blois

Jupyter Community Call

January 26th, 2021

Date: January 26, 2021, at 9am Pacific (your [timezone](#))

Discourse

YouTube Link

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make short announcements (without a need for discussion).

- **Frédéric Collonval** To improve visibility and group volunteer time on maintenance of popular JupyterLab extensions, a unofficial GitHub organization has been created: [jupyterlab-contrib](#).
- **Isabela Presedo-Floyd** In case you missed it, [JupyterLab 3.0 is out!](#) Congrats to the community and thanks for all the hard work that went into this release.
- **Isabela Presedo-Floyd** I've seen a resurgence of community interest in making multiple Jupyter projects accessible. This is awesome! We also have a group of people meeting every other week to coordinate JupyterLab accessibility work (and talk about accessibility in general) that you can join from the [community calendar](#).
- **Layne Sadler** Plotly updated jupyter-dash labextension for 3.0 and vows to prebuild. [issue](#)

Agenda Items

- **Nick Bollweg** [jupyterlab-lsp 3.2](#) on [pypi](#) & [conda-forge](#). JupyterLab :three.: :eight: [Language Client](#) features. [Ju\(lia\)+Py\(thon\)+R Language Servers+Kernel+Notebook](#), plus [more](#). [Pre-JEP Issue](#) to move towards an official sub-project .
- **Nick Bollweg** (or *someone better :muscle:*) [JupyterLab 2.3.0rc0](#) is a performance-focused prerelease, on [pypi/conda-forge](#), these features will land in 3.1. Ready for [testing!](#)
- **Frédéric Collonval**: Leverage JupyterLab modularity to customize the UI with a alternative [launcher](#) and a [cell toolbar](#) - demonstrate easier distribution thanks to [JLab3](#).
- **Corentin Cadiou**: presentation of [ipysphagheti](#) (name not settled yet) a [JLab \(3+\)](#) extension implementing a node-based approach to interact with your data.
- **Thorin Tabor**: [Notebook Projects](#), a mechanism for encapsulating multiple user environments in a [JupyterHub](#) instance

Other Links Shared

- Take the [Jupyter survey!](#)
- some nteract links after @raman’s pre-demo:
 - <https://docs.nteract.io/getting-started-with-nteract/>
 - <https://github.com/nteract/nteract>
- semi-related “instant-on” compute/notebooks
 - [jyve](#), static JupyterLab build
 - [pyodide](#), full CPython in the browser
- hackmd’s FOSS flavor is now [HedgeDoc](#)
 - we need a Hub/Lab Extension :hedgehog:
- “run cells with tags”
 - from `cell-toolbar` demo
 - could this be supported in multiple clients, e.g. *JupyterLab Notebook* UI and `nbclient/nbconvert` CLI
- workflows with (some) Jupyter integration
 - `cylc`
 - `dask`
 - `dagster` (binder)
 - `openmdao`
 - `prefect`
- [GenePattern](#) and [GenePatternNotebook](#)
- [Integrative Genetics Viewer](#) and their Jupyter extension

Q/A

As a company, how do we start contributing?

- @willingc follow the projects that seem most within your team’s wheelhouse
 - Visit the Jupyter [Discourse](#) and [community calendar!](#)
- @jasongrout JupyterLab 4.0 [release plans](#) are underway. There may be items there, or things you want to contribute.
 - translations always welcome! Check [CrowdIn](#) for more info.
 - [corporate guidance](#)
 - [team compass](#) is where many of these larger discussions may happen.
- @jupyter/notebook is very starved for resources
 - has a weekly meeting just trying to keep the issue count down.
 - * many are low-touch to at least get triaged
 - really any help welcome
- @isabela-pf accessibility on all projects.

- We have been starting with JupyterLab Components, etc. Notes for our meetings and all current team work live in [this issue](#)
- And documentation in [pydata-sphinx-theme](#) (upstream of `jupyter-book`, etc.)

What would you like to see in community calls?

- Overview of JupyterLab 3

Attendees

Name	Institution	GitHub Handle
Ross Stokoe	Refinitiv	@RR11WK
Julien Hoarau	Refinitiv	@julienhoarau
Greg Olmstead	Refinitiv	@maynardflies
Josias De Lima	Refinitiv	@JoshDL
Loic Huder	ESRF	@loichuder
Thorin Tabor	UCSD	@tmtabor
Gonzalo Gasca Meza	Google	@gogasca
Frédéric Collonval	ARIADNEXT	@fcollonval
Layne Sadler	free agent	@aiqc
Corentin Cadiou	University College London	@cphyc
Nick Bollweg	Proj. Jupyter, GTRI, Deathbeds	@bollwyvl @nrbg @deathbeds
Wayne Decatur	Upstate Medical University	@fomightez
Zach Sailer	Apple	@Zsailer
Simon Li	University of Dundee	@manics
Raman Tehlan	nteract, StockGro	@ramantehlan
Pete Blois	Google Colab	@blois
Ryan Spencer	GTRI	@ryspnc
A. T. Darian	Two Sigma	@afshin
Carol Willing	Noteable / Jupyter	@willingc
Karla Spuldaro	IBM	@karlaspuldaro
Martha Cryan	IBM	@marthacryan
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Jupyter Community Call December 15th, 2020

Date: December 15, 2020, at time 9am Pacific (your [timezone](#))

[Discourse](#) [YouTube Link](#)

Please note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs, PR of the month

This is a place to make short announcements (without a need for discussion).

- **Accessibility testing for docs** - *Nick*
 - WIP PR to show a way forward to establish and maintain an accessibility roadmap for Sphinx-based documentation sites
- **jupyter-starters 0.6.0a0 released** - *Nick*
 - a tool for defining JSON Schema-based workflows in JupyterLab
- Thanks to everyone who gave feedback on last month's call! - *Isabela*
- Check out @jtp's repos for [Jupyterlab-Classic](#) and the [p5js notebook](#). I'm looking forward to sharing with students and teachers at Playfest conference in January. - *Carol*
- Jupyter survey is now live! [Read more and take the survey](#). - *Isabela*

Agenda Items

Add agenda items here **before** the meeting. We will reorganize the agenda so that it fits in the 60m meeting slot.

- **WXYZDVCS** Work-in-progress report on [wxyz.dvcs](#), a bridge from Jupyter Widgets to distributed version control - *Nick*
 - *Hopefully* released this week , [!\[Launch Binder\]](#) works though!
- Pierre's notebooks for teaching Python and data science
- [JupyterLab Classic](#) - *Jeremy*

Other Links Shared

This is a space to store links shared during community call discussions related to or separate from the agenda items.

- [deathbeds/importnb](#)
- [mwouts/jupyter](#)
- [QuantEcon MATLAB-Python-Julia Cheatsheet](#)
- [SQLite Jupyter kernel](#)
- [2i2c](#) (brought up around support for JupyterHubs in education)
- [p5 notebook example](#) (mentioned when talking about JupyterLab Classic)

Attendees

Name	Institution	GitHub Handle
Nick Bollweg	Project Jupyter, GTRI, Deathbeds	@bollwyvl @nrbg
Steven Silvester	Apple	@blink1073
Ryan Spencer	GTRI	@rypnc
Simon Li	University of Dundee	@manics
Wayne Decatur	Upstate Medical University	@fomightez
Pete Blois	Google Colab	@blois
Pierre-Olivier Simonard	Quansight	@pierrotsmrd
Ryan C. Cooper	University of Connecticut	@cooperrc
Raman Tehlan	nteract	@ramantehlan
A. T. Darian	Two Sigma	@afshin
Jeremy Tuloup	QuantStack	@jtpio
Damián Avila	UMSI-MADS	@damianavila
Tim George	Freelance	@tgeorgeux
Gonzalo Peña-Castellanos	Quansight	@goanpeca
Zach Sailer	Apple	@Zsailer
Carol Willing	Jupyter, notable	@willingc
Sarah Gibson	The Alan Turing Institute	@sgibson91
Sharan Foga	None	@sharanf
Tania Allard	–	@trallard
Tony Fast	Quansight	@tonyfast
Isabela Presedo-Floyd	Quansight Labs	@isabela-pf

Jupyter Community Call

November 17th, 2020

Date: November 17th, 2020, at 9am Pacific (your [timezone](#))

[Discourse](#)

[Youtube Link](#)

Please Note:

- Community calls are recorded and posted to this [playlist](#)
- These notes will be recorded and posted [here](#)
- Everyone present is held to the [Jupyter Code of Conduct](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make short announcements (without a need for discussion).

- **Zach** Shout out to Isabela for reviving the Jupyter Community Calls :tada:

Agenda Items

Add agenda items here **before** the meeting. We will reorganize the agenda so that it fits in the 60m meeting slot.

- IPyElk 0.2.0
 - Jupyter Widgets for interactive graphs *at scale* powered by the [Eclipse Layout Kernel \(ELK\)](#), [sprotty](#), [networkx](#).
- **dgaf** (deathbeds generalized automation framework)
- **Eric** What is a Jovyan?

Attendees

Name	Institution	GitHub Handle
Nick Bollweg	Jupyter, Deathbeds, GTRI	@bollwyvl @nrbg
tony fast		@deathbeds
Eric Charles	Datalayer, Quansight	@echarles
Isabela Presedo-Floyd	Quansight	@isabela-pf
Zach Sailer	Apple	@Zsailer
A. T. Darian	Two Sigma	@afshin

Jupyter Community Call

September 24th, 2019

Date: September 24, 2019, at 9am Pacific (your [timezone](#))

Link: [Youtube Video](#)

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make *short* announcements (without a need for discussion).

- Co-locating a Jupyter Server and Dask Scheduler *_By Matthew Rocklin* [name=tonyfast]
- Language server protocol
 - current work on jupyterlab-lsp [name=krassowski]
 - wip binder [name=bollwyvl]

Agenda Items

Add agenda items here **before** the meeting. We will reorganize the agenda so that it fits in the 60m meeting slot.

- **importing notebooks with importnb** [name=tonyfast]
importnb provides easy, flexible reuse of IPython notebooks from other notebooks, .py scripts and libraries, and even the command line.
- **RobotLab: a one-click Jupyter and Robot Framework environment** [name=bollwyvl]
RobotLab was built to support a workshop introducing acceptance-test-driven development and robot process automation with robotkernel, a Robot Framework kernel, in JupyterLab. It is built with conda, constructor and azure pipelines. You can use the installers to learn how you can use Robot Framework and Jupyter, or adapt its pipeline to produce your own, cross-platform installers
- **Project Drawdown** [name=dgentry]
Project Drawdown is a global research organization that identifies, reviews, and analyzes the most viable solutions to climate change, and shares these findings with the world. We'll show current state of climate solution models using Voila and JupyterHub, and ask for suggestions about git operation driven from the Notebook.

Attendees

- Zach | Jupyter Cal Poly | @Zsailer |
- Denton | Project Drawdown | @DentonGentry |
- Nick | GTRI | @nrbgt |
- Chico Venancio | BMC Group K. K. | @chicovenancio |
- Tony Fast | Quansight | @tonyfast |
- Wayne Decatur | Upstate Medical | @fomightez |
- Kevin Bates | IBM | @kevin-bates |
- Carol | Jupyter | @willingc |

Jupyter Community Call

August 27th, 2019

Date: August 27, 2019, at 9am Pacific (your [timezone](#))

Link: [Youtube Video](#)

Welcome!

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make *short* announcements (without a need for discussion).

- Tracking Jupyter Newsletter, [22nd edition](#). Thank you, Tony Hirst!
- JupyterLab 1.1.0rc0 is up on PyPI and conda-forge. Please test! JupyterLab 1.1.0 will be released tomorrow.
 - `pip install --pre jupyterlab==1.1.0rc0` or
 - `conda install -c conda-forge/label/prerelease-jupyterlab jupyterlab=1.1.0rc0`
- [name=yournamehere]

Agenda Items

Add agenda items here **before** the meeting. We will reorganize the agenda so that it fits in the 60m meeting slot.

- [name=Jupyter Cal Poly Intern Team] [Rich Text JupyterLab extension](#)
- [name=Jupyter Cal Poly Intern Team] [Python Package Installer JupyterLab extension](#)
- [name=Tony Fast] [Gist to Binder](#)
 - <https://gist.github.com/Zsailer/6da0dc3c97ec873685b7fe58e52d36d7>
 - People say reproducibility is hard.
 - User [mybinder.org](#) to generate a live notebook from a Gist.
 - dependencies in `requirement.txt` lead to a faster build.
- [name=Saul Shanabrook] [JupyterLab Rich Context Extensions](#)
 - [Data registry with HDF5 Viewer](#)
 - * It's meant to make it easier to create new extensions in JupyterLab that deal with different data formats. If you have a data viewer extension, you shouldn't care if the data came from a file or from a notebook output or a database, you just want to be able to render a certain format.
 - * Able to visualize HDF5 datasets using this extension too!
 - [Metadata/linked data service](#)

Attendees

If you are joining the Jupyter Community Call, sign in below so we know who was here.

- Zach | Jupyter Cal Poly | @Zsailer |
- Derek | Jupyter Cal Poly (Intern) | @dLamSlo8 |
- Isabela | Jupyter Cal Poly (Intern) | @isabela-pf |
- Marisa | Jupyter Cal Poly (Intern) | @marisaaquilina |
- Markelle | Jupyter Cal Poly (Intern) | @markellekelly |
- Javier | Jupyter Cal Poly (Intern) | @javag97 |
- Denton | Project Drawdown | @dgency |
- Tony | Quansight | @tonyfast |
- Chico Venancio | BMC Group K. K. | @chicovenancio |
- Elizabeth DuPre | McGill University | @emdupre |
- Wayne Decatur | Upstate Medical University | @fomightez |
- Saul Shanabrook | Quansight | @saulshanabrook |
- Joe | Mavenomics | @quigleyj-mavenomics |
- A. T. Darian | Two Sigma | @afshin |
- Erik Sundell | Sandvik | @consideRatio |
- Kevin Bates | IBM | @kevin-bates |

Jupyter Community Call

June 25th, 2019

Date: June 25th, 2019, at 9am PST (your [timezone](#))

Link [Youtube Video](#)

Welcome!

Purpose

Think of it as a monthly, virtual JupyterCon. It's a place to announce and share fun things happening in the Jupyter community.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make *short* announcements (without a need for discussion).

- [] [name=willingc] Congrats again to our [newest BinderHub/JupyterHub team member, Sarah](#) :tada:
- [] [name=Zsailer] Welcome the new Jupyter Cal Poly Intern team.
- [] [name=tgeorgeux] Introduction to Rich Context Work: Metadata, Data Registry, Commenting and Annotation, Real-Time Collaboration, Telemetry.
 - [Data Registry/Explorer](#)
 - [Commenting](#)
 - [Metadata](#)
 - [Telemetry](#)
- [] [name=Erik Sundell] [repo2docker](#) / MyBinder.org support for git repositories with Pipfile / Pipfile.lock coming up soon I hope ;D [repo2docker#649](#)
- [] [name=yournamehere]

Agenda Items

Add agenda items here **before** the meeting. We will reorganize the agenda so that it fits in the 60m meeting slot.

- [] [name=kbates] Brief overview of Jupyter Enterprise Gateway
 - Questions:
 - * Where can we find information to share with others?
 - [See this post](#)
 - Comments:
 - * Add talks to EG docs
 - * Check if Docker Stacks has a link to the EG docker stacks
 - * Add link to this demo to the EG docs
- [] [name=dgentry] existing system for git commit+push without requiring a forked repo? Similar to submitting homework for grading?
 - nbgrader and hubshare mentioned by Zach
 - [nbstripout](#) / [fastai-nbstripout](#) can play a part of making git merges more reasonable
 - Ask the Jupyter education community
 - * [Jupyter Education Mailing List](#)
 - Check out solutions from [Gigantum](#), a tech company started out of Johns Hopkins
- [] [name=YourNameHere]
- [] [name=YourNameHere]

Attendees

If you are joining the Jupyter Community Call, sign in below so we know who was here.

- Zach | Jupyter Cal Poly | @Zsailer |
- Erik | Sandvik | @consideRatio |
- Denton | individual | @DentonGentry |
- Tim | Jupyter Cal Poly | @tgeorgeux |
- Kevin | IBM | @kevin-bates |
- Wayne | Upstate Medical University| @Fomightez |
- Dav | Gigantum | @davclark |
- Mike Trizna | Smithsonian | @MikeTrizna |
- Anton Akhmerov | TU Delft | @akhmerov |
- Markelle | Jupyter Cal Poly ||
- Carol | Jupyter | @willingc |
- Saul | Quansight | @saulshanabrook |
- Yair | Mavenomics | @YairMarcowMavenomics|
- Joe | Mavenomics | @quigleyj-mavenomics|
- Ruixin | Microsoft | @ruixinxu |

Jupyter Community Call

May 28th, 2019

Date: 28 May 2019 at 9am PST (your *timezone*)

Link: [Youtube Video](#)

Welcome to the All-Jupyter Community Meeting

Purpose

The purpose of these monthly video conference calls is to share and demonstrate the awesome things happening in Jupyter community. We invite **anyone** to present their work, engage in discussion, or just sit in and listen. Whether you have a new [lab extension](#) you've created, a new [jupyterhub deployment](#) you're excited about, or an [nteract papermill](#) pipeline powering your business, we'd love to hear about it! And, we'll record and publish these calls on YouTube for anyone unable to attend.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make *short* announcements (without a need for discussion). This is also a great place to give shout-outs to contributors! We'll read through these at the beginning of the meeting.

- Hello from [The Turing Way](#) Book Dash :books::dash::dash: in London. This call is right at the end of a day of 18 people working together to improve the openly developed [Jupyter book](#). Our goal is to make “Reproducibility too easy not to do” (:laughing::grimacing::scream_cat:), build a strong and supportive community, and give people the knowledge and confidence they need to contribute to open source projects [name=Kirstie & Turing Way team]
 - GitHub repo: <https://github.com/alan-turing-institute/the-turing-way>
 - The book: <https://the-turing-way.netlify.com>
 - Chat room: <https://gitter.im/alan-turing-institute/the-turing-way>

Agenda Items

Add your potential agenda item here **24 hours before** the meeting at the latest. We will reorganize the agenda so that it fits in the 60m meeting slot.

- Feedback and report from Research Software Reactor Sprint [name=Sarah]
 - Event website: <https://www.microsoftevents.com/profile/form/index.cfm?PKformID=0x6927743abcd>
 - Project list: <https://github.com/research-software-reactor>
 - New binderhub in the world :baby: :confetti_ball: <https://twitter.com/gerardjgorman/status/1131097133292183553>
- Feedback and report from Jupyter Server Design and Roadmap workshop [name=Luciano]
 - sponsored by bloomberg
 - thomas, kevin, etc.
 - functionality directions, high-level roadmap
 - decouple frontend from backend: notebook, lab, nteract, voila
 - using the backend functionality, providing different UIs
 - how do we accomplish that? jupyter_server extension points
 - * ui
 - * backend
 - * handlers
 - roadmap
 - * phase 1: integrating with existing uis (notebookclassic, lab)
 - * phase 2: expand functionality
 - kernel provider pr (e.g. different kernel managers, like Enterprise Kernel Gateway)
 - * next steps:
 - pr from zak
 - blog post (illustration)
 - biweekly calls
 - * timeline:

- 6.0 release of notebook?
- post jupyterlab 1.0?
- Qt(5.6)-based PDF output from JupyterLab (0.35) Quick demo of using QtWebEngine to load a notebook in lab and make a PDF. $\$_{n+1}$ th time's the charm! | [issue](#) | [repo](#) | [\[name=Nick\]](#)

Attendees

If you are joining the All-Jupyter Community video meeting, sign in below so we know who was here. Roll call:

- | Zach | Jupyter Cal Poly | @Zsailer |
- | Amit | ReviewNB | @amit1rrr |
- | Kirstie | Alan Turing Institute | @KirstieJane |
- | Pete | Thorn | @parente |
- | Tony | Quansight | @tonyfast |
- | Nick | GTRI | @bollwyvl |
- | Luciano | IBM | @lresende |
- | Sarah | The Alan Turing Institute | @sgibson91 |
- | Saul | Quansight | @saulshanabrook |
- | James | MUN | @jmunroe |
- | Darian | Two Sigma | @afshin |
- | Matthias | UC Merced | @carreau |
- | Tania | Microsoft | @trallard |
- | Carol | Project Jupyter | @willingc |
- | Chris | UNC-Chapel Hill | @cbcunc |

All-Jupyter Community Video Call - April 2019

Date: 30 April 2019 at 9am PST (your [timezone](#))

Video-conference link: <https://calpoly.zoom.us/my/jupyter>

Welcome to the Team Meeting

Hello!

The purpose of these monthly video conference calls is to share and demonstrate the awesome things happening in Jupyter community. We invite **anyone** to present their work, engage in discussion, or just sit in and listen. Whether you have a new [lab extension](#) you've created, a new [jupyterhub deployment](#) you're excited about, or an [nteract papermill](#) pipeline powering your business, we'd love to hear about it! And, we'll record and publish these calls on YouTube for anyone unable to attend.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make *short* announcements (without a need for discussion). This is also a great place to give shout-outs to contributors! We'll read through these at the beginning of the meeting.

- [x] Shout-out to @GrahamDumpleton for continued well-researched improvements to security (e.g., <https://github.com/jupyter/docker-stacks/pull/845>) [name=Peter Parente]
- [x] Some initial work on enabling Jupyter documentation translation is happening in <https://github.com/jupyter/docker-stacks/issues/827>. If you would like to contribute a translation, review one in progress, or help document the process itself, please reach out in the issue. Thanks to @michiboo (Micky), @Nico769 (Nicola), and @Allanfs (Allan) for starting translations! [name=Peter Parente]
- [x] **Work** is being done to use BinderHub fully in AWS (hosted docker registry, ECR, and hosted git repository, CodeCommit are the current areas). [name=Chico Venancio]
- [x] JupyterLab 1.0.0a3 has been released since our last call. There are a ton of updates. One thing I specifically want to give a shout out to is the document search feature that Andrew Schlaepfer built which allows building custom search functionality for different document types. Install the new version to take it for a spin: `pip install --pre jupyterlab` [name=Darian]
- [x] RISE 5.5.0 was released, more info about the release in this blogpost: <http://damianavila.github.io/blog/posts/rise-550-is-out.html> [name=Damián]
- [x] A big shout-out to Paul Ivanov for helping organize a “Jupyter Open Studio Day” at Bloomberg in SF. Lots of great people came, shared ideas, learned, and generally celebrated open source stuff! [name=Chris H (but I won't be able to attend the meeting)]
- [x] (a few quick shout-outs from Chris) Papermill 1.0 is released! Congrats to the nteract community for releasing papermill 1.0, a tool for parametrizing / pipelining notebooks. [See the Discourse for some more links.](#) [name=Chris H (but I won't be able to attend the meeting)]
- [x] Many thanks to @KirstieJane and @betatim for improving the contributing documentation in repo2docker ([link to one PR on this](#)) [name=Chris H (but I won't be able to attend the meeting)]
- [x] IPython 7.5 out ! (mostly bugfixes) [name=Matthias, at airport so will stay muted] (Shout out to Matthias for this too!)
- [x] Matthias,Paul,Carol... are at PyCon for a tutorial (Thursday), and have Jupyter stickers ! [name=Matthias, at airport so will stay muted]
- [] add item here [name=add your name]

Agenda Items

Add your potential agenda item here **24 hours before** the meeting at the latest. We will reorganize the agenda so that it fits in the 60m meeting slot.

- [x] Updates from the nteract project [name=Safia Abdalla]
 - New release of the cross-platform nteract desktop app is out.
 - papermill v1.0 is released.
- [x] Jupyter at the University of Edinburgh, a walkthrough of the Noteable service [name=James Slack]
 - Overview of what's happening at University of Edinburgh
 - * Large support teams.
 - * Very open mindset.

- <http://open.ed.ac.uk/>
- How Jupyter came to the University
 - * Small scale adoption to start
 - * Students were installing Jupyter on university computers.
 - * Make Jupyter a shared central service.
 - * JupyterHub service university wide for use in education.
- Pilot phase of [Noteable](#).
- 6 courses with 6 different schools (~600 students).
 - * Political science, art, computer science...
- Integrated with nbgrader.
- [Jupyter Community Hackathon on NBGrader in Edinburgh](#).
- Questions and comments:
 - * Connections or interactions with Canadian group? <https://syzygy.ca> [name=Lindsey Heagy]
 - * Is this running in the cloud or university server? [name=Anton Akhmerov]
 - University server
 - * Have you explored Binderhub? [name=Chico Vernancio]
 - BinderHub now can run with “auth” and persistent storage, see <https://github.com/jupyterhub/binderhub/issues/794> for more details and a live demo (ask @betatim if you have more questions)
- [] Introducing the rewrite of [jupyter-sphinx](#) (example [here](#)) and a discussion about markup format in the notebooks (<https://github.com/jupyter/nbformat/issues/80>) [name=Anton Akhmerov]
 - Publishing documents with complex content and computed output.
- Questions/Comments: - [name=matthias (can't speak)]: I'd love to merge that with ipython built-in sphinx-ext, /(deprecate sphinx-ext potentially as it's not well maintained ([sphinx-ext docs](#)))
- [] Quantum Chemistry Database exploration with Jupyter through the [QCArchive project](#), [name=Daniel Smith].
 - The Molecular Sciences Software Institute
 - * NSF funded.
 - * Designed to serve and enhance software development efforts of broad field of computational molecular science.
 - * 8 universities represented on Board of Directors
 - * Github org: <https://github.com/MolSSI>
 - * <https://molssi.org>
 - [QCFractal](#)
 - Join our [Slack](#) to get involved.
 - Questions/comments:
 - * Is this user created content or hosted content?
 - Completely user created.
 - *

- [] May 13 & 14 W4A Hackathon on Accessibility of JupyterLab
- [] Add your item here [name=and your name]

University of Edinburgh materials and contact:

- Contact james.slack@ed.ac.uk
- Noteable - <https://noteable.edina.ac.uk/>
- Blog <https://thinking.is.ed.ac.uk/noteable/>
- nbgrader Hackathon - <http://edin.ac/2SGmzNu>
- Presentation - <https://edin.ac/2PBJc1T>

In Attendance

Name / Institution / Github Handle

- Zach / Jupyter Cal Poly / @Zsailer
- Pete / Thorn / @parente
- James Slack / University of Edinburgh / @jamesaslack
- Anton Akhmerov / TU Delft / @akhmerov
- Peter Rose / UC San Diego / @pwrose
- A. T. Darian / Two Sigma / @afshin
- Ward Harold / Google / @wkharold
- Damián Avila / / @damianavila
- Chico Venancio / BMC Group K.K. / @chicovenancio
- Eric Lesch / BMC Group K.K. / @EricLesch
- James Munroe / Memorial University of Newfoundland / @jmunroe
- Lindsey Heagy / UC Berkeley / @lheagy
- Daniel Smith / The Molecular Sciences Software Institute / @dgasmith
- Michael Milligan / U. Minnesota/MSI / @mbmilligan
- Kevin Bates / IBM / @kevin-bates
- Cindy Wu / experiment.com / @cindywu
- Joe Hamman / NCAR / @jhamman
- Nick Bollweg / GTRI / @bollwyvl
- Tom Baldwin / Cascade Data Labs / @baldwint
- Pete Blois / Google Colab / @blois
- Ana Ruvalcaba / Cal Poly, San Luis Obispo/Jupyter / @ruv7
- Tim Head / Project Binder / Zurich / @betatim
- Matthias Bussonnier / Jupyter Project / @carreau

- Tim George / Cal Poly, San Luis Obispo/Jupyter / @tgeorgeux

All-Jupyter Community Video Call - March 2019

Date: 26 March 2019 at 9am PST (your [timezome](#))

Video-conference link: <https://calpoly.zoom.us/my/jupyter>

[Link to prior meeting's virtual meeting report](#)

Welcome to the Team Meeting

Hello!

The purpose of these monthly video conference calls is to share and demonstrate the awesome things happening in Jupyter community. We invite **anyone** to present their work, engage in discussion, or just sit in and listen. Whether you have a new [lab extension](#) you've created, a new [jupyterhub deployment](#) you're excited about, or an [nteract papermill](#) pipeline powering your business, we'd love to hear about it! And, we'll record and publish these calls on YouTube for anyone unable to attend.

For more discussion on the format of these calls, see the thread [here](#).

Short reports, celebrations, shout-outs

This is a place to make *short* announcements (without a need for discussion). This is also a great place to give shout-outs to contributors! We'll read through these at the beginning of the meeting.

- [x] Shout out to Damian Avila for the second community docker stack: [umsimads/education-notebook](#) [Peter Parente, [jupyter/docker-stacks](#)]
- [x] Thank you Tony Hirst for your weekly newsletter *Tracking Jupyter* [Carol Willing, [JupyterHub](#)]
- [x] Thank you to Professor Lorena Barba at GWU for hosting the recent Jupyter team meeting [Carol Willing, [JupyterHub](#)]
- [x] Kudos, Zach Sailer et al, for kicking off the revitalization of this meeting over on the [Jupyter Discourse](#) site [Peter Parente (and everyone in attendance I suspect)]
- [x] Leave your feedback about our new all-Jupyter community call [here](#)
- [x] Come join us on the [Jupyter Discourse Forum](#)! (in case you aren't already tired of me telling you this :-))
 - <https://discourse.jupyter.org/t/introduce-yourself/17>
 - Turn off add blocker if you want to login with google or github.

Agenda Items

- Let's collect all potential agenda items here before the start of the meeting (closing time **24h before**). We will then attempt to create a coherent agenda that fits in the 60m meeting slot. If there are similar items try and group them already.
- [x] Suggested demo: [docker-stacks](#) project now posts image build manifests back to the GitHub project wiki for inspection [Peter Parente, <https://github.com/jupyter/docker-stacks/wiki>, 5 minutes]
- [x] Introduction to [mybinder.org](#), how to make a repository ready for running on [mybinder.org](#) [Tim Head, 10minutes]

- <https://mybinder.org/>
- <https://github.com/betatim/my-first-binder>
- Lots of example repositories: <https://github.com/binder-examples/>
- Not just notebooks: <https://github.com/betatim/vscode-binder>
- Documentation on how to specify dependencies and such <https://repo2docker.readthedocs.io/en/latest/>
- Questions, comments and support: <https://discourse.jupyter.org/c/questions>
- Write questions you have here:
 - * ...
 - * Is it true that you personally are the only user of <https://github.com/Carreau/open-with-binder> ?
 - * If running an event/tutorial type thing with Binder, how many users should we feel comfortable sending to MyBinder vs setting up our own Z2JH infrastructure?
 - By default it prevents more than 100 concurrent launches of the same repo. You can ask for more if you are nice.
 - fun fact: apparently the reason this launch was slow is because somebody is teaching a “learn java” course on Binder just now and a bunch of people connected all at once <https://github.com/santanche/java2learn>
 - * Show the log dashboard :P
 - sure thing: <https://grafana.mybinder.org/d/fZWsQmmz/pod-activity?refresh=1m&panelId=1&fullscreen&orgId=1>
 - * We’d love to figure out a funding model for binder
- [x] [10minutes] Update from the nteract team [Safia].
 - Version 1.0 of papermill, notebook execution and parameterization library, will be released in early April. (<https://github.com/nteract/papermill>)
 - Scrapbook, tool for extracting and assembling generated outputs and data from notebooks, known as scraps, will allow you to host scraps remotely on various cloud providers. (<https://github.com/nteract/scrapbook>)
 - Plan laid out for version 1.0 of the kernel-relay, a GraphQL API for interfacing with Jupyter kernels. (<https://github.com/nteract/kernel-relay>)
 - Effort to modularize the Data Explorer, an automatic visualization library, is underway.
 - nteract is participating in Google Summer of Code (<https://summerofcode.withgoogle.com/organizations/5447807656263680>)
 - Questions:
 - * How to learn more:
 - Nteract slack <https://slack.nteract.io/>
 - Weekly meeting on Monday Afternoon
 - * Where is the Data Explorer repo?
- [x] deathbeds stuff [Nick, github.com/deathbeds, 5min].
 - `lintotype`: interactive linting & formatting
 - `wxyz`: some crazy widgets
 - Questions:
 - * The SVG messed with my eyes. <3

- * Can you expand upon the “cell-id” things?
 - [cell id in lintotype](#)
 - [cell id in irobotframework](#)
- * Are those supposed to be extension ? Built-in ?... ?
 - ready to be packaged (not yet). Some of the stuff could go into ipywidgets
- [x] IPython releases [Matthias, IPython, <https://github.com/ipython/ipython>, 2min.]
 - Trying to do monthly release close to End Of Month.
 - 7.4 has been released ! Thanks to everyone.
 - If you want to help with 7.5 subscribe to the following issue.
 - * <https://github.com/ipython/ipython/issues/11657>
- [x] Async Kernels startup : [Matthias, Jupyter Client , https://github.com/jupyter/jupyter_client/pull/428, 4min.]
 - https://github.com/jupyter/jupyter_client/pull/428
- add item here [name, project name/url, estimated time for discussion].

Don't get limited to technical discussions !

In Attendance

Name | Institution | Github Handle

- Zach | Jupyter Cal Poly | @Zsailer
- Kyle | Netflix | @rgbkrk
- Pete | Valassis Digital | @parente
- Carol | Project Jupyter | @willingc (will miss due to OpenEdX conference)
- Brian | AWS | @ellisonbg
- Darian | Two Sigma | @afshin
- Ward | Google | @wkharold
- Tim | Project Jupyter | @betatim
- Chris | Berkeley/Project Jupyter| @choldgraf
- Pete | Google Colab | @blois
- Matthias | UC Merced | @carreau
- Saul | Quansight | @saulshanabrook
- Vidar | Simula Research | @vidartf
- Lindsey Heagy | UC Berkeley | @lheagy
- Safia Abdalla | Microsoft/nteract | @captainsafia
- Leticia Portella | - | @leportella
- Damián Avila | Project Jupyter | @damianavila
- Craig Citro | Google Colab | @craigcitro
- Nick Bollweg | GTRI | @bollwyvl

- Michael Milligan | U Minnesota / MSI | @mbmilligan
- Liang Bin Hsueh | InfuseAI | @hlb
- Thomas Vander Velde | - | @tomasdelcampo
- Luciano Resende | IBM | @lresende
- Tony Fast | Quansight | @tonyfast
- James Slack | University of Edinburgh | @jamesaslack
- Erik Sundell | Sandvik | @consideratio

3.4.2 Jupyter Community Meetings

The Jupyter community often meets (usually on-line) in order to discuss matters in the Jupyter community, share new ideas and discussions, and connect with one another. This often happens within specific sub-project (more information below), though there are also occasional community-wide meetings.

This following calendar shows the various meetings and events from Jupyter sub-projects:

Jupyter-wide meetings

All-Jupyter Community Calls generally happen on the last Tuesday of the month, and are focused around demonstrations and sharing information across all of the Jupyter projects.

- Find information on [this Discourse thread](#).
- Watch previous calls on [our YouTube channel](#).
- Read the [notes from previous calls](#).

In addition, you can find the notes from previous community meetings below.

Jupyter Project meetings

The core developers of various Jupyter sub-projects have regular meetings to discuss and demo what they have been working on, discuss future plans, and bootstrap conversation. These meetings are public and you are welcome to join remotely.

Each team has their own processes around logistics and planning for the team meetings. The following pages should help you find the information for each.

JupyterHub meetings happen monthly. For a calendar of future team meetings, see [the JupyterHub team compass repository](#).

JupyterLab meetings happen weekly. For more information about when these meetings happen, as well as notes from each meeting, see [the JupyterLab README](#).

General meeting conversation and planning often happens in the [dev-meeting-attendance Gitter channel](#). We recommend checking it periodically for new information about when meetings are happening.

3.4.3 Jupyter communications

As a general rule, most project-wide conversation happens in the [Jupyter community forum](#). There are also many other kinds of communication that happens within the community. See below for links and other relevant information.

- Community forum <https://discourse.jupyter.org/>
- Blog <https://blog.jupyter.org/>
- Newsletter <https://newsletter.jupyter.org/>
- Website <https://jupyter.org>
- Twitter <https://twitter.com/ProjectJupyter>
- Gitter <https://gitter.im/jupyter/jupyter>
- Mailing lists (Jupyter, Jupyter in Education) <https://jupyter.org/community.html>

3.4.4 Governance

- Steering council: Information about the steering council and its members can be found on the [Jupyter website](#).
- Information about Jupyter's governance process can be found on [the Jupyter governance website](#).
- Jupyter Enhancement Proposal (JEP) process: Details about the process can be found in the [enhancement proposals website](#).

3.4.5 Code of conduct

Information can be found in the [Jupyter Code of Conduct page](#).

3.4.6 Running Jupyter Events

Members of the Jupyter community often get together to share what they're working on, to work together, and to teach and learn from one another.

If you're organizing an event with the Jupyter community (whether it's as small as a JupyterDays meetup, or as large as JupyterCon) you should ensure that the event follows the values and goals of the Jupyter project - to be a place where *everyone* feels welcome and supported and that reflects the diversity of developers and users in the Jupyter community.

Shoot for having **25% of your participants come from under-represented groups**. If you're organizing a Jupyter event, here are some resources to help out.

- **Mozilla** has a number of excellent resources on hosting open events. The [Mozilla Open Events guide](#). This is an excellent resource for planning and running an open, inclusive event. In particular, [this section on making events more inviting](#) is a good way to make your event more welcoming, interesting, and accessible to the Jupyter community. Finally, the [Diversity and Inclusion wiki](#) includes [conference calls related to this topic](#).
- The [NumFocus DISCOVER cookbook](#) is another collection of resources for making your event more productive, diverse, and inclusive.
- The [National Center for Women & Information Technology](#) has an excellent collection of resources for creating a diverse and inclusive environment. In particular, we recommend their [Inclusive Environment Assessment Guide](#) and [10 actionable ways to actually increase diversity](#).
- The [PyCascades community](#) has [several efforts in improving diversity and inclusion](#).
- [Write the Docs](#) has a [Welcome Wagon Guide](#) to help first-time attendees feel welcome and included.

Ultimately, making events more inclusive is not rocket science and there is no magic bullet. It requires clear, focused dedication, planning ahead, and sustained resources and effort over time. However, we believe this effort is worth it!

3.4.7 What is a Jovyan?

You may see the word **Jovyan** used in Jupyter tools (such as the user ID in the [Jupyter Docker stacks](#) or referenced in conversations. But what is a Jovyan?

In astronomical terms, the word “Jovian” means “like Jupiter”. It describes [several planets that share Jupiter-like properties](#).

Much like the planet Jupiter and our solar system, the Jupyter community is large, distributed, and nebulous. We like to use the word **Jovyan** to describe members of this community. Jovyans are fellow open enthusiasts that use, develop, promote, teach, learn, and otherwise enjoy tools in Jupyter’s orbit. They make up the Jupyter community. If you’re not sure whether you’re a Jovyan, you probably are :-)

3.5 Contributing

3.5.1 Getting Started Contributing

Contents

- *Major Repos and Issue Types*
 - *Python*
 - *Documentation*
 - *JavaScript/TypeScript*
 - *DevOps*
 - *Web Development*

Welcome fellow contributor! We appreciate your help.

We typically label issues appropriate for new contributors as `good first issue` or `help wanted`. To start an issue, you may comment to let everyone know that you’ll be working on it. Our repos typically provide development installation instructions in each repo’s `CONTRIBUTING.md` or `README.md`. **Should you find an issue with our development installation instructions please let us know in our issues.** We want to ensure that our documentation for development installation is accurate. Additionally, other contributors are often available to answer questions about fixing the issue on the issue number or on the repo’s gitter channel.

We strive to have a inclusive, welcoming community. Please read our [code of conduct](#) to learn more.

Major Repos and Issue Types

Python

IPython, nbgrader, JupyterHub, repo2docker, and Binder are major repos written primarily in Python.

- **IPython**
 - Notable Issues
 - Development Installation
 - Gitter Channel
- **nbgrader**
 - Notable Issues
 - Development Installation
- **JupyterHub**
 - Notable Issues
 - Development Installation
 - Gitter Channel
- **repo2docker**
 - Notable Issues
 - Development Installation
 - Gitter Channel
- **Binder**
 - Notable Issues
 - Development Installation
 - Gitter Channel

Documentation

All our repos have documentation issues that are relevant for new contributors. For example, the source for the documentation you are reading right now can be found in the [jupyter/jupyter repository on GitHub](#).

JavaScript/TypeScript

Jupyter Notebook, JupyterLab, and IPyWidgets use JavaScript and TypeScript.

- **Jupyter Notebook**
 - Notable Issues
 - Development Installation
 - Gitter Channel
- **JupyterLab**
 - Notable Issues

- Development Installation
- Gitter Channel
- **IPyWidgets**
 - Notable Issues
 - Development Installation
 - Gitter Channel

DevOps

JupyterHub, repo2docker, and Binder have many issues related to devops. See the links above.

Web Development

We have issues related to the website.

- **Project Jupyter’s Website**
 - Notable Issues
 - Developer Installation

3.5.2 Developer Guide

Contents

How can I help?

Contents

- *Submitting Pull Requests*
- *Contribution Workflow*
- *Core Developer Workflow*
- *Submitting a Bug*
- *Reporting a Vulnerability*

Contributing to open source can be a nerve-wrecking process, but don’t worry everyone on the Jupyter team is dedicated to making sure that your open source experience is as fun as possible. At any time during the process described below, you can reach out to the Jupyter team on Gitter or the mailing list for assistance. If you are nervous about asking questions in public, you can also reach out to one of the Jupyter developers in private. You can use the public Gitter to find someone who has the best knowledge about the code you are working with and interact with the in a personal chat.

As you begin your open source journey, remember that it’s OK if you don’t understand something, it’s OK to make mistakes, and it’s OK to only contribute a small amount of the code necessary to fix the issue you are tackling. Any and all help is welcome and any and all people are encouraged to contribute.

Submitting Pull Requests

Individuals are welcome, and encouraged, to submit pull requests and contribute to the Jupyter source. If you are a first-time contributor looking to get involved with Jupyter, you can use the following query in a GitHub search to find beginner-friendly issues to tackle across the Jupyter codebase. This query is particularly useful because the Jupyter codebase is scattered across several repositories within the jupyter organization, as opposed to a single repository. You can click the link below to find sprint-friendly issues.

`is:issue is:open is:sprint-friendly user:jupyter`

Once you've found an issue that you are eager to solve, you can use the guide below to get started. If you experience any problems while working on the issue, leave a comment on the issue page in GitHub and someone on the core team will be able to lend you assistance.

Please keep in mind that what follows are guidelines. If you work through the steps and have questions or run into time constraints, please submit what you already have worked on as a pull request and ask questions on it. Your effort, including partial or in-progress work, is appreciated.

1. Fork the repository associated with the issue you are addressing and clone it to a local directory on your machine.
2. `cd` into the directory and create a new branch using `git checkout -b insert-branch-name-here`.

Pick a branch name that gives some insight into what the issue you are fixing is. For example, if you are updating the text that is logged out by the program when a certain error happens you might name your branch `update-error-text`.

3. Refer to the repository's README and documentation for details on configuring your system for development.
4. Identify the module or class where the code change you will make will reside and leave a comment in the file describing what issue you are trying to address.
5. Open a pull request to the repository with [WIP] appended to the front so that the core team is aware that you are actively pursuing the issue. When creating a pull request, make sure that the title clearly and concisely described what your code does. For example, we might use the title "Updated error message on ExampleException". In the body of the pull request, make sure that you include the phrase "Closes #issue-number-here", where the issue number is the issue number of the issue that you are addressing in this PR.


Feel free to open a PR as early as possible. Getting early feedback on your approach will save you time and prevent the need for an extensive refactor later.

6. Run the test suite locally in order to ensure that everything is properly configured on your system. Refer to the repository's README for information on how to run the test suite. This will typically require that you run the `nosetests` command on the commandline. Alternatively, you may submit a pull request. Our Continuous Integration system will test your code and report test results.
7. Find the test file associated with the module that you will be changing. In the test file, add some tests that outline what you expect the behavior of the change should be. If we continue with our example of updating the text that is logged on error, we might write test cases that check to see if the exception raised when you induce the error contains the appropriate string. When writing test cases, make sure that you test for the following things.
 - What is the simplest test case I can write for this issue?
 - What will happen if your code is given messy inputs?
 - What will happen if your code is given no inputs?
 - What will happen if your code is given too few inputs?
 - What will happen if your code is given too many inputs?

If you need assistance writing test cases, you can place a comment on the pull request that was opened earlier and one of the core team members will be able to help you.

8. Go back to the file that you are updating and begin adding the code for your pull request.
9. Run the test suite again to see if your changes have caused any of the test cases to pass. If any of the test cases have failed, go back to your code and make the updates necessary to have them pass.
10. Once all of your test cases have passed, commit both the test cases and the updated module and push the updates to the branch on your forked repository.
11. Once you are ready for your pull request to be reviewed, remove the [WIP] tag from the front of issue, a project reviewer will review your code for quality. You can expect the reviewer to check for the documentation provided in the changes you made, how thorough the test cases you provided are, and how efficient your code is. Your reviewer will provide feedback on your code and you will have the chance to edit your code and apply fixes.
12. Once your PR is ready to become a part of the code base, it will be merged by a member of the core team.

Contribution Workflow

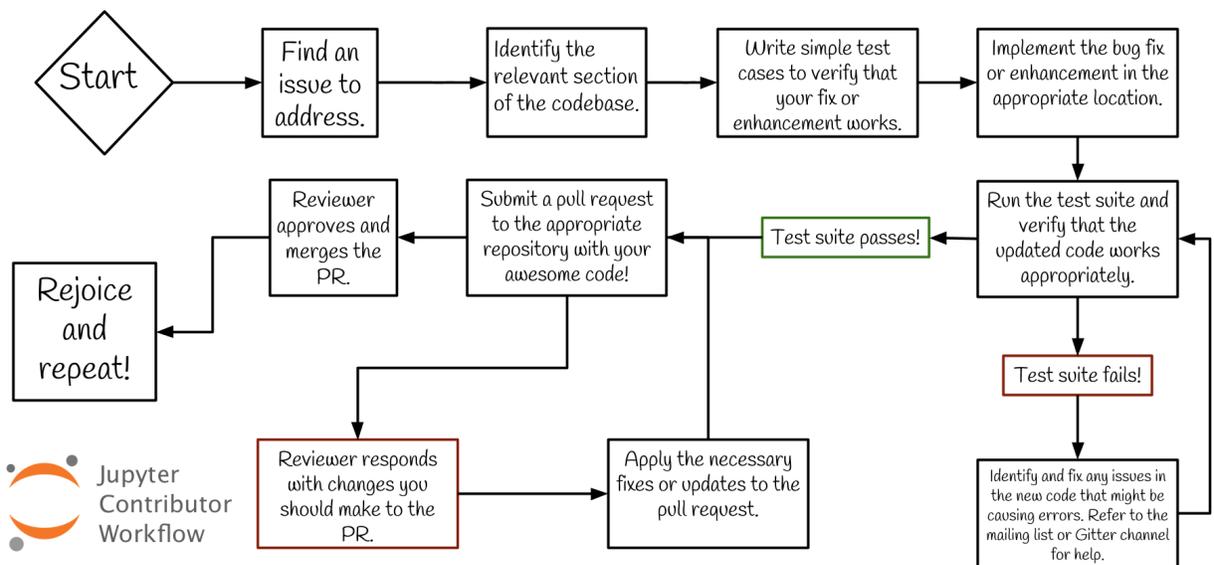

Full Contribution Workflow description.¹

¹ A flow chart with 14 labeled boxes linked by arrows. The chart is uni-directional. At each step, arrows point forward to one or more boxes and back to the previous box or boxes. Here the flow chart is described as lists in which the possible next steps are listed beneath each box label.

1. Start 1a. forward to 'Find an issue to address'
2. Find an issue to address 2a. forward to 'Identify the relevant section of the codebase'
3. Identify the relevant section of the codebase 3a. forward to 'Write simple test cases to verify that your fix or enhancement works.'
4. Write simple test cases to verify that your fix or enhancement works. 4a. forward to 'Implement the bug fix or enhancement in the appropriate location'
5. Implement the bug fix or enhancement in the appropriate location. 5a. Forward to 'Run the test suite and verify that the updated code works appropriately.'
6. Run the test suite and verify that the updated code works appropriately. 6a. forward to 'Test suit passes!' 6b. forward to 'Test suit fails!'
7. Test suit fails! 7a. forward to 'Identify and fix any issues in the new code that might be causing errors. Refer to the mailing list or Gitter channel for help.'
8. Identify and fix any issues in the new code that might be causing errors. Refer to the mailing list or Gitter channel for help. 8a. back to 'Run the test suite and verify that the updated code works appropriately'
9. Test suit passes! 9a. forward to 'Submit a pull request to the appropriate repository with your awesome code!'
10. Submit a pull request to the appropriate repository with your awesome code! 10a. forward to 'Reviewer approves and merges the PR' 10b. forward to 'Reviewer responds with changes you should make to the PR'

Core Developer Workflow

To help you understand our review process by core developers after you submit a pull request, here's a guide that outlines the general process (specifics may vary a bit across our repositories). Here is an example for Jupyter notebook 4.x:

In general, Pull Requests are against `master` unless they only affect a backport branch. If a PR affects `master` and should be backported, the general flow is:

1. mark the PR with milestone for the next backport release (4.3)
2. merge into `master`
3. backport to 4.x
4. push updated 4.x branch

Backports can be done in a variety of ways, but we have a [script](#) for automating the common process to:

1. download the patch e.g. `<https://patch-diff.githubusercontent.com/raw/jupyter/notebook/pull/1645.patch>`
2. checkout the 4.x branch
3. apply the patch
4. make a commit

which works for simple cases, at least.

In this case, it would be:

```
python /path/to/ipython-repo/tools/backport_pr.py jupyter/notebook 4.x 1645
```

11. Reviewer responds with changes you should make to the PR 11a. forward to 'Apply the necessary fixes or updates to the pull request'
12. Apply the necessary fixes or updates to the pull request' 12a. back to 'Submit a pull request to the appropriate repository with your awesome code!'
13. Reviewer approves and merges the PR' 13a. forward to 'Rejoice and repeat!'
14. 'Rejoice and repeat!'

Submitting a Bug

While using the Notebook, you might experience a bug that manifests itself in unexpected behavior. If so, we encourage you to open issues on GitHub. To make the navigating issues easier for both developers and users, we ask that you take the following steps before submitting an issue.

1. Search through StackOverflow and existing GitHub issues to ensure that the issue has not already been reported by another user. If so, provide your input on the existing issue if you think it would be valuable.
2. Prepare a small, self-contained snippet of code that will allow others to reproduce the issue that you are experiencing.
3. Prepare information about the environment that you are executing the code in, in order to aid in the debugging of the issue. You will need to provide information about the Python version, Jupyter version, operating system, and browser that you are using when submitting bugs. You can also use `pip list` or `conda list` and `grep` in order to identify the versions of the libraries that are relevant to the issue that you are submitting.
4. Prepare a simple test that outlines the expected behavior of the code or a description of the what the expected behavior should be.
5. Prepare an explanation of why the current behavior is not desired and what it should be.

Reporting a Vulnerability

If you believe you've found a security vulnerability in a Jupyter project, please report it to security@ipython.org. If you prefer to encrypt your security reports, you can use [this PGP public key](#).

Jupyter Enhancement Proposals

Submitting an Enhancement Proposal

While using the Notebook, you might discover opportunities for growth and ideas for useful new features. If so, feel free to submit an enhancement proposal. The process for submitting enhancements is as follows:

1. Identify the scope of the enhancement. Is it a change that affects only on part of the codebase? Is the enhancement, to the best of your knowledge, fairly trivial to implement? If the scope of the enhancement is small, it should be submitted as an issue in the project's repository. If the scope of your enhancement is large, it should be submitted to the official [Jupyter Enhancement Proposals repository](#).
2. Prepare a brief write-up of the problem that your enhancement will address.
3. Prepare a brief write-up of the proposed enhancement itself.
4. If the scope of your enhancement (as defined in step 1) is large, then prepare a detailed write-up of how your enhancement can be potentially implemented.
5. Identify a brief list of the pros and cons associated with implementing the enhancement that you propose.
6. Identify the individuals who might be interested in implementing the enhancement.
7. Depending on the scope of your enhancement, submit it either as an issue to the appropriate repository or as a Jupyter Enhancement Proposal.

Basic template for releasing a Jupyter project

Jupyter consists of a bunch of small projects, and a few larger ones. This lays out the basic process of releasing a smaller project, which should also apply to larger projects, though they may have some added steps.

Milestones

Most Jupyter projects use a GitHub milestone system for marking issues and pull requests in releases. Each release should have a milestone associated with it. The first step in preparing for a release is to make sure that every issue and pull request has the right milestone.

1. Go through any **open** Issues and Pull Requests marked with the current milestone. If there are any, they need to be resolved or bumped to the next milestone. It's fine to bump issues - they are typically marked with the earliest feasible milestone, but many such optimistically marked tasks aren't complete when it's time to release. There's always next time!
2. Check **closed** Issues and Pull Requests, using the milestone filter "Issues with no milestone". There should never be any closed issues or pull requests without a milestone. If you find any, go through and mark them with the current milestone or "no action" as appropriate.

A release may be ready to go when it has zero open issues or pull requests.

Release notes

Once all of the issues and pull requests are dealt with, it's time to make release notes. The smaller projects generally have a `changelog.rst` in the docs directory, where you can add a section for the new release. Look through the pull requests merged for the current milestone (this is why we use milestones), and write a short summary of the highlights of the changes in this release. There should generally be a link to the milestone itself for more details.

Make a pull request with these notes. It's a good idea to cc @willingc for review of this PR. Make sure to mark this PR with your release's milestone!

Making the release

Now that your changelog is merged, we can actually build and publish the release. We'll assume that `V` has been declared as a shell variable containing the release version:

```
export V=5.1.2
```

Start by making sure you have a clean checkout of master, with no extra files:

```
git pull
git clean -xfd
```

First, update the version of the package, often in the file `<pkg>/_version.py` or similar.

Commit that change:

```
git commit -am "release $V"
```

Note: At this point, I like to run the tests just to be sure that setting the version didn't confuse anything.

Build the distributions:

```
python setup.py sdist --formats=gztar
python setup.py bdist_wheel
```

Tag the commit:

```
git tag -am "release $V" $V
```

And finally, publish everything, to github and PyPI using [twine](#):

```
twine upload dist/*
git push origin
git push origin --tags
```

We have a release! You can now bump the version to the next ‘.dev’ version, by editing `<pkg>/_version.py` (or similar) again, and commit:

```
git commit -am "back to dev"
git push origin
```

Note: The pushes assume that `origin` points to the main jupyter/ipython repo. Depending how you use git, this could be `upstream` or something else.

Whether you are a new contributor or a seasoned developer, we’re pleased that you are working on Jupyter. We hope you find the Developer Guide is useful. Please suggest changes or ask questions about the contents. Thanks!

If you are interested in installing a specific project from source, each project has documentation on ReadTheDocs. For example, IPython documentation can be found on [ReadTheDocs](#). Most of our packages can be installed from the source directory like any other Python package, by running:

```
pip install .
```

The Jupyter notebook needs some extra pieces to build Javascript components; the information about that is in the [notebook contributor documentation](#).

3.5.3 Documentation Guide

Contents

Getting started

Contents

- *Preparing for your first contribution*
- *Developing your contribution*
 - *Clone the repository*
 - *Edit the documentation source file*
- *Testing changes*

- *Creating a pull request*
- *Asking questions*

Preparing for your first contribution

1. Our documentation uses reStructured Text, Markdown, and Jupyter notebooks.
2. We use Sphinx extensively to build documentation.
3. We use Transifex to help translate documentation to multiple languages.
4. We host our documentation on Read the Docs.

Developing your contribution

Jupyter's documentation is split across several projects, listed on the [Jupyter documentation home page](#). These instructions apply to all Jupyter projects, though some projects have further contribution guidelines.

Clone the repository

1. Fork the appropriate project repository on GitHub, depending on which project's documentation you want to contribute to.
2. Clone the repository to your system.

Edit the documentation source file

Source files for projects are typically found in the project's docs/source directory. The reStructured text filenames end with `.rst`, and Jupyter notebook files end with `.ipynb`.

1. In your favorite text editor, make desired changes to the `.rst` file when working with a reStructured text source file.
2. If a notebook file requires editing, you will need to install Jupyter notebook according to the [Installation](#) document. Then, run the Jupyter notebook and edit the desired file. Before saving the Jupyter `.ipynb` file, please clear the output cells. Save the file and test your change.

Testing changes

Sphinx should be installed to test your documentation changes. For best results, we recommend that you install the stable development version Sphinx (`pip install git+https://github.com/sphinx-doc/sphinx@stable`) or the current released version of Sphinx (`pip install sphinx`).

In addition, you may need the following packages: `sphinxcontrib-spelling`, `sphinx_rtd_theme`, `nb-sphinx`, `pyenchant`, `recommonmark 0.4.0` and `jupyter_sphinx_theme`, which can be installed via `pip install sphinxcontrib-spelling sphinx_rtd_theme nbsphinx pyenchant recommonmark==0.4.0 jupyter_sphinx_theme`.

If you are on Linux, you may also need to install the Enchant C library by running `sudo apt-get install enchant`.

Once everything is installed, the following commands should be executed using the Terminal/command line from the docs directory:

- `make html` builds a local html version of the documentation. The output message will either display errors or provide the location of the html documents. For example, the location provided may be `build/html` and to view these documents in your browser enter `open build/html/index.html`.
- `make linkcheck` will check whether the external links in the documentation are valid or if they are not longer current (i.e. cause a 500 not found error).

Note: We recommend using Python 3.4+ for building the documentation. If you are editing the documentation, you can use Python 2.7.9+ or the Github editor.

Creating a pull request

Once you are satisfied with your changes, submit a GitHub pull request, per the instructions above. If the documentation change is related to an open GitHub issue, please mention the issue number in the pull request message.

A project reviewer will look over your changes and provide feedback or merge your changes into the documentation.

Asking questions

Feel free to ask questions in the Google Group for Jupyter or on an open issue on GitHub.

Understanding our workflow

High level documentation workflow

1. Identify a documentation change.
 - *Typos*: please go ahead and fix it (or report as a bug).
 - *Open issues*: leave a note in the issue comments that you are working on the issue.
 - *New documentation*: open an issue with your idea or suggestion. We'll review the issue and work with you to identify next steps.
2. Update the source file.
3. Commit the change.
4. Test changes locally.
5. Open a pull request.
6. Check response of automated tests.
 - If tests pass: Nice job. Wait for reviewer feedback and/ or your pull request to be merged.
 - If tests show an error: Revise and resubmit your pull request. You do not need to open a new pull request. If needed, please ask for assistance.
7. Celebrate your documentation contribution.
8. Repeat. If you would like suggestions for a new documentation issue to work on, please ask.

Thanks for contributing!

Tools for documentation

Contents

- *Packages*
- *Source file formats*
- *Sphinx themes*
- *Git and Github Resources*

Packages

For user documentation, contributor guides, and communications content, we use:

- [Sphinx](#)

For developer API documentation (especially for JupyterLab js repos), we use:

- [swagger](#)

Source file formats

We use the following input source file formats when developing Sphinx documentation:

- reStructuredText (`.rst`)
- Markdown (`.md`)
- Notebook (`.ipynb`)

A modern code editor should be used. Many are available including Atom, SublimeText, gedit, vim, emacs. [Atom](#) is a good choice for new contributors.

Sphinx themes

Our projects use the following themes:

- `sphinx_rtd_theme` (currently used by Jupyter projects)
- `jupyter_sphinx_theme` (used by ipywidgets)

Git and Github Resources

If this is your first time working with Github or git, you can leverage the following resources to learn about the tools.

- [Try Git](#)
- [Github Guides](#)
- [Git Real](#)
- [Git Documentation](#)
- [Git Rebase](#)


Setting up a project's documentation infrastructure

Contents:

Structuring a repo for docs


Root level of the repo

- docs directory : All source files for documentation go here.
- readthedocs.yml : configuration file for readthedocs to build using conda

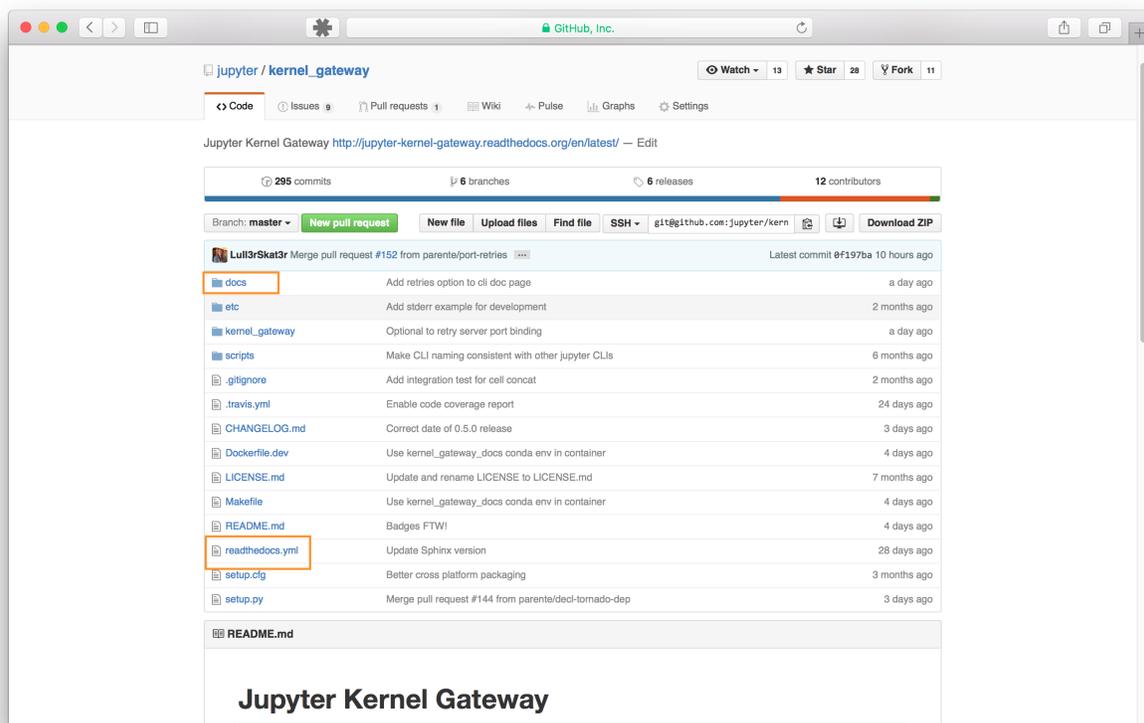

Inside the docs directory

- source directory : contains all content source files in `.rst`, `.md`, or `.ipynb`
- makefile : used by Sphinx to build the docs
- environment.yml : conda build instructions

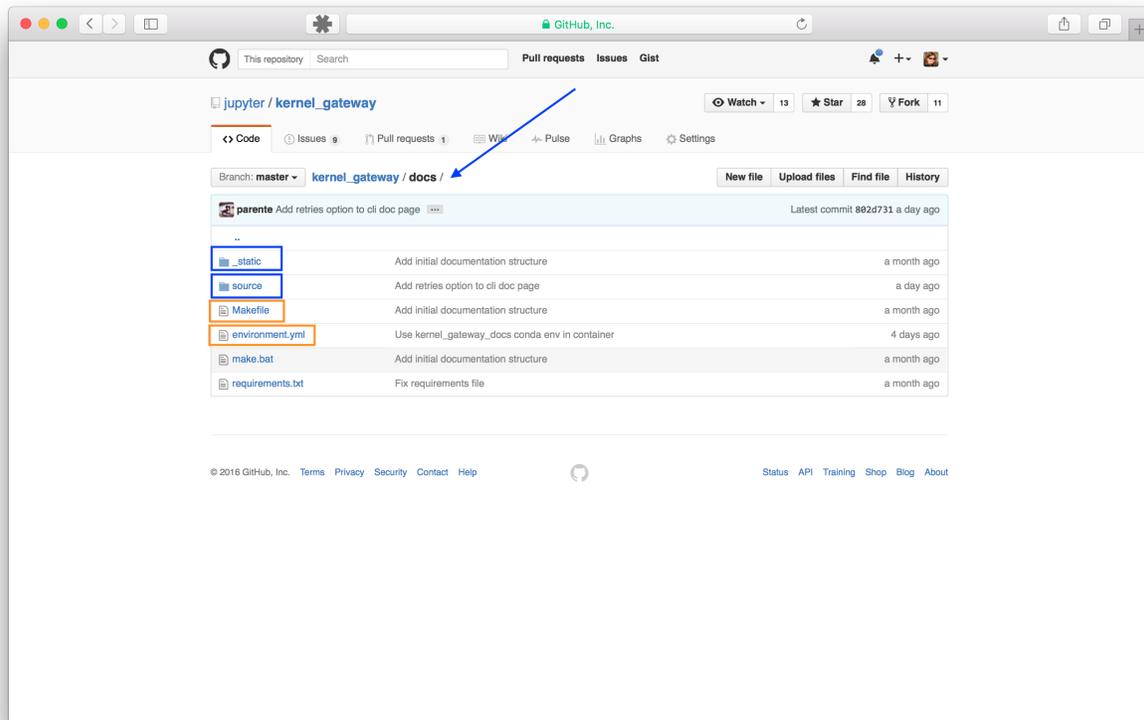

Sphinx

- `conf.py` : Sphinx configuration file
- `index.rst` of `contents.rst` : Sphinx master table of contents file
- `_static` directory : contains images, drawings, icons
- `_templates` directory: overrides theme templates and layouts
- `build` directory : html files generated by Sphinx (do not check this directory into GitHub)

Setting up a README


Providing users and developers consistency across repos is a valuable time saver and improves user productivity.

On a larger scope, having the Jupyter name appear prominently in a repo's README.md file improves the project's name awareness.

Recommended elements in Jupyter project repos


Link in repo description

Please include a link to the documentation in the repo's description.

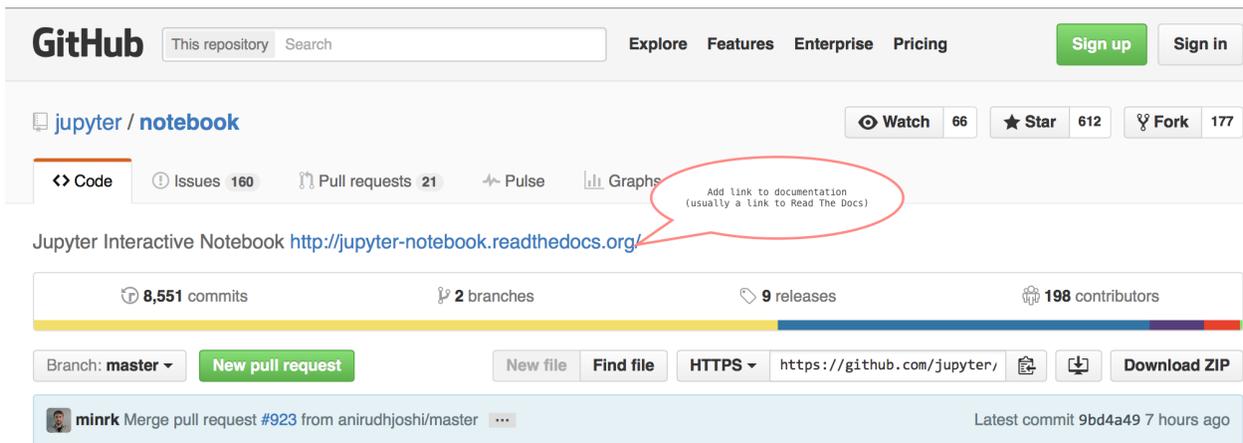

Badges in README

One common way that individuals find documentation is to look for and click on the doc badge that commonly is found right after the title. Another benefit is an easy visual indication if the docs are not rendering properly.

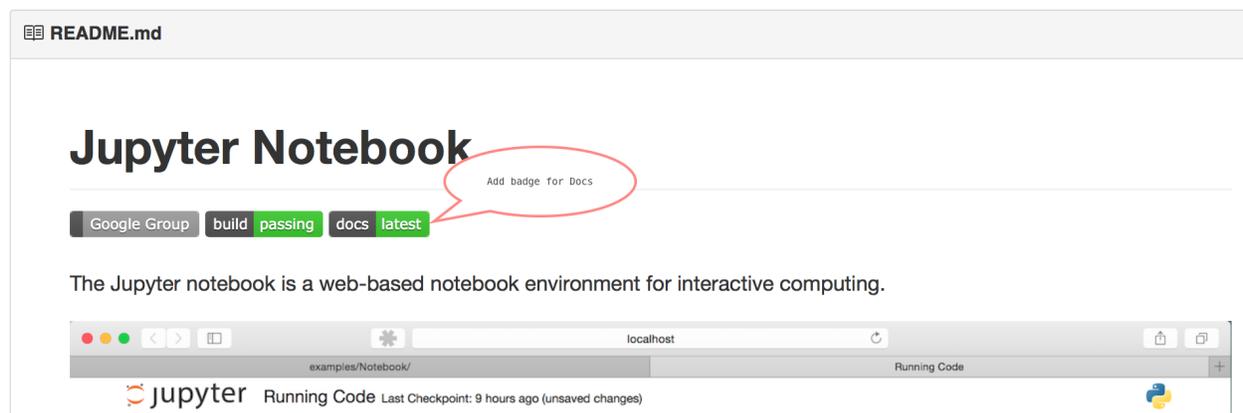

Resources section in README

A *Resources* section at the end of the README.md gives useful links and information to users about the individual project and the larger Project Jupyter organization. Make sure to include any links to the individual project's demo notebooks, if available.

For example, here is the [Resources section from jupyter/notebook]:(<https://github.com/jupyter/notebook/blob/master/README.md#resources>)

Checklist adding docs to a new or existing GitHub Repo

- Add a link to documentation in repo description (requires GitHub repo privileges)
- Add badges to README (Edit README.md and submit pull request)
- Add resources section to README (Edit README.md and submit pull request)

Dated: 1-4-2016 Revised: 1-7-2016

Building automatically on ReadTheDocs

This explains how to automatically rebuild documentation on ReadtheDocs every time a pull request is merged into its corresponding GitHub repo.

Using the ReadTheDocs service

Webhooks and services can be enabled in GitHub repo settings to allow third party services such as ReadTheDocs. The ReadTheDocs service rebuilds the project documentation whenever a pull request is merged into the GitHub repo.

Navigate to Settings

Each GitHub repo has a Settings tab at the far right of the repo menubar. Navigate to Settings and then the **Webhooks & services** submenu tab.

The screenshot shows the GitHub repository settings page for `ipython / ipywidgets`. The repository has 20 watches, 130 stars, and 72 forks. The navigation bar includes links for Code, Issues (43), Pull requests (6), Wiki, Pulse, Graphs, and Settings. The Settings page is divided into two main sections: Webhooks and Services.

Webhooks: This section allows external services to be notified of repository events. It includes an "Add webhook" button and a list of existing webhooks. One webhook is shown with the URL `https://webhooks.gitter.im/e/b6060437783c129cf713` and triggers for `push`, `issues`, and `issue_com...`.

Services: This section provides pre-built integrations. An "Add service" button is visible. An "Available Services" modal window is open, showing a search input with the text "read" and a dropdown menu with "ReadTheDocs" selected. Below the modal, there is a "Browse the directory" button and a "Travis CI" service listed at the bottom.

Add the ReadTheDocs service

Select **Add service** and enter `ReadTheDocs` in the **Available Services** input box.

The Services/Add ReadTheDocs window will open. Press the green **Add service** button to activate the ReadTheDocs service.

The screenshot shows the GitHub repository settings for `ipython / ipywidgets`. The 'Settings' tab is active, and the 'Services / Add ReadTheDocs' section is expanded. The configuration shows the service is active and will run on triggered events. A green 'Add service' button is visible at the bottom of the configuration panel.

Success

The ReadTheDocs service is added successfully. The service will take effect on the next merged pull request to the project repo.

The screenshot shows the same GitHub repository settings page, but with a blue success message banner at the top: "Okay, that hook was successfully created." The 'Add service' button is no longer visible.

Created: 01-07-2016

Supporting translations of documentation

We support and encourage the translation of Jupyter documentation to other languages as one way of making our community more inclusive and diverse. We are working toward having a consistent model for translation of [Sphinx](#) documentation across Jupyter projects based on prior work in the [Python](#) and [Django](#) communities. This project (<https://jupyter.readthedocs.io>) and the [Jupyter Docker Stacks](#) project are early adopters, meant to prove out the workflows described on this page.

Overview


After initial project setup, changes to Sphinx documentation and its translations follow a continuous integration (CI) and continuous deployment (CD), much like project source code.

Who is involved in translating documentation

Anyone is welcome to participate in writing and translating Jupyter documentation by participating in the workflow described below. This workflow has a handful of actors and components:

- A person who makes changes to the English project documentation
- A person who translates snippets of text in the English documentations into another language (locale)
- [Portable object files \(.po\)](#) for the source documentation language (e.g., U.S. English, `en-US`) and for other locales (e.g., Brazilian Portuguese, `pt-BR`; Moroccan Arabic, `ar-MA`)
- A continuous integration system like TravisCI, CircleCI, or GitHub Actions, responsible for
- [ReadTheDocs](#), our preferred service for building and hosting documentation
- [Transifex](#), a localization platform with free plans for open source projects, a friendly web interface, and support for `.po` files

The translation process

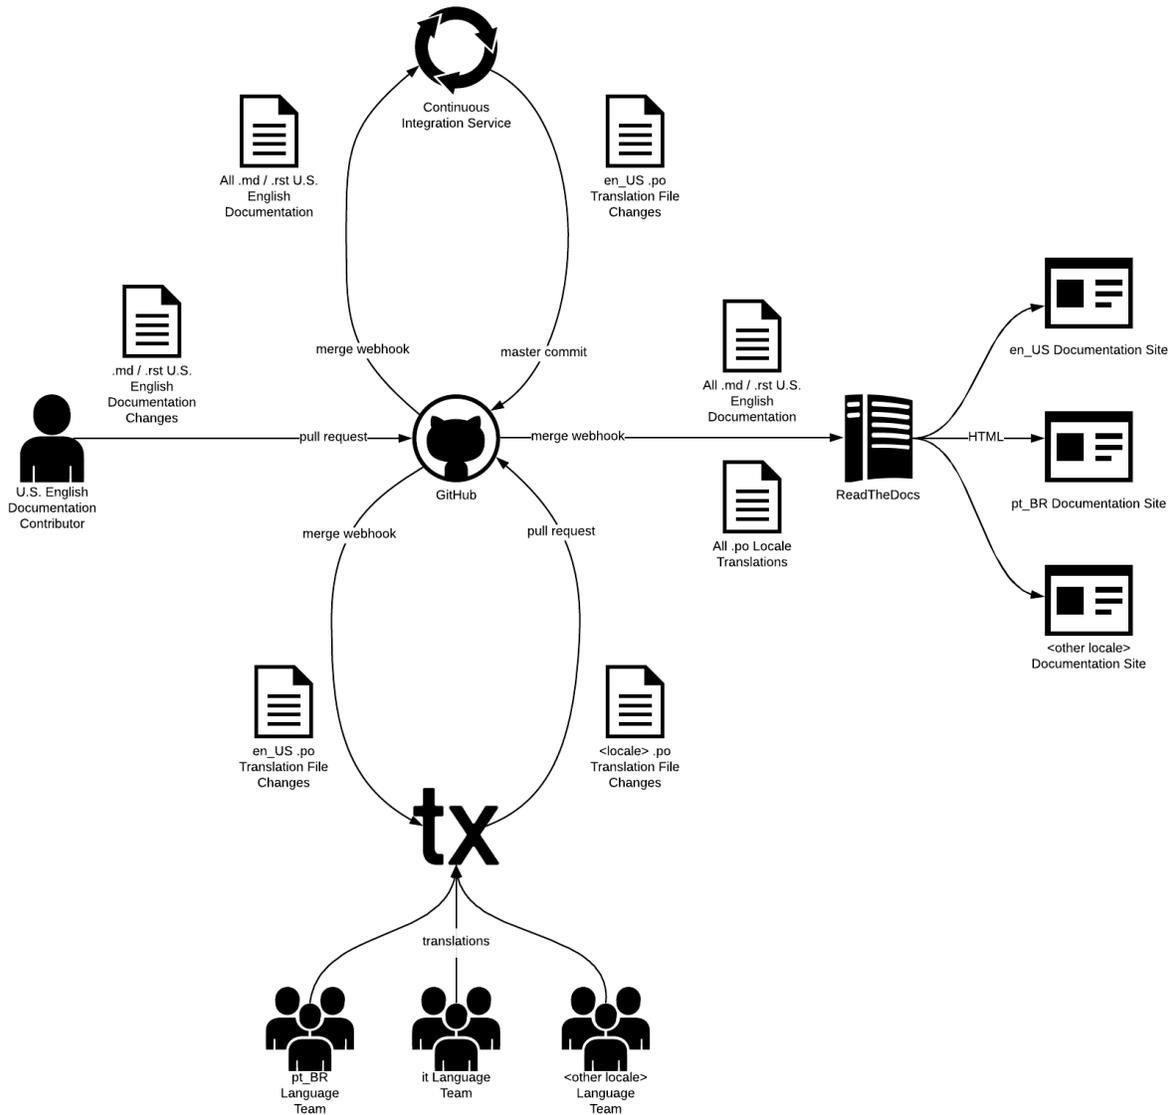

1. A user creates or edits reStructuredText (.rst) or Markdown (.md) documents written in U.S. English.
2. The user submits a pull request on GitHub.
3. A project maintainer reviews and merges the pull request.
4. ReadTheDocs runs Sphinx to convert U.S. English source documents into HTML (e.g., https://jupyter.readthedocs.io/en/latest/architecture/how_jupyter_ipython_work.html)
5. Meanwhile, the CI service runs Sphinx commands to extract translatable *messages* from U.S. English documents into en-US portable object (.po) files. For example:

```
# 5164fcd91a8a4700ac734562245773ad
#: ../../source/architecture/how_jupyter_ipython_work.rst:13
#: f68a21b0bc884dad9021c276e6490e6d
msgid ""
```

(continues on next page)

(continued from previous page)

```
"The IPython kernel that provides computation and communication with the "
"frontend interfaces, like the notebook"
msgid ""
```

6. The CI service commits the English .po files to the project on GitHub. (e.g., <https://github.com/jupyter/jupyter/commit/1330bc409842d8b8a7bbb3a1c63259c34a543be0>)
7. Transifex makes the messages in the English .po files available for translation in all configured languages.
8. Over time, translation teams use the Transifex web application to create, review, and update translations for those languages (e.g., <https://docs.transifex.com/translation/translating-with-the-web-editor>)
9. Transifex submits a pull request to the GitHub project containing a localized .po file when all of the English messages have been translated, and optionally reviewed, for a given language (e.g., <https://github.com/jupyter/jupyter/pull/485>). For example:

```
# 5164fcd91a8a4700ac734562245773ad
#: ../../source/architecture/how_jupyter_ipython_work.rst:13
msgid ""
"The IPython kernel that provides computation and communication with the "
"frontend interfaces, like the notebook"
msgstr ""
"The IPython kernel que fornece o cálculo e a comunicação com as interfaces "
"de frontend como o notebook"
```

10. A project maintainer reviews and merges the pull request.
11. ReadTheDocs once again runs Sphinx to convert U.S. English source documents into HTML.
12. ReadTheDocs also runs Sphinx to load localized .po files, substitute translations into the original English text, and convert those translated documents into HTML (e.g., https://jupyter.readthedocs.io/pt_BR/latest/architecture/how_jupyter_ipython_work.html)

Note: We recognize this flow assumes documentation starts life written in U.S. English. We should look into removing this assumption in the future if it becomes a significant barrier to new contributions.

Community translator workflows

We are delighted when members of the Jupyter community want to help translate documentation. We use [Transifex](#) to on-board translators in a friendly web interface without requiring knowledge of git, GitHub, Sphinx, or other software developer tools.

Creating translations

[Getting Started as a Translator](#) is an excellent on-boarding guide for new Transifex users. Follow the instructions to create an account. When prompted to join a team, look for *jupyter-meta-documentation* to start contributing translations to this documentation site. Alternatively, visit <https://www.transifex.com/project-jupyter/jupyter-meta-documentation/> after creating your account and request to join the project. A project maintainer or language team coordinator will review and approve your request.

Reviewing translations

Transifex supports [Reviewing Translations](#), peer review by members of a language team, to ensure translation quality. Project maintainers can choose whether Transifex should immediately send a pull request when translations of all text in a document are available or delay submitting a pull request until after all of those translations are also reviewed (the [current setting for this project](#)).

Coordinating translation teams

Project maintainers can also grant Transifex team members the role of [language coordinator](#). Language coordinators have permission to invite users to language teams, approve or deny join requests, assign language team roles, and perform other administrative actions for a particular project language. Empowering trusted members of the community as coordinators can help grow translation teams without software developer involvement.

Administrator workflows

The translation CI/CD workflow described above requires configuration in GitHub and in Transifex to function. Project maintainers can follow the instructions below to enable translations for their Sphinx documentation.

Creating a Transifex organization

Transifex organizes translation projects under organizations that mirror organizations and repositories on GitHub. At present, only the <https://github.com/jupyter> organization has a corresponding org on Transifex (<https://www.transifex.com/project-jupyter/public/>) with the following [organization administrators](#):

- @choldgraf
- @parente
- @willingc

GitHub users with permissions to install applications in a GitHub org can follow these instructions to create a new Transifex-GitHub organization link (e.g., for <https://github.com/jupyterhub>, <https://github.com/jupyterlab>).

1. Create a new user account at <https://transifex.com>.
2. Complete the sign-up wizard.
3. Create and name a new organization.
4. Click the organization drop down in the top right of the Transifex dashboard page and select *Organization Settings*.
5. Click *Details* in the left sidebar.
6. Click *inviting administrators* in the *Management* section to add additional admins to the Transifex org.
7. Click *Manage integrations* in the left sidebar.
8. Click *Install the Transifex app* in the GitHub section.
9. Select the GitHub organization to associate with the new Transifex organization.
10. Select the repositories that Transifex will have permission to access.
11. Return to the tab where you clicked *Install the Transifex app* and click *authorize Transifex* in the GitHub section.
12. Choose the GitHub organization you just configured in the popup dialog.

Note that you can revise the GitHub-Transifex integration at any time by visiting <https://github.com/settings/installations>.

Creating a Transifex project

Transifex [organization administrators](#) can follow the instructions below to configure new translation projects for GitHub projects in the GitHub org corresponding to the one on Transifex.

1. Visit <https://www.transifex.com>.
2. Sign in with the appropriate admin user account for the organization.
3. Click the organization drop down in the top right of the Transifex dashboard page and select *Organization Settings*.
4. Click *Create new project* in the lower left sidebar.
5. Name the translation project after the project on GitHub.
6. Select *Public* as the privacy type, indicate that the project is open source, and provide the GitHub URL for the repository.
7. Select a file-based project.
8. Create a new team for the project.
9. Select *English (en)* as the source language.
10. Select known target languages. (You can add these later as well.)
11. Click *Create project*.
12. Click *Settings* under the project name in the left sidebar.
13. Click the *Maintainers* tab.
14. Invite additional [project maintainers](#), typically software developers who will be responsible for maintaining the continuous integration and bootstrapping language teams.

Configuring languages and teams

Transifex organization admins and project managers can add translation languages to a project.

1. Visit <https://www.transifex.com>.
2. Sign in with the appropriate admin user account for the organization.
3. Click *Languages* under the project name in the left sidebar.
4. Click *Edit languages*.
5. Add or remove target translation languages.
6. Click *Apply*.

Organization admins, project maintainers, and [team managers](#) can add users to translation teams with the roles of language coordinator, reviewer, or translator.

1. Click *Teams* in the top nav bar.
2. Click the *Invite Collaborators* button in the top right.

3. Enter the username, email address, or full name of a person to add to the project. Note that the autocomplete in this field does not always display a popup for the user you wish to invite. Confirm you've entered the correct value and move on.
4. Select the [role](#) to assign to the user.
5. If the role applies to a specific team, select the team.
6. If the role applies to a specific language, select the language.
7. Click *Invite more* to enter additional users or *Send invitation*.

Configuring Transifex-GitHub integration

After configuring organization and project resources on Transifex, project developers can:

- configure Sphinx to produce `.po` files for the source language and read `.po` files containing translations
- configure Transifex to watch for source language `.po` file changes
- configure the project CI service to update source language `.po` files when contributors make changes to the source documentation

The instructions in this section assume a git repository already contains Sphinx documentation in the following directory structure:

```
my-project/  
  docs/  
    build/           # built sphinx artifacts go here  
    source/         # documentation source is in here  
      conf.py       # sphinx config file  
      index.rst     # root of the documentation  
      requirements.txt # sphinx, sphinx-intl, etc.
```

Project developers can do the following to configure Sphinx to seed source `.po` files and recognition translation `.po` files.

1. Add `sphinx-intl` to your Sphinx project `requirements.txt` or `environment.yaml` if it does not already exist.
2. Run `sphinx-intl create-txconfig` in the `docs/` directory.
3. Add the following to the Sphinx `source/conf.py` file.

```
# -- Translation -----  
  
gettext_uuid = True  
locale_dirs = ["locale/"]
```

3. Run `make gettext` to extract all strings from the English source documentation.
4. Run `sphinx-intl update -l en` to generate the English source `.po` files.
5. Submit, review, and merge a pull request with the changes and generated `.po` files.

After merging the pull request, link to the Transifex project to the GitHub repository.

1. Visit <https://www.transifex.com>.
2. Click *Settings* under the project name in the left sidebar.
3. Click the *Integrations* tab.

4. Click *Link Repository* in the GitHub section.
5. Select the appropriate GitHub repository and integration branch. Then click *Next*.
6. Copy and paste the following configuration into the dialog, adjusting the commented values as appropriate, and then click *Next*.

```
filters:
- filter_type: dir
  file_format: PO
  source_file_extension: po
  # Change this if you selected a different source language during project setup
  source_language: en
  # The path in the GitHub repository where the source .po files reside
  source_file_dir: "docs/source/locale/en/LC_MESSAGES"
  # The path in the GitHub repository where translation .po files reside
  translation_files_expression: "docs/source/locale/<lang>/LC_MESSAGES"
```

7. Select when Transifex will submit translations a back to the repository. Then click *Save & Sync*.
8. Click *Close*.
9. Watch the sync status progress.
10. Click *Resources* in the left sidebar.
11. Click one of the `.po` files to see translation progress by language.
12. Click one of the languages to see details about translation progress, translate text, and review translations. See the *Translator workflows* section above for details.

After confirming the initial English `.po` files have reached Transifex, set up continuous integration to ensure source strings are kept up-to-date in Transifex whenever the English documentation changes. The steps to accomplish this end vary depending on the CI provider. The following describes how what to do when using GitHub Actions.

1. Create a new GitHub actions workflow file `.github/workflows/gettext.yml` in the project.
2. Add the following content to the file. Note that `secrets.GITHUB_TOKEN` is a built-in secret, not something you need to configure ahead of time.

```
name: Extract Translatable Strings

# Run on all branch pushes
on:
  push:
    paths:
      - "docs/source/**"
      - "!docs/source/locale/**"
      - ".github/workflows/gettext.yml"

jobs:
  gettext:
    runs-on: ubuntu-latest
    steps:
      - name: Checkout Code
        uses: actions/checkout@master
      - name: Set up Python
        uses: actions/setup-python@v2
        with:
```

(continues on next page)

```

    python-version: "3.x"
  - name: Install dependencies
    working-directory: docs
    run: pip install -r requirements.txt
  - name: Extract source strings
    working-directory: docs
    run: |
      make gettext
      sphinx-intl update -l en
  - name: Push to master
    # Only commit changes to master if master just changed
    if: github.ref == 'refs/heads/master'
    uses: mikeal/publish-to-github-action@master
    env:
      GITHUB_TOKEN: ${ secrets.GITHUB_TOKEN }

```

3. Submit, review, and merge a pull request containing the workflow YAML.

Once you complete the steps in this section, any changes to the source English documentation on the master branch are pulled into Transifex for translation. Likewise, any translations completed on Transifex are submitted as pull requests back to the project on GitHub.

Hosting translations on ReadTheDocs


ReadTheDocs supports building HTML documentation sites from a single GitHub project and its translations. Administrators of the source language documentation project on ReadTheDocs can following these instructions to enable builds for other languages.

1. Visit <https://readthedocs.org/dashboard/>
2. Note the name of existing ReadTheDocs project containing your source language (e.g., `jupyter`).
3. Click **Import a Project**.
4. Click **Import Manually**.
5. Enter the project name you noted above suffixed with a target language locale (e.g., `jupyter-es`, `jupyter-pt-br`).
6. Enter the GitHub URL of the project.
7. Check *Edit advanced project options*.
8. Click *Next*.
9. Select the name of the target language from the *Language* drop down (e.g. `es` -> *Spanish*, `es-mx` -> *Mexican Spanish*, `pt-br` -> *Brazilian Portuguese*).
10. Click **Finish**.
11. Return to the list of projects at <https://readthedocs.org/dashboard/>
12. Click the project containing the source language.
13. Click *Admin*.
14. Click *Translations*.
15. Choose the name of the translation project created in step 5 from the *Project* drop down.

16. Click *Add*.

17. Repeat these steps for all other languages the project supports.

Now, any time you merge a pull request from Transifex containing .po translation file updates, ReadTheDocs will build both the source documentation site as well as sites for all supported languages. ReadTheDocs will associate the sites with one another and make them accessible via language links in a popup.

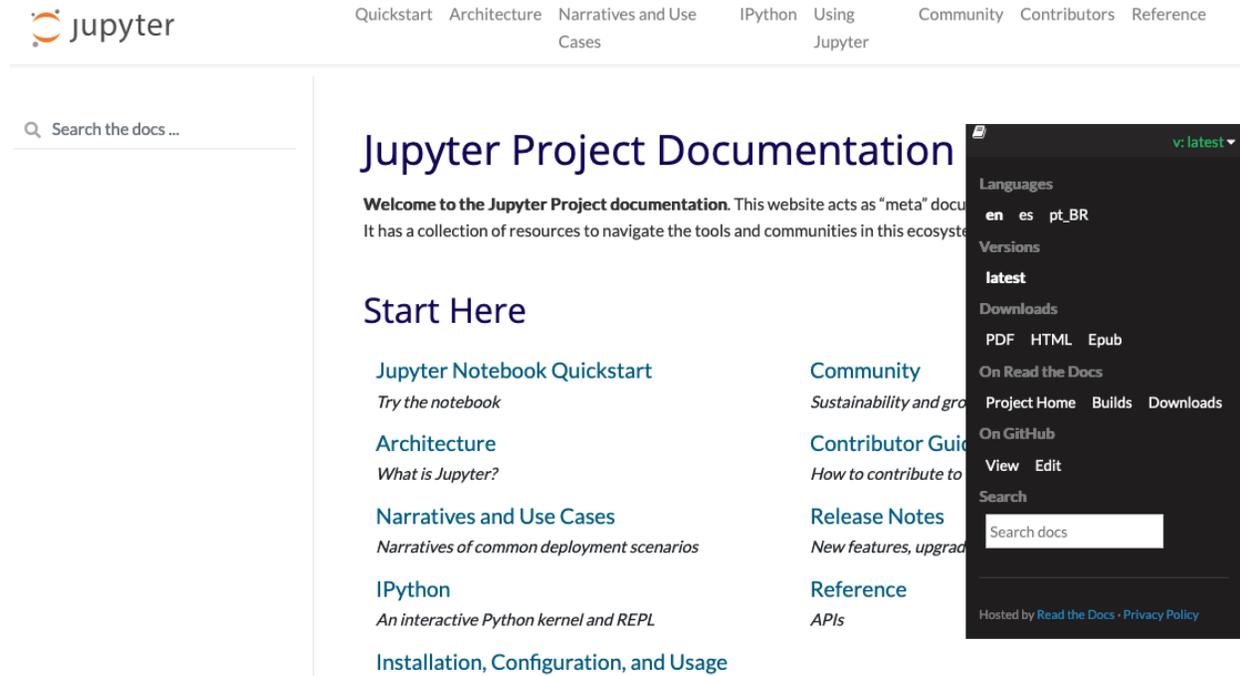

Reference

<https://github.com/parente/helloworld-transifex-rtd> is a mini-project configured to support the entire workflow described in this document.

This section helps a contributor set up the documentation infrastructure for a new project or an existing project without Sphinx documentation.

Documentation helps guide new users, fosters communication between developers, and shares tips and best practices with other community members. That's why the Jupyter project is focused on documenting new features and to keeping the documentation up-to-date.

3.5.4 Communications Guide

Contents

- *Blog*
 - *Technical overview*
 - *Basic workflow from blog idea to published post*
 - *Creating a draft*

- * *Title and metadata*
- * *Working with images*
- * *Links*
- *Draft review*
 - * *Ask for a review*
- *Editorial acceptance*
 - * *Publishing the post*
 - * *Changing an existing post*
- *Posts Updates*
- *Newsletter*
- *Website*

Blog

We publish our blog at <https://blog.jupyter.org>. We welcome ideas for posts or guest posts to the Jupyter blog. If you have a suggestion for a future post, please feel free to share your idea with us. We would like to discuss the idea with you.

Do you enjoy writing? Please contact us about becoming a guest blogger. We can help guide you through the process of creating a post.

Technical overview

Jupyter’s blog uses the Ghost blog platform for its contributor flexibility and ease of use. Jupyter’s blog is deployed at <https://blog.jupyter.org>.

Basic workflow from blog idea to published post

There are several major steps in the workflow from blog idea to a published post including:

- Be inspired to write a post
- Send us a message on the Jupyter mailing list and ask us for an author account on our blog
- Creating a draft
- Draft Review
- Editorial acceptance
- Publishing the post

We’ll cover each of these as well as how to update a post once it has been published.

Creating a draft

Title and metadata

Always check in the metadata fields that a blog post has a title and a canonical URL. It is possible to put the date in the canonical URL, in particular for events like jupyter-day, that can occur several times. The date of the event can differ from the date of the blog post.

Once a post is published, **never** change the post's title or the url. These changes will break links of tweets and RSS feeds that have already referenced the existing, published URL. Keep in mind that when publishing some platforms cache the url immediately; as a result changing the title will direct people to a 404 page.

Title and metadata can always be refined after the actual content of the blog is written, but should not be changed after publication. As a guest you do not have to worry about metadata, the editor or admins will take care of that.

Working with images

Try not to link to external images. If you want to put an image in the post, insert in the editor view and drag and drop an image from your desktop into the newly created field in the preview. External images can change, and can break the blog post if they are taken down. This cannot append if you drag and drop images. Moreover, these images will be served from the same CDN (Content Delivery Network) as the blog, which will insure the best overall experience for our readers.

The featured image you see at the top of a blog posts is set from within the metadata field, not using the . The featured image is treated differently than inlined images by many feedreaders (especially on mobile) and allows a user on a slow connection to read the content of the blog earlier, which is a much better experience for the user than waiting for the featured image to render.

Links

Do not use minified links when possible. The multiple redirects of minified links degrades the mobile browsing experience. If you need analytics of the number of page views, this information is tracked by Google Analytics.

Draft review

Ask for a review

Once you think you are done, ask someone else to reread your post, and check the various parameters that you might have forgotten before publishing. You are not on your own, this is teamwork, we are here to help you. If we do things in a hurry you will probably spend more time fixing mistakes that actually doing things right in a first place.

Editorial acceptance

Publishing the post

Usually an editor or admin will take care of publishing the post. The task of the Editor/Admin is to check all metadata are correctly set, that no external images are used, as well as all other quality check describe before.

It is then just a matter of making th post visible to everyone.

Changing an existing post

Posts Updates

Blog subscribers may receive notification at every update. So use updates and fixes parsimoniously. It is OK to wait a few hours to fix a typo.

If some substantial updates have to be made, like change of location, time etc, please insert an *[Update]* section at top (or bottom of the blog post depending on importance) with the Date/Time of the update. If the information in the body of the blog is wrong, try not to replace it, and just use strike-through to mark it as obsolete. This would help reader determine which information is correct when dealing with multiple source giving different information.

Newsletter

Documentation in progress.

Website

Documentation in progress.

3.5.5 IPython Development Guide (source: old IPython wiki)

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

IPython does all of its development using GitHub. All of our development information is hosted on this GitHub wiki. This page indexes all of that information. Developers interested in getting involved with IPython development should start here.

IPython on GitHub

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

Notes on working with GitHub

Milestones

- 100% of confirmed issues should have a milestone.
- An issue should never be closed without a milestone.
- All pull requests should have a milestone.
- All issues closed should be marked with the next release milestone, next backport milestone, or **no action**.
- Open issues should only lack a milestone if:
 - more clarification is required (label: `needs-info`)
- In general, there will be four milestones with open issues:
 - **next minor release**. This milestone contains issues that should be backported for the next minor release. See *below* for information on backporting.
 - **next major release**. This should be the default milestone of all issues. As the release approaches, issues can be explicitly bumped to next release + 1.
 - **next major release + 1**. Only issues that we are confident will *not* be included in the next release go here. This milestone should be mostly empty until relatively close to release.
 - **wishlist**. This is the milestone for issues that we have no immediate plans to address.
- The remaining milestone is **no action** for open or closed issues that require no action:
 - Not actually an issue (e.g. questions, discussion, etc.)
 - Duplicate of an existing Issue
 - Closed because we won't fix it
 - When an issue is closed with **no action**, it means that the issue will not be fixed, or it was not an issue at all.
- When closing an issue, it should always have one of these milestones:
 - **next minor release** because the issue has been addressed
 - **next major release** because the issue has been addressed
 - **no action** because the issue *will not* be addressed, or it is a duplicate/non-issue.

In general: When in doubt, mark with **next release**. We can always push back when we get closer to a given release.

Labels and issues

Issues should always be labeled once they are confirmed (not necessary for issues that are still being clarified, or may be duplicates or not issues at all).

Some significant labels:

- `needs-info`: issue needs more information from submitter before progress can be made
- `bug`: errors are raised, or unintended behavior occurs
- `enhancement`: improvements that are not bugs
- `backport-X.Y.Z`: Any fix for this issue should be backported to the maintenance branch. backports are expressed with milestones, starting with 2.1.
- `prio-foo`: a priority level for ranking issues - nonessential, but `prio-high/low` are useful for explicitly promoting/demoting issues, particularly when nearing release.

- **ClosedPR:** This issue is a reminder for a PR that was closed for going stale.
- **sprint-friendly:** Obvious or easy fixes, where

All confirmed issues should at least have a **bug** or **enhancement** label, and be marked with any affected components (e.g. `parallel`, `qtconsole`, `htmlnotebook`), or particular sources of error (e.g. `py3k` or `unicode`) if we have appropriate labels.

The `sprint-friendly` label is probably the best place for new contributors to start.

Pull Requests

- All work is submitted via Pull Requests.
- Pull Requests can be submitted as soon as there is code worth discussing. Pull Requests track the branch, so you can continue to work after the PR is submitted. Review and discussion can begin well before the work is complete, and the more discussion the better. The worst case is that the PR is closed.
- Pull Requests that have stalled should be closed (see [\[\[our policy on closing PRs|Dev: Closing Pull Requests\]\]](#))
- Pull Requests should always be made against master (backporting PRs is described below).
- Pull Requests should be tested, if feasible:
 - bugfixes should include regression tests
 - new behavior should at least get minimal exercise

[Travis](#) does a pretty good job testing IPython and Pull Requests, but it may make sense to manually perform tests (possibly with our `test_pr` script), particularly for PRs that affect `IPython.parallel` or Windows.

Opening an Issue

When opening a new issue, please take the following steps:

1. Search GitHub and/or Google for your issue to avoid duplicate reports. Keyword searches for your error messages are most helpful.
2. If possible, try updating to master and reproducing your issue, because we may have already fixed it.
3. Try to include a minimal reproducible test case
4. Include relevant system information. Start with the output of:

```
python -c "import IPython; print(IPython.sys_info())"
```

And include any relevant package versions, depending on the issue, such as `matplotlib`, `numpy`, `Qt`, `Qt bindings` (`PyQt/PySide`), `tornado`, `web browser`, etc.

Backporting

- We should keep an `A.x` maintenance branch for backporting fixes from master.
- That branch shall be called `A.x`, e.g. `2.x`, not `2.1`. This way, there is only one maintenance branch per release series.
- When an Issue is determined to be appropriate for backporting, it should be marked with the `A.B` milestone.
- Any Pull Request which addresses a backport issue should also receive the same milestone.
- Patches are backported to the maintenance branch by applying the pull request patch to the maintenance branch (currently with the `backport_pr` script).

The Perfect Pull Request

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

A brief guide to making and reviewing pull requests.

1. It works

The code does what it's supposed to!

2. It works on all of the platforms that IPython officially supports

IPython has to work on:

- Linux of various kinds, Windows & Mac
- Python 2 & 3

3. Handles unicode issues properly

Much of our code base deals with strings and unicode. This needs to be done in a manner that is unicode aware and works on Python 2 and 3. [This article] (<http://www.joelonsoftware.com/articles/Unicode.html>) is a good intro to unicode.

4. Adheres to our coding style

Coding style refers to how source code is formatted and how variables, functions, methods and classes are named. Your code should follow our coding style, which is described [[here]Dev: Coding style]].

5. Clean & commented

The code should be well organized, and have inline comments where appropriate. When we look at the code, it should be clear what it's doing and why. It should not break abstractions that we have established in the project.

6. Tested

If it fixes a bug, the pull request should ideally add an automated test that fails without the fix, and passes with it. Normally it should be sufficient to copy an existing test and tweak it. New functionality should come with its own tests as well. Details about testing IPython can be found [\[\[here|Dev: Testing\]\]](#).

7. Well documented

Don't forget to update docstrings, and any relevant parts of [the official documentation](#). New features or significant changes warrant an entry in the *What's New* section too. Details about documenting IPython can be found [\[\[here|Dev: Documenting IPython\]\]](#).

Coding Style

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

This document describes our coding style. Coding style refers to the following:

- How source code is formatted (indentation, spacing, etc.)
- How things are named (variables, functions, classes, modules, etc.)

General coding conventions

In general, we follow the standard Python style conventions as described in Python's [PEP 8](#), the official Python Style Guide.

Other general comments:

- In a large file, top level classes and functions should be separated by 2 lines to make it easier to separate them visually.
- Use 4 spaces for indentation, **never** use hard tabs.
- Keep the ordering of methods the same in classes that have the same methods. This is particularly true for classes that implement similar interfaces and for interfaces that are similar.

Naming conventions

For naming conventions, we also follow the guidelines of [PEP 8](#). Some of the existing code doesn't honor this perfectly, but for all new and refactored IPython code, we'll use:

- All lowercase module names. Long module names can have words separated by underscores (`really_long_module_name.py`), but this is not required. Try to use the convention of nearby files.
- CamelCase for class names.
- lowercase_with_underscores for methods, functions, variables and attributes.
- Implementation-specific *private* methods will use `_single_underscore_prefix`. Names with a leading double underscore will *only* be used in special cases, as they makes subclassing difficult (such names are not easily seen by child classes).
- Occasionally some run-in lowercase names are used, but mostly for very short names or where we are implementing methods very similar to existing ones in a base class (like `runlines()` where `runsource()` and `runcode()` had established precedent).
- The old IPython codebase has a big mix of classes and modules prefixed with an explicit IP of `ip`. This is not necessary and all new code should not use this prefix. The only case where this approach is justified is for classes or functions which are expected to be imported into external namespaces and a very generic name (like `Shell`) that is likely to clash with something else. However, if a prefix seems absolutely necessary the more specific `IPY` or `ipy` are preferred.
- All JavaScript code should follow these naming conventions as well.

Attribute declarations for objects

In general, objects should declare, in their *class*, all attributes the object is meant to hold throughout its life. While Python allows you to add an attribute to an instance at any point in time, this makes the code harder to read and requires methods to constantly use checks with `hasattr()` or `try/except` calls. By declaring all attributes of the object in the class header, there is a single place one can refer to for understanding the object's data interface, where comments can explain the role of each variable and when possible, sensible defaults can be assigned.

If an attribute is meant to contain a mutable object, it should be set to `None` in the class and its mutable value should be set in the object's constructor. Since class attributes are shared by all instances, failure to do this can lead to difficult to track bugs. But you should still set it in the class declaration so the interface specification is complete and documented in one place.

A simple example:

```
class Foo(object):
    # X does..., sensible default given:
    x = 1
    # y does..., default will be set by constructor
    y = None
    # z starts as an empty list, must be set in constructor
    z = None

    def __init__(self, y):
        self.y = y
        self.z = []
```

New files

When starting a new Python file for IPython, you can use the [following template](#) as a starting point that has a few common things pre-written for you.

Documenting IPython

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

When contributing code to IPython, you should strive for clarity and consistency, without falling prey to a style strait-jacket. Basically, ‘document everything, try to be consistent, do what makes sense.’

By and large we follow existing Python practices in major projects like Python itself or NumPy, this document provides some additional detail for IPython.

Standalone documentation

All standalone documentation should be written in plain text (`.txt`) files using reStructuredText [reStructuredText]_ for markup and formatting. All such documentation should be placed in the directory `docs/source` of the IPython source tree. Or, when appropriate, a suitably named subdirectory should be used. The documentation in this location will serve as the main source for IPython documentation.

The actual HTML and PDF docs are built using the Sphinx [Sphinx]_ documentation generation tool. Once you have Sphinx installed, you can build the html docs yourself by doing:

```
$ cd ipython-mybranch/docs
$ make html
```

Our usage of Sphinx follows that of matplotlib [Matplotlib]_ closely. We are using a number of Sphinx tools and extensions written by the matplotlib team and will mostly follow their conventions, which are nicely spelled out in their documentation guide [MatplotlibDocGuide]_. What follows is thus an abridged version of the matplotlib documentation guide, taken with permission from the matplotlib team.

If you are reading this in a web browser, you can click on the “Show Source” link to see the original reStructuredText for the following examples.

A bit of Python code:

```
for i in range(10):
    print i,
print "A big number:",2**34
```

An interactive Python session:

```
>>> from IPython.utils.path import get_ipython_dir
>>> get_ipython_dir()
'/home/fperez/.config/ipython'
```

An IPython session:

```
In [7]: import IPython

In [8]: print "This IPython is version:",IPython.__version__
This IPython is version: 0.9.1

In [9]: 2+4
Out[9]: 6
```

A bit of shell code:

```
cd /tmp
echo "My home directory is: $HOME"
ls
```

Docstring format

Good docstrings are very important. Unfortunately, Python itself only provides a rather loose standard for docstrings [PEP257]_, and there is no universally accepted convention for all the different parts of a complete docstring. However, the NumPy project has established a very reasonable standard, and has developed some tools to support the smooth inclusion of such docstrings in Sphinx-generated manuals. Rather than inventing yet another pseudo-standard, IPython will be henceforth documented using the NumPy conventions; we carry copies of some of the NumPy support tools to remain self-contained, but share back upstream with NumPy any improvements or fixes we may make to the tools.

The NumPy documentation guidelines [NumPyDocGuide]_ contain detailed information on this standard, and for a quick overview, the NumPy example docstring [NumPyExampleDocstring]_ is a useful read.

For user-facing APIs, we try to be fairly strict about following the above standards (even though they mean more verbose and detailed docstrings). Wherever you can reasonably expect people to do introspection with:

```
In [1]: some_function?
```

the docstring should follow the NumPy style and be fairly detailed.

For purely internal methods that are only likely to be read by others extending IPython itself we are a bit more relaxed, especially for small/short methods and functions whose intent is reasonably obvious. We still expect docstrings to be written, but they can be simpler. For very short functions with a single-line docstring you can use something like:

```
def add(a, b):
    """The sum of two numbers.
    """
    code
```

and for longer multiline strings:

```
def add(a, b):
    """The sum of two numbers.

    Here is the rest of the docs.
    """
    code
```

Here are two additional PEPs of interest regarding documentation of code. While both of these were rejected, the ideas therein form much of the basis of docutils (the machinery to process reStructuredText):

- Docstring Processing System Framework

- Docutils Design Specification

note

In the past IPython used epydoc so currently many docstrings still use epydoc conventions. We will update them as we go, but all new code should be documented using the NumPy standard.

Building and uploading

The built docs are stored in a separate repository. Through some github magic, they're automatically exposed as a website. It works like this:

- You will need to have sphinx and latex installed. In Ubuntu, install `texlive-latex-recommended texlive-latex-extra texlive-fonts-recommended`. Install the latest version of sphinx from PyPI (`pip install sphinx`).
- Ensure that the development version of IPython is the first in your system path. You can either use a virtualenv, or modify your PYTHONPATH.
- Switch into the docs directory, and run `make gh-pages`. This will build your updated docs as html and pdf, then automatically check out the latest version of the docs repository, copy the built docs into it, and commit your changes.
- Open the built docs in a web browser, and check that they're as expected.
- (When building the docs for a new tagged release, you will have to add its link to `index.rst`, then run `python build_index.py` to update `index.html`. Commit the change.)
- Upload the docs with `git push`. This only works if you have write access to the docs repository.
- If you are building a version that is not the current dev branch, nor a tagged release, then you must run `gh-pages.py` directly with `python gh-pages.py <version>`, and *not* with `make gh-pages`.

Lab Meetings on Air

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

Academic labs have long had the tradition of the weekly lab meeting, where all topics of interest to the lab are discussed. IPython has strong roots in academia, but it is also an open source project that needs to engage an active international community. So while our goal with IPython is not to publish the next paper, we've been thinking about the value these regular discussions bring to how teams work on sustained efforts involving difficult problems, and wanted to bring that bit of academic practice into the open source workflow. So we have decided to conduct weekly "lab meetings" for IPython, that will be held publicly using a Google Hangout on Air.

Logistics

We are trying to keep things simple and with a minimum of new moving parts:

- Meetings happen on Tuesdays at 10am California time (i.e. UTC-8 or -7 depending on the time of year).
- We broadcast the meeting as it happens via G+ and leave the public YouTube link afterwards.
- During the meeting, all chat that needs to happen by typing can be done on our [Gitter chat room](#).
- We keep a running document with [minutes of the meeting on HackPad](#) where we summarize main points. (2015 part 1)

We welcome and encourage help from others in updating these minutes during the meeting, but we'll make no major effort in ensuring that they are a detailed and accurate record of the whole discussion. We simply don't have the time for that.

Prior meetings

You can find a list of the videos on the [ipythondev YouTube user page](#).

Policy on Closing Pull Requests

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

IPython has the following policy on closing pull requests. The goal of this policy is to keep our pull request queue small and allow us to focus on code that is being actively developed and has a strong chance of being merged in master soon.

A pull request will be closed when:

- It has been reviewed, but has sat for a month or more waiting for the submitter to commit more code to address the comments.
- The review process has uncovered larger design or technical issues that extend beyond the details of the specific pull request.
 - In particular, we do not accept whole large “cleanup” changes which do not address any specific bug. This includes trailing whitespace, PEP8, etc. One of the reasons is that such massive cleanup provide plenty of opportunities to introduce new and subtle bugs.

In general we will not close pull requests because of a lack of review. If a pull request has sat for a month or more without review, we need to kick ourselves and get to reviewing it.

When a pull request is closed we will do the following:

- Post a github message to the pull request to confirm that everyone is fine with closing the pull request. This message should cite this policy.
- Open an issue to track the pull request. This issue should describe what would be needed in order to reopen the pull request.
- Post a github message to the pull request encouraging the submitter to continue with the work and detail what issues need to be addressed in order for the pull request to be reopened.

This policy was discussed in the following thread:

<https://mail.scipy.org/pipermail/ipython-dev/2012-August/010025.html>

Example Message:

Hi,

This PR has been inactive for 1 month now, so we are going to close it and open an issue to reference it. We try to keep our pull request queue small and focused on active work. We encourage you to reopen the pull request if and when you continue to work on this. Please contact us if you have any questions.

Thanks for contributing.

see <https://github.com/ipython/ipython/wiki/Dev%3A-Closing-pull-requests/> for our policies on closing pull requests.

Testing IPython for users and developers

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

Overview

It is extremely important that all code contributed to IPython has tests. Tests should be written as unittests, doctests or other entities that the IPython test system can detect. See below for more details on this.

Each subpackage in IPython should have its own `tests` directory that contains all of the tests for that subpackage. All of the files in the `tests` directory should have the word “tests” in them to enable the testing framework to find them.

In docstrings, examples (either using IPython prompts like `In [1]:` or ‘classic’ python `>>>` ones) can and should be included. The testing system will detect them as doctests and will run them; it offers control to skip parts or all of a specific doctest if the example is meant to be informative but shows non-reproducible information (like filesystem data).

If a subpackage has any dependencies beyond the Python standard library, the tests for that subpackage should be skipped if the dependencies are not found. This is very important so users don’t get tests failing simply because they don’t have dependencies.

The testing system we use is an extension of the `nose` test runner. In particular we’ve developed a `nose` plugin that allows us to paste verbatim IPython sessions and test them as doctests, which is extremely important for us.

Running the test suite

You can run IPython from the source download directory without even installing it system-wide or having configure anything, by typing at the terminal:

```
python2 -c "import IPython; IPython.start_ipython();"
```

To start the web-based notebook you can use:

```
python2 -c "import IPython; IPython.start_ipython(['notebook']);"
```

In order to run the test suite, you must at least be able to import IPython, even if you haven't fully installed the user-facing scripts yet (common in a development environment). You can then run the tests with:

```
python -c "import IPython; IPython.test()"
```

Once you have installed IPython either via a full install or using:

```
python setup.py develop
```

you will have available a system-wide script called `iptest` that runs the full test suite. You can then run the suite with:

```
iptest [args]
```

By default, this excludes the relatively slow tests for `IPython.parallel`. To run these, use `iptest --all`.

Please note that the `iptest` tool will run tests against the code imported by the Python interpreter. If the command `python setup.py symlink` has been previously run then this will always be the test code in the local directory via a symlink. However, if this command has not been run for the version of Python being tested, there is the possibility that `iptest` will run the tests against an installed version of IPython.

Regardless of how you run things, you should eventually see something like:

```
*****
Test suite completed for system with the following information:
{'commit_hash': '144fdae',
 'commit_source': 'repository',
 'ipython_path': '/home/fperez/usr/lib/python2.6/site-packages/IPython',
 'ipython_version': '0.11.dev',
 'os_name': 'posix',
 'platform': 'Linux-2.6.35-22-generic-i686-with-Ubuntu-10.10-maverick',
 'sys_executable': '/usr/bin/python',
 'sys_platform': 'linux2',
 'sys_version': '2.6.6 (r266:84292, Sep 15 2010, 15:52:39) \n[GCC 4.4.5]'}

Tools and libraries available at test time:
  curses matplotlib pymongo qt sqlite3 tornado wx wx.aui zmq

Ran 9 test groups in 67.213s

Status:
OK
```

If not, there will be a message indicating which test group failed and how to rerun that group individually. For example, this tests the `IPython.utils` subpackage, the `-v` option shows progress indicators:

```
$ iptest IPython.utils -- -v
.....SS..SSS.....S.S...
.....
-----
Ran 125 tests in 0.119s

OK (SKIP=7)
```

Because the IPython test machinery is based on nose, you can use all nose syntax. Options after `--` are passed to nose. For example, this lets you run the specific test `test_rehashx` inside the `test_magic` module:

```
$ iptest IPython.core.tests.test_magic:test_rehashx -- -vv
IPython.core.tests.test_magic.test_rehashx(True,) ... ok
IPython.core.tests.test_magic.test_rehashx(True,) ... ok

-----
Ran 2 tests in 0.100s

OK
```

When developing, the `--pdb` and `--pdb-failures` of nose are particularly useful, these drop you into an interactive pdb session at the point of the error or failure respectively: `iptest mymodule -- --pdb`.

The system information summary printed above is accessible from the top level package. If you encounter a problem with IPython, it's useful to include this information when reporting on the mailing list; use:

```
.. code:: python
```

```
    from IPython import sys_info print sys_info()
```

and include the resulting information in your query.

Testing pull requests

We have a script that fetches a pull request from Github, merges it with master, and runs the test suite on different versions of Python. This uses a separate copy of the repository, so you can keep working on the code while it runs. To run it:

```
python tools/test_pr.py -p 1234
```

The number is the pull request number from Github; the `-p` flag makes it post the results to a comment on the pull request. Any further arguments are passed to `iptest`.

This requires the `requests` and `keyring` packages.

For developers: writing tests

By now IPython has a reasonable test suite, so the best way to see what's available is to look at the `tests` directory in most subpackages. But here are a few pointers to make the process easier.

Main tools: `IPython.testing`

The `IPython.testing` package is where all of the machinery to test IPython (rather than the tests for its various parts) lives. In particular, the `iptest` module in there has all the smarts to control the test process. In there, the `make_exclude` function is used to build a blacklist of exclusions, these are modules that do not get even imported for tests. This is important so that things that would fail to even import because of missing dependencies don't give errors to end users, as we stated above.

The `decorators` module contains a lot of useful decorators, especially useful to mark individual tests that should be skipped under certain conditions (rather than blacklisting the package altogether because of a missing major dependency).

Our nose plugin for doctests

The `plugin` subpackage in `testing` contains a nose plugin called `ipdoctest` that teaches nose about IPython syntax, so you can write doctests with IPython prompts. You can also mark doctest output with `# random` for the output corresponding to a single input to be ignored (stronger than using ellipsis and useful to keep it as an example). If you want the entire docstring to be executed but none of the output from any input to be checked, you can use the `# all-random` marker. The `IPython.testing.plugin.dtxample` module contains examples of how to use these; for reference here is how to use `# random`:

```
def ranfunc():
    """A function with some random output.

    Normal examples are verified as usual:
    >>> 1+3
    4

    But if you put '# random' in the output, it is ignored:
    >>> 1+3
    junk goes here... # random

    >>> 1+2
    again, anything goes #random
    if multiline, the random mark is only needed once.

    >>> 1+2
    You can also put the random marker at the end:
    # random

    >>> 1+2
    # random
    .. or at the beginning.

    More correct input is properly verified:
    >>> ranfunc()
    'ranfunc'
```

(continues on next page)

```
"""
return 'ranfunc'
```

and an example of # all-random:

```
def random_all():
    """A function where we ignore the output of ALL examples.

    Examples:

    # all-random

    This mark tells the testing machinery that all subsequent examples
    should be treated as random (ignoring their output). They are still
    executed, so if a they raise an error, it will be detected as such,
    but their output is completely ignored.

    >>> 1+3
    junk goes here...

    >>> 1+3
    klasdfj;

    In [8]: print 'hello'
    world # random

    In [9]: iprand()
    Out[9]: 'iprand'
    """
    return 'iprand'
```

When writing docstrings, you can use the `@skip_doctest` decorator to indicate that a docstring should *not* be treated as a doctest at all. The difference between `# all-random` and `@skip_doctest` is that the former executes the example but ignores output, while the latter doesn't execute any code. `@skip_doctest` should be used for docstrings whose examples are purely informational.

If a given docstring fails under certain conditions but otherwise is a good doctest, you can use code like the following, that relies on the 'null' decorator to leave the docstring intact where it works as a test:

```
# The docstring for full_path doctests differently on win32 (different path
# separator) so just skip the doctest there, and use a null decorator
# elsewhere:

doctest_deco = dec.skip_doctest if sys.platform == 'win32' else dec.null_deco

@doctest_deco
def full_path(startPath, files):
    """Make full paths for all the listed files, based on startPath..."""

    # function body follows...
```

With our nose plugin that understands IPython syntax, an extremely effective way to write tests is to simply copy and paste an interactive session into a docstring. You can writing this type of test, where your docstring is meant *only* as a test, by prefixing the function name with `doctest_` and leaving its body *absolutely empty* other than the docstring.

In `IPython.core.tests.test_magic` you can find several examples of this, but for completeness sake, your code should look like this (a simple case):

```
def doctest_time():
    """
    In [10]: %time None
    CPU times: user 0.00 s, sys: 0.00 s, total: 0.00 s
    Wall time: 0.00 s
    """
```

This function is only analyzed for its docstring but it is not considered a separate test, which is why its body should be empty.

JavaScript Tests

We currently use `casperjs` for testing the notebook javascript user interface.

To run the JS test suite by itself, you can either use `iptest js`, which will start up a new notebook server and test against it, or you can open up a notebook server yourself, and then:

```
cd IPython/html/tests/casperjs;
casperjs test --includes=util.js test_cases
```

If your testing notebook server uses something other than the default port (8888), you will have to pass that as a parameter to the test suite as well.

```
casperjs test --includes=util.js --port=8889 test_cases
```

Running individual tests

To speed up development, you usually are working on getting one test passing at a time. To do this, just pass the filename directly to the `casperjs test` command like so:

```
casperjs test --includes=util.js test_cases/execute_code_cell.js
```

Wrapping your head around the javascript within javascript:

CasperJS is a browser that's written in javascript, so we write javascript code to drive it. The Casper browser itself also has a javascript implementation (like the ones that come with Firefox and Chrome), and in the test suite we get access to those using `this.evaluate`, and it's cousins (`this.theEvaluate`, etc). Additionally, because of the asynchronous / callback nature of everything, there are plenty of `this.then` calls which define steps in test suite. Part of the reason for this is that each step has a timeout (default of 5 or 10 seconds). Additionally, there are already convenience functions in `util.js` to help you wait for output in a given cell, etc. In our javascript tests, if you see functions which look like `pep8_naming_convention`, those are probably coming from `util.js`, whereas functions that come with `casper` have `CamelCaseNamingConvention`.

Each file in `test_cases` looks something like this (this is `test_cases/check_interrupt.js`):

```
casper.notebook_test(function () {
    this.evaluate(function () {
        var cell = IPython.notebook.get_cell(0);
```

(continues on next page)

(continued from previous page)

```
    cell.set_text('import time\nfor x in range(3):\n    time.sleep(1)');
    cell.execute();
});

// interrupt using menu item (Kernel -> Interrupt)
this.thenClick('li#int_kernel');

this.wait_for_output(0);

this.then(function () {
    var result = this.get_output_cell(0);
    this.test.assertEquals(result.ename, 'KeyboardInterrupt', 'keyboard interrupt_
↪(mouseclick)');
});

// run cell 0 again, now interrupting using keyboard shortcut
this.thenEvaluate(function () {
    cell.clear_output();
    cell.execute();
});

// interrupt using Ctrl-M I keyboard shortcut
this.thenEvaluate( function() {
    IPython.utils.press_ghetto(IPython.utils.keycodes.I)
});

this.wait_for_output(0);

this.then(function () {
    var result = this.get_output_cell(0);
    this.test.assertEquals(result.ename, 'KeyboardInterrupt', 'keyboard interrupt_
↪(shortcut)');
});
});
```

For an example of how to pass parameters to the client-side javascript from casper test suite, see the `casper.wait_for_output` implementation in `IPython/html/tests/casperjs/util.js`

Testing system design notes

This section is a set of notes on the key points of the IPython testing needs, that were used when writing the system and should be kept for reference as it evolves.

Testing IPython in full requires modifications to the default behavior of nose and doctest, because the IPython prompt is not recognized to determine Python input, and because IPython admits user input that is not valid Python (things like `%magics` and `!system` commands).

We basically need to be able to test the following types of code:

- (1) Pure Python files containing normal tests. These are not a problem, since Nose will pick them up as long as they conform to the (flexible) conventions used by nose to recognize tests.
- (2) Python files containing doctests. Here, we have two possibilities:

- The prompts are the usual `>>>` and the input is pure Python.
- The prompts are of the form `In [1]:` and the input can contain extended IPython expressions.

In the first case, Nose will recognize the doctests as long as it is called with the `--with-doctest` flag. But the second case will likely require modifications or the writing of a new doctest plugin for Nose that is IPython-aware.

- (3) ReStructuredText files that contain code blocks. For this type of file, we have three distinct possibilities for the code blocks:
 - They use `>>>` prompts.
 - They use `In [1]:` prompts.
 - They are standalone blocks of pure Python code without any prompts.

The first two cases are similar to the situation #2 above, except that in this case the doctests must be extracted from input code blocks using docutils instead of from the Python docstrings.

In the third case, we must have a convention for distinguishing code blocks that are meant for execution from others that may be snippets of shell code or other examples not meant to be run. One possibility is to assume that all indented code blocks are meant for execution, but to have a special docutils directive for input that should not be executed.

For those code blocks that we will execute, the convention used will simply be that they get called and are considered successful if they run to completion without raising errors. This is similar to what Nose does for standalone test functions, and by putting asserts or other forms of exception-raising statements it becomes possible to have literate examples that double as lightweight tests.

- (4) Extension modules with doctests in function and method docstrings. Currently Nose simply can't find these docstrings correctly, because the underlying doctest DocTestFinder object fails there. Similarly to #2 above, the docstrings could have either pure python or IPython prompts.

Of these, only 3-c (reST with standalone code blocks) is not implemented at this point.

How to Compile .less Files

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

For testing your development work in CSS, you'll need to compile the .less files to CSS. Make sure you have dependencies that LESS requires, including fabric, node, and lessc. Follow the below steps to compile the .less files:

```
python setup.py css
```

Alternatively, you can:

```
$ cd ipython/IPython/html
$ fab css
[localhost] local: components/less.js/bin/lessc -x style/style.less style/style.min.css
[localhost] local: components/less.js/bin/lessc -x style/ipython.less style/ipython.min.
↪CSS
Done
```

Steps for Releasing IPython

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

This document contains notes about the process that is used to release IPython. Our release process is currently not very formal and could be improved.

Most of the release process is automated by the `release` script in the `tools` directory of our main repository. This document is just a handy reminder for the release manager.

0. Environment variables

You can set some env variables to note previous release tag and current release milestone, version, and git tag:

```
PREV_RELEASE=rel-1.0.0
MILESTONE=1.1
VERSION=1.1.0
TAG="rel-$VERSION"
BRANCH=master
```

These will be used later if you want to copy/paste, or you can just type the appropriate command when the time comes. These variables are not used by scripts (hence no `export`).

1. Finish release notes

- If a major release:
- merge any pull request notes into what's new:

```
python tools/update_whatsnew.py
```

- update `docs/source/whatsnew/development.rst`, to ensure it covers the major points.
- move the contents of `development.rst` to `versionX.rst`
- generate summary of GitHub contributions, which can be done with:

```
python tools/github_stats.py --milestone $MILESTONE > stats.rst
```

which may need some manual cleanup. Add the cleaned up result and add it to `docs/source/whatsnew/github-stats-X.rst` (make a new file, or add it to the top, depending on whether it is a major release). You can use:

```
git log --format="%aN <%aE>" $PREV_RELEASE... | sort -u -f
```

to find duplicates and update `.mailmap`. Before generating the GitHub stats, verify that all closed issues and pull requests *have appropriate milestones*. This search should return no results.

2. Run the tools/build_release script

This does all the file checking and building that the real release script will do. This will let you do test installations, check that the build procedure runs OK, etc. You may want to also do a test build of the docs.

3. Create and push the new tag

Edit IPython/core/release.py to have the current version.

Commit the changes to release.py and jsversion:

```
git commit -am "release $VERSION"
git push origin $BRANCH
```

Create and push the tag:

```
git tag -am "release $VERSION" "$TAG"
git push origin --tags
```

Update release.py back to x.y-dev or x.y-maint, and push:

```
git commit -am "back to development"
git push origin $BRANCH
```

4. Get a fresh clone of the tag for building the release:

```
cd /tmp
git clone --depth 1 https://github.com/ipython/ipython.git -b "$TAG"
```

5. Run the release script

```
cd tools && ./release
```

This makes the tarballs, zipfiles, and wheels. It posts them to archive.ipython.org and registers the release with PyPI.

This will require that you have current wheel, Python 3.4 and Python 2.7.

7. Update the IPython website

- release announcement (news, announcements)
- update current version and download links
- (If major release) update links on the documentation page

8. Drafting a short release announcement

This should include i) highlights and ii) a link to the html version of the *What's new* section of the documentation. Post to mailing list, and link from Twitter.

9. Update milestones on GitHub

- close the milestone you just released
- open new milestone for (x, y+1), if it doesn't exist already

10. Celebrate!

IPython Sphinx Directive

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

The ipython directive is a stateful ipython shell for embedding in sphinx documents. It knows about standard ipython prompts, and extracts the input and output lines. These prompts will be renumbered starting at 1. The inputs will be fed to an embedded ipython interpreter and the outputs from that interpreter will be inserted as well. For example, code blocks like the following:

```
.. code:: python3

    In [136]: x = 2

    In [137]: x**3
    Out[137]: 8
```

will be rendered as

```
In [136]: x = 2

In [137]: x**3
Out[137]: 8
```

Note: This tutorial should be read side-by-side with the Sphinx source for this document because otherwise you will see only the rendered output and not the code that generated it. Excepting the example above, we will not in general be showing the literal ReST in this document that generates the rendered output.

The state from previous sessions is stored, and standard error is trapped. At doc build time, ipython's output and std err will be inserted, and prompts will be renumbered. So the prompt below should be renumbered in the rendered docs, and pick up where the block above left off.

```
In [138]: z = x*3   # x is recalled from previous block

In [139]: z
```

(continues on next page)

(continued from previous page)

```

Out[139]: 6

In [140]: print z
-----> print(z)
6

In [141]: q = z[]  # this is a syntax error -- we trap ipy exceptions
-----
File "<ipython console>", line 1
    q = z[]  # this is a syntax error -- we trap ipy exceptions
      ^
SyntaxError: invalid syntax

```

The embedded interpreter supports some limited markup. For example, you can put comments in your ipython sessions, which are reported verbatim. There are some handy “pseudo-decorators” that let you doctest the output. The inputs are fed to an embedded ipython session and the outputs from the ipython session are inserted into your doc. If the output in your doc and in the ipython session don’t match on a doctest assertion, an error will be

```

In [1]: x = 'hello world'

# this will raise an error if the ipython output is different
@doctest
In [2]: x.upper()
Out[2]: 'HELLO WORLD'

# some readline features cannot be supported, so we allow
# "verbatim" blocks, which are dumped in verbatim except prompts
# are continuously numbered
@verbatim
In [3]: x.st<TAB>
x.startswith x.strip

```

Multi-line input is supported.

```

In [130]: url = 'http://ichart.finance.yahoo.com/table.csv?s=CROX\
.....: &d=9&e=22&f=2009&g=d&a=1&br=8&c=2006&ignore=.csv'

In [131]: print url.split('&')
-----> print(url.split('&'))
['http://ichart.finance.yahoo.com/table.csv?s=CROX', 'd=9', 'e=22',

```

You can do doctesting on multi-line output as well. Just be careful when using non-deterministic inputs like random numbers in the ipython directive, because your inputs are ruin through a live interpreter, so if you are doctesting random output you will get an error. Here we “seed” the random number generator for deterministic output, and we suppress the seed line so it doesn’t show up in the rendered output

```

In [133]: import numpy.random

@suppress
In [134]: numpy.random.seed(2358)

@doctest
In [135]: numpy.random.rand(10,2)

```

(continues on next page)

(continued from previous page)

```
Out[135]:
array([[ 0.64524308,  0.59943846],
 [ 0.47102322,  0.8715456 ],
 [ 0.29370834,  0.74776844],
 [ 0.99539577,  0.1313423 ],
 [ 0.16250302,  0.21103583],
 [ 0.81626524,  0.1312433 ],
 [ 0.67338089,  0.72302393],
 [ 0.7566368 ,  0.07033696],
 [ 0.22591016,  0.77731835],
 [ 0.0072729 ,  0.34273127]])
```

Another demonstration of multi-line input and output

```
In [106]: print x
-----> print(x)
jdh

In [109]: for i in range(10):
.....:     print i
.....:
.....:
0
1
2
3
4
5
6
7
8
9
```

Most of the “pseudo-decorators” can be used as options to ipython mode. For example, to setup matplotlib pylab but suppress the output, you can do. When using the matplotlib use directive, it should occur before any import of pylab. This will not show up in the rendered docs, but the commands will be executed in the embedded interpreter and subsequent line numbers will be incremented to reflect the inputs:

```
.. code:: python3

In [144]: from pylab import *

In [145]: ion()
```

```
In [144]: from pylab import *

In [145]: ion()
```

Likewise, you can set `:doctest:` or `:verbatim:` to apply these settings to the entire block. For example,

```
In [9]: cd mpl/examples/
/home/jdhunter/mpl/examples
```

(continues on next page)

(continued from previous page)

```

In [10]: pwd
Out[10]: '/home/jdhunter/mpl/examples'

In [14]: cd mpl/examples/<TAB>
mpl/examples/animation/      mpl/examples/misc/
mpl/examples/api/           mpl/examples/mplot3d/
mpl/examples/axes_grid/     mpl/examples/pylab_examples/
mpl/examples/event_handling/ mpl/examples/widgets

In [14]: cd mpl/examples/widgets/
/home/msierig/mpl/examples/widgets

In [15]: !wc *
  2   12   77 README.txt
 40   97  884 buttons.py
 26   90  712 check_buttons.py
 19   52  416 cursor.py
180  404 4882 menu.py
 16   45  337 multicursor.py
 36  106  916 radio_buttons.py
 48  226 2082 rectangle_selector.py
 43  118 1063 slider_demo.py
 40  124 1088 span_selector.py
450 1274 12457 total

```

You can create one or more pyplot plots and insert them with the `@savefig` decorator.

```

@savefig plot_simple.png width=4in
In [151]: plot([1,2,3]);

# use a semicolon to suppress the output
@savefig hist_simple.png width=4in
In [151]: hist(np.random.randn(10000), 100);

```

In a subsequent session, we can update the current figure with some text, and then resave

```

In [151]: ylabel('number')

In [152]: title('normal distribution')

@savefig hist_with_text.png width=4in
In [153]: grid(True)

```

You can also have function definitions included in the source.

```

In [3]: def square(x):
...:     """
...:     An overcomplicated square function as an example.
...:     """
...:     if x < 0:
...:         x = abs(x)

```

(continues on next page)

(continued from previous page)

```
...:     y = x * x
...:     return y
...:
```

Then call it from a subsequent section.

```
In [4]: square(3)
Out [4]: 9

In [5]: square(-2)
Out [5]: 4
```

Writing Pure Python Code

Pure python code is supported by the optional argument *python*. In this pure python syntax you do not include the output from the python interpreter. The following markup:

```
.. code:: python

    foo = 'bar'
    print foo
    foo = 2
    foo**2
```

Renders as

```
foo = 'bar'
print foo
foo = 2
foo**2
```

We can even plot from python, using the `savefig` decorator, as well as, suppress output with a semicolon

```
@savefig plot_simple_python.png width=4in
plot([1,2,3]);
```

Similarly, `std err` is inserted

```
foo = 'bar'
foo[]
```

Comments are handled and state is preserved

```
# comments are handled
print foo
```

If you don't see the next code block then the options work.

```
ioff()
ion()
```

Multi-line input is handled.

```
line = 'Multi\
      line &\
      support &\
      works'
print line.split('&')
```

Functions definitions are correctly parsed

```
def square(x):
    """
    An overcomplicated square function as an example.
    """
    if x < 0:
        x = abs(x)
    y = x * x
    return y
```

And persist across sessions

```
print square(3)
print square(-2)
```

Pretty much anything you can do with the ipython code, you can do with a simple python script. Obviously, though it doesn't make sense to use the doctest option.

Pseudo-Decorators

Here are the supported decorators, and any optional arguments they take. Some of the decorators can be used as options to the entire block (eg `verbatim` and `suppress`), and some only apply to the line just below them (eg `savefig`).

`@suppress`

execute the ipython input block, but suppress the input and output block from the rendered output. Also, can be applied to the entire `..ipython` block as a directive option with `:suppress:`.

`@verbatim`

insert the input and output block in verbatim, but auto-increment the line numbers. Internally, the interpreter will be fed an empty string, so it is a no-op that keeps line numbering consistent. Also, can be applied to the entire `..ipython` block as a directive option with `:verbatim:`.

`@savefig` OUTFILE [IMAGE_OPTIONS]

save the figure to the static directory and insert it into the document, possibly binding it into a minipage and/or putting code/figure label/references to associate the code and the figure. Takes args to pass to the image directive (*scale*, *width*, etc can be kwargs); see [image options](#) for details.

`@doctest`

Compare the pasted in output in the ipython block with the output generated at doc build time, and raise errors if they don't match. Also, can be applied to the entire `..ipython` block as a directive option with `:doctest:`.

Configuration Options

`ipython_savefig_dir`

The directory in which to save the figures. This is relative to the Sphinx source directory. The default is `html_static_path`.

`ipython_rgxin`

The compiled regular expression to denote the start of IPython input lines. The default is `re.compile('In [(d+)]:s?(.*)s*')`. You shouldn't need to change this.

`ipython_rgxout`

The compiled regular expression to denote the start of IPython output lines. The default is `re.compile('Out[(d+)]:s?(.*)s*')`. You shouldn't need to change this.

`ipython_promptin`

The string to represent the IPython input prompt in the generated ReST. The default is `'In [%d]:'`. This expects that the line numbers are used in the prompt.

`ipython_promptout`

The string to represent the IPython prompt in the generated ReST. The default is `'Out [%d]:'`. This expects that the line numbers are used in the prompt.

Python 3 Compatibility Module

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

The `IPython.utils.py3compat` module provides a number of functions to make it easier to write code for Python 2 and 3. We also use `2to3` in the setup process to change syntax, and the `io.open()` function, which is essentially the built in `open` function from Python 3.

The names provided are:

- **PY3:** True in Python 3, False in Python 2.

Unicode related

- **decode, encode:** Shortcuts to decode or encode strings, using `sys.stdin.encoding` by default, and using replacement characters on errors.
- **str_to_unicode, unicode_to_str, str_to_bytes, bytes_to_str:** Convert to/from the platform's standard `str` type (bytes in Python 2, unicode in Python 3). Each function is a no-op on one of the two platforms.
- **cast_unicode, cast_bytes:** Accept unknown unicode or byte strings, and convert them accordingly.
- **cast_bytes_py2:** Casts unicode to byte strings on Python 2, but doesn't do anything on Python 3.

Miscellaneous

- **input**: Refers to `raw_input` on Python 2, `input` on Python 3 (needed because 2to3 only converts calls to `raw_input`, not assignments to other names).
- **builtin_mod_name**: The string name you import to get the builtins (`__builtin__` → `builtins`).
- **isidentifier**: Checks if a string is a valid Python identifier.
- **open**: Simple wrapper for Python 3 unicode-enabled `open`. Similar to `codecs.open`, but allows universal newlines. The current implementation only supports the very simplest use.
- **MethodType**: `types.MethodType` from Python 3. Takes only two arguments: function, instance. The class argument for Python 2 is filled automatically.
- **doctest_refactor_print**: Can be called on a string or a function (or used as a decorator). In Python 3, it converts print statements in doctests to `print()` calls. 2to3 does this for real doctests, but we need it in several other places. It simply uses a regex, which is good enough for the current cases.
- **u_format**: Where tests use the `repr()` of a unicode string, it should be written `'{u}"thestring"'`, and fed to this function, which will produce `'u"thestring"'` for Python 2, and `'"thestring"'` for Python 3. Can also be used as a decorator, to work on a docstring.
- **execfile**: Makes a return on Python 3 (where it's no longer a builtin), and upgraded to handle Unicode filenames on Python 2.

Architecture of IPython notebook's Dashboard

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

The tables below show the current RESTful web service architecture implemented in IPython notebook. The listed URL's use the HTTP verbs to return representations of the desired resource.

We are in the process of creating a new dashboard architecture for the IPython notebook, which will allow the user to navigate through multiple directory files to find desired notebooks.

Current Architecture

Miscellaneous

HTTP verb	URL	Action
GET	<code>./.*</code>	Strips trailing slashes.
GET	<code>/api</code>	Returns api version information.
*	<code>/api/notebooks</code>	Deprecated: redirect to <code>/api/contents</code>
GET	<code>/api/nbconvert</code>	

Notebook contents API.

HTTP verb	URL	Action
GET	/api/contents	Return a model for the base directory. See /api/contents/<path>/<file>.
GET	/api/contents/<file>	Return a model for the given file in the base directory. See /api/contents/<path>/<file>.
GET	/api/contents/<path>/<file>	Return a model for a file or directory. A directory model contains a list of models (without content) of the files and directories it contains.
PUT	/api/contents/<path>/<file>	Saves the file in the location specified by name and path. PUT is very similar to POST, but the requester specifies the name, where as with POST, the server picks the name. PUT /api/contents/path/Name.ipynb Save notebook at path/Name.ipynb. Notebook structure is specified in content key of JSON request body. If content is not specified, create a new empty notebook. PUT /api/contents/path/Name.ipynb with JSON body {"copy_from": "[path/to/OtherNotebook.ipynb"]} Copy OtherNotebook to Name
PATCH	/api/contents/<path>/<file>	Renames a notebook without re-uploading content.
POST	/api/contents/<path>/<file>	Creates a new file or directory in the specified path. POST creates new files or directories. The server always decides on the name. POST /api/contents/path New untitled notebook in path. If content specified, upload a notebook, otherwise start empty. POST /api/contents/path with body {"copy_from": "OtherNotebook.ipynb"} New copy of OtherNotebook in path
DELETE	/api/contents/<path>/<file>	delete a file in the given path.
GET	/api/contents/<path>/<file>/check-points	get lists checkpoint for a file.
POST	/api/contents/<path>/<file>/check-points	post creates a new checkpoint.
POST	/api/contents/<path>/<file>/check-points/<checkpoint_id>	post restores a file from a checkpoint.
DELETE	/api/contents/<path>/<file>/check-points/<checkpoint_id>	delete clears a checkpoint for a given file.

Kernel API

HTTP verb	URI	Action
GET	/api/kernels	Return a model of all kernels.
GET	/api/kernels /<kernel_id>	Return a model of kernel with given kernel id.
POST	/api/kernels	Start a new kernel with default or given name.
DELETE	/api/kernels /<kernel_id>	Shutdown the given kernel.
POST	/api/kernels /<kernel_id> /<action>	Perform action on kernel with given kernel id. Actions can be “interrupt” or “restart”.
WS	/api/kernels /<kernel_id> /channels	Websocket stream
GET	/api/kernel specs	Return a spec model of all available kernels.
GET	/api/kernel specs/ <kernel_name>	Return a spec model of all available kernels with a given kernel name.

Sessions API

HTTP verb	URL	Action
GET	/api/sessions	Return model of active sessions.
POST	/api/sessions	If session does not already exist, create a new session with given notebook name and path and given kernel name. Return active session.
GET	/api/sessions /<session_id>	Return model of active session with given session id.
PATCH	/api/sessions /<session_id>	Return model of active session with notebook name or path of session with given session id.
DELETE	/api/sessions /<session_id>	Delete model of active session with given session id.

Clusters API

HTTP verb	URL	Action
GET	/api/clusters	Return model of clusters.
GET	/api/clusters <cluster_id>	Return model of given cluster.
POST	/api/clusters <cluster_id> <action>	Perform action with given clusters. Valid actions are “start” and “stop”

Old Architecture

This chart shows the web-services in the single directory IPython notebook.

HTTP verb	URL	Action
GET	/notebooks	return list of dicts with each notebook's info
POST	/notebooks	if sending a body, saving that body as a new notebook; if no body, create a new notebook.
GET	/notebooks /<notebook_id>	get JSON data for notebook
PUT	/notebooks /<notebook_id>	saves an existing notebook with body data
DELETE	/notebooks /<notebook_id>	deletes the notebook with the given ID

This chart shows the architecture for the IPython notebook website.

HTTP verb	URL	Action
GET	/	navigates user to dashboard of notebooks and clusters.
GET	/<notebook_id>	go to webpage for that notebook
GET	/new	creates a new notebook with profile (or default, if no profile exists) settings
GET	/<notebook_id> /copy	opens a duplicate copy of the notebook with the given ID in a new tab
GET	/<notebook_id> /print	prints the notebook with the given ID; if notebook doesn't exist, displays error message
GET	/login	navigates to login page; if no user profile is defined, it navigates user to dashboard
GET	/logout	logs out of current profile, and navigates user to login page

This chart shows the Web services that act on the kernels and clusters.

HTTP verb	URL	Action
GET	/kernels	return the list of kernel IDs currently running
GET	/kernels /<kernel_id>	—
GET	/kernels /<kernel_id> <action>	performs action (restart/kill) kernel with given ID
GET	/kernels /<kernel_id> /iopub	—
GET	/kernels /<kernel_id> /shell	—
GET	/rstservice/ render	—
GET	/files/(.*)	—
GET	/clusters	returns a list of dicts with each cluster's information
POST	/clusters /<profile_id> /<cluster_action>	performs action (start/stop) on cluster with given profile ID
GET	/clusters /<profile_id>	returns the JSON data for cluster with given profile ID

JavaScript Events

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

(Note: this page is not currently consistent with IPython/Jupyter master)

Javascript events are used to notify unrelated parts of the notebook interface when something happens. For example, if the kernel is busy executing code, it may send an event announcing as such, which can then be picked up by other services, like the notification area. For details on how the events themselves work, see the [JQuery documentation](#).

This page documents the core set of events, and explains when and why they are triggered.

Cell-related events

- *command_mode.Cell*
- *create.Cell*
- *delete.Cell*
- *edit_mode.Cell*
- *select.Cell*
- *output_appended.OutputArea*

CellToolbar-related events

- *preset_activated.CellToolbar*
- *preset_added.CellToolbar*

Dashboard-related events

- *app_initialized.DashboardApp*
- *sessions_loaded.Dashboard*

app_initialized.DashboardApp

When the Jupyter Notebook browser window opens for the first time and initializes the Dashboard App. The Dashboard App lists the files and notebooks in the current directory. Additionally, it lets you create and open new Jupyter Notebooks.

Kernel-related events

- *execution_request.Kernel*
- *input_reply.Kernel*
- *kernel_autorestarting.Kernel*
- *kernel_busy.Kernel*
- *kernel_connected.Kernel*
- *kernel_connection_failed.Kernel*
- *kernel_created.Kernel*
- *kernel_created.Session*
- *kernel_dead.Kernel*
- *kernel_dead.Session*
- *kernel_disconnected.Kernel*
- *kernel_idle.Kernel*
- *kernel_interrupting.Kernel*
- *kernel_killed.Kernel*
- *kernel_killed.Session*
- *kernel_ready.Kernel*
- *kernel_reconnecting.Kernel*
- *kernel_restarting.Kernel*
- *kernel_starting.Kernel*
- *send_input_reply.Kernel*
- *shell_reply.Kernel*
- *spec_changed.Kernel*

kernel_created.Kernel

The kernel has been successfully created or re-created through `/api/kernels`, but a connection to it has not necessarily been established yet.

kernel_created.Session

The kernel has been successfully created or re-created through `/api/sessions`, but a connection to it has not necessarily been established yet.

kernel_reconnecting.Kernel

An attempt is being made to reconnect (via websockets) to the kernel after having been disconnected.

kernel_connected.Kernel

A connection has been established to the kernel. This is triggered as soon as all websockets (e.g. to the shell, iopub, and stdin channels) have been opened. This does not necessarily mean that the kernel is ready to do anything yet, though.

kernel_starting.Kernel

The kernel is starting. This is triggered once when the kernel process is starting up, and can be sent as a message by the kernel, or may be triggered by the frontend if it knows the kernel is starting (e.g., it created the kernel and is connected to it, but hasn't been able to communicate with it yet).

kernel_ready.Kernel

Like `kernel_idle.Kernel`, but triggered after the kernel has fully started up.

kernel_restarting.Kernel

The kernel is restarting. This is triggered at the beginning of an restart call to `/api/kernels`.

kernel_autorestarting.Kernel

The kernel is restarting on its own, which probably also means that something happened to cause the kernel to die. For example, running the following code in the notebook would cause the kernel to autorestart:

```
import os
os._exit(1)
```

kernel_interrupting.Kernel

The kernel is being interrupted. This is triggered at the beginning of an interrupt call to `/api/kernels`.

kernel_disconnected.Kernel

The connection to the kernel has been lost.

kernel_connection_failed.Kernel

Not only was the connection lost, but it was lost due to an error (i.e., we did not tell the websockets to close).

kernel_idle.Kernel

The kernel's execution state is 'idle'.

kernel_busy.Kernel

The kernel's execution state is 'busy'.

kernel_killed.Kernel

The kernel has been manually killed through `/api/kernels`.

kernel_killed.Session

The kernel has been manually killed through `/api/sessions`.

kernel_dead.Kernel

This is triggered if the kernel dies, and the kernel manager attempts to restart it, but is unable to. For example, the following code run in the notebook will cause the kernel to die and for the kernel manager to be unable to restart it:

```
import os
from IPython.kernel.connect import get_connection_file
with open(get_connection_file(), 'w') as f:
    f.write("garbage")
os._exit(1)
```

kernel_dead.Session

The kernel could not be started through `/api/sessions`. This might be because the requested kernel type isn't installed. Another reason for this message is that the kernel died or was killed, but the session wasn't.

Notebook-related events

- *app_initialized.NotebookApp*
- *autosave_disabled.Notebook*
- *autosave_enabled.Notebook*
- *checkpoint_created.Notebook*
- *checkpoint_delete_failed.Notebook*
- *checkpoint_deleted.Notebook*

- *checkpoint_failed.Notebook*
- *checkpoint_restore_failed.Notebook*
- *checkpoint_restored.Notebook*
- *checkpoints_listed.Notebook*
- *command_mode.Notebook*
- *edit_mode.Notebook*
- *list_checkpoints_failed.Notebook*
- *notebook_load_failed.Notebook*
- *notebook_loaded.Notebook*
- *notebook_loading.Notebook*
- *notebook_rename_failed.Notebook*
- *notebook_renamed.Notebook*
- *notebook_restoring.Notebook*
- *notebook_save_failed.Notebook*
- *notebook_saved.Notebook*
- *notebook_saving.Notebook*
- *rename_notebook.Notebook*
- *selected_cell_type_changed.Notebook*
- *set_dirty.Notebook*
- *set_next_input.Notebook*
- *trust_changed.Notebook*

Other

- *open_with_text.Pager*
- *rebuild.QuickHelp*

Setup IPython development environment using boot2docker

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

The following are instructions on how to get an IPython development environment up and running without having to install anything on your host machine, other than `boot2docker` <<https://github.com/boot2docker/boot2docker>> `__` and `docker` <<https://www.docker.com/>> `__`.

Install boot2docker

Install `boot2docker`. There are multiple ways to install, depending on your environment. See the [boot2docker docs](#).

Mac OS X

On a Mac OS X host with `Homebrew` installed:

```
$ brew install boot2docker docker
```

Initialize boot2docker VM

```
$ boot2docker init
```

Start VM

```
$ boot2docker up
```

The `boot2docker` CLI communicates with the `docker` daemon on the `boot2docker` VM. To do this, we must set some environment variables, e.g. `DOCKER_HOST`,

```
$ $(boot2docker shellinit)
```

To view the IP address of the VM:

```
$ boot2docker ip
192.168.59.103
```

Install ipython from Development Branch

```
$ git clone --recursive https://github.com/ipython/ipython.git
```

Build Docker Image

Use the `Dockerfile` in the cloned `ipython` directory to build a Docker image.

```
$ cd ipython
$ docker build --rm -t ipython .
```

Run Docker Container

Run a container using the new image. We mount the entire `ipython` source tree on the host into the container at `/srv/ipython` to enable changes we make to the source on the host immediately reflected in the container.

```
# change to the root of the git clone
$ cd ipython
$ docker run -it --rm -p 8888:8888 --workdir /srv/ipython --name ipython-dev -v `pwd`:/
↪srv/ipython ipython /bin/bash
```

To list the running container from another shell on the host:

```
$ $(boot2docker shellinit)
$ docker ps
CONTAINER ID        IMAGE               COMMAND             CREATED             STATUS              PORTS
↪                NAMES
f6065f206519      ipython            "/bin/bash"        1 minutes ago      Up 1↪
↪minutes          0.0.0.0:8888->8888/tcp  ipython-dev
```

Install IPython in Editable Mode

Once in the container, you'll need to uninstall the `ipython` package and re-install in editable mode to enable your dev changes to be reflected in your environment.

```
container $ pip uninstall ipython

# pip install ipython in editable mode
container $ cd /srv
container $ ls
ipython
container $ pip install -e ipython
```

Run Notebook Server

```
container $ ipython notebook --no-browser --ip=*
```

Visit Notebook Server

On your host, run the following command to get the IP of the boot2docker VM if you forgot:

```
# on host
$ boot2docker ip
192.168.59.103
```

Then visit it in your browser:

```
# browser
http://192.168.59.103:8888
```

As a shortcut on a Mac, you can run the following in a terminal window (or make it a bash alias):

```
$ open http://$(boot2docker ip 2>/dev/null):8888
```

Testing Kernels

Attention: This is copied verbatim from the old IPython wiki and is currently under development. Much of the information in this part of the development guide is out of date.

IPython makes it very easy to create wrapper kernels using its kernel framework. It requires extending the Kernel class and implementing a set of methods for the core functions like execute, history etc. Its also possible to write a full blown kernel in a language of your choice implementing listeners for all the zmq ports.

The key problem for any kernel implemented by these methods is to ensure that it meets the message specification. The kerneltest command is a means to test the installed kernel against the message spec and validate the results.

The kerneltest tool

The kerneltest tool is part of IPython.testing and is also included in the scripts similar to iptest. This takes 2 parameters - the name of the kernel to test and the test script file. The test script file should be in json format as described in the next section.

```
kerneltest python test_script.json
```

You can also pass in an optional message spec version to the command. At the moment only the version 5 is supported, but as newer versions are released this can be used to test the kernel against a specific version of the kernel.

```
kerneltest python test_script.json 5
```

The kernel to be tested needs to be installed and the kernelspec available in the user IPython directory. The tool will instantiate the kernel and send the commands over ZMQ. For each command executed on the kernel, the tool will validate the reply to ensure that it matches the message specification. In some cases the output is also checked, but the reply is always returned and printed out on the console. This can be used to validate that apart from meeting the message spec the kernel also produced the correct output.

The test script file

The test script file is a simple json file that specifies the command to execute and the test code to execute for the command.

```
{
  "command": {
    "test_code": <code>
  }
}
```

For some commands in the message specification like kernel_info there is no need to specify the test_code parameter. The tool validates if it has all the inputs needed to execute the command and will print out an error to the console if it finds a missing parameter. Since the validation is built in, and only required parameters are passed, it is possible to add additional fields in the json file for test documentation.

```
{
  "command":{
    "test_name":"sample test",
    "test_description":"sample test to show how the test script file is created",
    "test_code":<code>
  }
}
```

A sample test script for the redis kernel will look like this

```
{
  "execute":{
    "test_code":"get a",
    "comments":"test basic code execution"
  },
  "complete":{
    "test_code":"get",
    "comments":"test getting command auto complete"
  },
  "kernel_info":{
    "comments":"simple kernel info check"
  },
  "single_payload":{
    "test_code":"get a",
    "comments":"test one payload"
  },
  "history_tail":{
    "test_code":"get a",
    "comments":"test tail history"
  },
  "history_range":{
    "test_code":"get a",
    "comments":"test range history"
  },
  "history_search":{
    "test_code":"get a",
    "comments":"test search history"
  }
}
```

A template for new Python files in IPython: [template.py](#)

Whether you are a new, returning, or current contributor to Project Jupyter's subprojects or IPython, **we welcome you**.

Project Jupyter has seen steady growth over the past several years, and it is wonderful to see the many ways people are using these projects. As a result of this rapid expansion, our project maintainers are balancing many requirements, needs, and resources. We ask contributors to take some time to become familiar with our contribution guides and spend some time learning about our project communication and workflow.

The Contributor Guides and individual project documentation offer guidance. If you have a question, please ask us. [Community Resources](#) provides information on our commonly used communication methods.

We are very pleased to have you as a contributor, and we hope you will find valuable your impact on the projects. **Thank you** for sharing your interests, ideas, and skills with us.

3.5.6 Do I really have something to contribute to Jupyter?

Absolutely . There are always ways to contribute to this community! Whether it is contributing code, improving documentation and communications, teaching others, or participating in conversations in the community, we welcome and value your contribution!

3.5.7 What kinds of contributions can I make?

The following sections try to provide inspirations for different ways that you can contribute to the Jupyter ecosystem. They're non-complete - if you can think up any way to make an improvement, we appreciate it!

Improving documentation

One of the most important parts of the Jupyter ecosystem is its documentation. Good documentation makes it easier for users to learn how to use the tools. It also makes it easier to teach others, and to maintain and improve the code itself. There are many ways to improve documentation, such as **reading tutorials and reporting confusing parts, finding type-os and minor errors in docs, writing your own guides and tutorials, improving docstrings within the code, and improving documentation style and design.**

If you'd like to improve documentation in the Jupyter community, check out the *Documentation Guide*.

Improving code

There are many different codebases that make up the tools in the Jupyter ecosystem. These are split across many repositories in several GitHub organizations. They cover many different parts of interactive computing, such as **user interfaces, kernels, shared infrastructure, interactive widgets, or structured documents.**

We recommend checking out the *Developer Guide* for more information about how you can find the right project to contribute to, and where to go next.

Participating in the community

The most important part of Jupyter is its community - this is a large and diverse group of people spread across the globe. One of the best ways to contribute to Jupyter is to simply be a positive and helpful member of this community. Whether it **participating in online conversations, offering to help others, coming to community meetings, or teaching others about Jupyter,** there are many ways to improve the Jupyter community. For more information about this, we recommend starting with the *Community*.

3.6 Reference

3.6.1 Custom mimetypes (MIME types)

What's a mimetype?

When an internet request and response occurs, a Content-Type header is passed. A mimetype, also referred to as MIME type, identifies how the content that is being returned should be handled or used, based on type, by the application and browser. A MIME type is made up of a MIME *group* (i.e. application, image, audio, etc.) and a MIME *subtype*. For example, a MIME type is image/png where MIME *group* is image and *subtype* is png.

As types may contain vendor specific items, a **custom vendor specific MIME type**, vnd, can be used. A vendor specific MIME type will contain vnd such as application/vnd.jupyter.cells.

Custom mimetypes used in Jupyter and IPython projects

- `application/vnd.jupyter`
- `application/vnd.jupyter.cells`
- `application/vnd.jupyter.dragindex` used by `nbdime`
- `application/x-ipynb+json` for notebooks
- `text/html`
 - metadata:
 - * `isolated`: `boolean` – HTML should be rendered inside an `<iframe>`.

Listing of custom mimetypes used for display

- `application/vnd.geo+json` - [GeoJSON spec](#) `application/vnd.geo+json` is now deprecated and replaced by `application/geo+json`
- `application/geo+json` - preferred [GeoJSON spec](#)
- `application/vnd.plotly.v1+json` - [Plotly JSON Schema](#)
- `application/vdom.v1+json` - [Virtual DOM spec](#)

3.6.2 IPython

IP[y]: IPython

Interactive Computing

Description

IPython provides a rich architecture for interactive computing with:

- A powerful interactive shell.
- A kernel for Jupyter.
- Support for interactive data visualization and use of GUI toolkits.
- Flexible, embeddable interpreters to load into your own projects.
- Easy to use, high performance tools for parallel computing.

Background

IPython is a growing project, with increasingly language-agnostic components. IPython 3.x was the last monolithic release of IPython, containing the notebook server, `qtconsole`, etc. As of IPython 4.0, the language-agnostic parts of the project: the notebook format, message protocol, `qtconsole`, notebook web application, etc. have moved to new projects under the name Jupyter. IPython itself is focused on interactive Python, part of which is providing a Python kernel for Jupyter.

Resources

3.6.3 Glossary

client-server-architecture

A [software design pattern](#) used by Jupyter applications like **JupyterLab**. With this pattern, a server program (running on a user's computer or on a server that can be accessed over a business or public network) provides access to stored information (in JupyterLab's case, documents in a folder such as notebooks and other data files), and a client program (the web application and editing interface for JupyterLab in this case) connects to the server program to view and interact with that data.

console

In modern times, a [console](#) refers to a simple text-based program where you type commands for your computer to run, also commonly called a [terminal](#).

command line

A simple text-based program where you type commands for your computer to run, also called a [terminal](#) or [console](#).

Command Prompt

On Windows, this is the application where commands are typed into a window for execution. Also see [console](#), [command line](#), or [terminal](#).

conda

The package management tool for Anaconda, which allows for easy installation of Python libraries and other tools into an [environment](#).

config

Refers to the configuration files, and related processes that affect how Jupyter behaves.

environment

The name for the installed software, configurations, tools, and [environment variables](#) that collectively define what capabilities a computer system has and how it behaves. Missing or incorrect software, configurations or environment variables can cause software to malfunction, or software development processes to fail. See [this link](#) for more information.

environment variable

See [this wiki link](#) for information.

ipynb

The file extension (.ipynb) for saved notebook files, commonly authored and edited with Jupyter web applications such as JupyterLab or Jupyter Notebook. It stands for "IPython Notebook".

IPython

The earliest ancestor of **Project Jupyter**. It began as an improved interactive Python **REPL**, then expanded to also contain a stored notebook document format (.ipynb) and related tools, a web based document authoring and editing tool (IPython Notebook), and more. After the project became large enough, IPython was split into many separate projects under the **Project Jupyter** umbrella through **The Big Split**.

IPython Notebook

An early ancestor of the Jupyter Notebook application, this was one of the first web-based applications for authoring and editing computational notebook documents.

ipywidgets

A [python package for Jupyter](#) that allows Notebook applications to create and embed interface components like sliders or buttons in their notebooks.

Jovyan

A term for fans of Jupyter and members of the Jupyter community. This term is [derived from](#) the astronomical

term “Jovian”, meaning “Like Jupiter”.

Jupyter

See **Project Jupyter**. Also occasionally used to refer to one of the Jupyter frontend notebook editing applications (**Jupyter Notebook** or **JupyterLab**) based on the context it’s used in (this ambiguous usage can lead to confusion, it’s better to use the actual name of the application).

Jupyter Notebook (Application)

A simplified web application for authoring and editing computational notebooks in the **.ipynb** format (a notebook file is also commonly referred to as a Jupyter Notebook).

Jupyter Notebook (File Format)

A common name for a saved **.ipynb** Notebook file. For instance, “I just made a Jupyter Notebook summarizing our lab results, I can send it to you later today.”

JupyterLab

A modern web application for authoring and editing interactive computational notebooks.

kernel

A kernel provides programming language support in Jupyter. **IPython** is the default kernel. Additional kernels include R, Julia, and many more.

Notebook

The generic name for a computational notebook document, such as a saved **.ipynb** file format created by JupyterLab. Also sometimes used as a shorthand to refer to Jupyter Notebook, the notebook editing application.

Notebook Dashboard

The notebook user interface in the **Jupyter Notebook Application** (see above) which shows a list of the notebooks, files, and subdirectories in the directory where the notebook server is started.

pip

Python package manager.

profiles

Not available in Jupyter. In IPython 3, profiles are collections of configuration and runtime files.

Project Jupyter

The umbrella project for many related tools for interactive computing with interactive notebooks

REPL

Stands for “read-eval-print-loop”. An **REPL** is a program that reads user commands and inputs, evaluates them, and prints results for the user to view. These steps run in a perpetual loop, allowing the user to prototype code, interact with data, and view results on-the-fly, since the data and code stay open in memory after evaluation while the REPL is running.

terminal

In modern times, a **terminal** refers to a simple text-based program where you type commands for your computer to run, also commonly called a **console**.

The Big Split

An event and effort undertaken around 2015 by **IPython** developers to split up the then-massive IPython project into a series of smaller, more focused sub-projects under the Project Jupyter umbrella.

widget

A user interface component from **ipywidgets**, similar to a plugin, that allows customized input, such as a slider.

3.6.4 Resources

- [genindex](#)
- [search](#)

RESOURCES

Site	Description
Jupyter website	Keep up to date on Jupyter
IPython website	Learn more about IPython
Jupyter Discourse forum	Start here for help and support questions
Jupyter Accessibility	Accessibility sub-project documentation
Jupyter mailing list	General discussion of Jupyter's use
Jupyter in Education group	Discussion of Jupyter's use in education
NumFocus	Promotes world-class, innovative, open source scientific software
Donate to Project Jupyter	Please contribute to open science collaboration and sustainability

INDICES AND TABLES

- genindex
- *Glossary*
- search

Symbols

--config-dir
 jupyter command line option, 17
 --data-dir
 jupyter command line option, 17
 --help
 jupyter command line option, 17
 --json
 jupyter command line option, 17
 --paths
 jupyter command line option, 17
 --runtime-dir
 jupyter command line option, 17
 -h
 jupyter command line option, 17

B

Binder, 31

C

client-server-architecture, 172
 command line, 172
 Command Prompt, 172
 conda, 172
 config, 172
 console, 172

D

docker-stacks, 31
 dockerspawner, 31

E

environment, 172
 environment variable, 172
 JUPYTER_CONFIG_DIR, 18, 19
 JUPYTER_CONFIG_PATH, 18, 19
 JUPYTER_DATA_DIR, 19
 JUPYTER_PATH, 18, 19
 JUPYTER_RUNTIME_DIR, 19
 PATH, 17

I

ipykernel, 30
 ipynb, 172
 IPython, 30, 172
 IPython Notebook, 172
 ipywidgets, 172

J

Jovyan, 172
 Jupyter, 173
 jupyter command line option
 --config-dir, 17
 --data-dir, 17
 --help, 17
 --json, 17
 --paths, 17
 --runtime-dir, 17
 -h, 17
 Jupyter Console, 30
 Jupyter Notebook, 30
 Jupyter Notebook (*Application*), 173
 Jupyter Notebook (*File Format*), 173
 Jupyter QtConsole, 30
 jupyter4edu, 31
 jupyter_client, 32
 JUPYTER_CONFIG_DIR, 18, 19
 JUPYTER_CONFIG_PATH, 18, 19
 jupyter_core, 32
 JUPYTER_DATA_DIR, 19
 JUPYTER_PATH, 18, 19
 JUPYTER_RUNTIME_DIR, 19
 jupyterhub, 31
 JupyterLab, 173

K

kernel, 173

N

nbclient, 31
 nbconvert, 31
 nbformat, 31
 nbgrader, 31

nbviewer, [31](#)
Notebook, [173](#)
Notebook Dashboard, [173](#)

P

PATH, [17](#)
pip, [173](#)
profiles, [173](#)
Project Jupyter, [173](#)

R

REPL, [173](#)

T

terminal, [173](#)
The Big Split, [173](#)

W

widget, [173](#)

X

Xeus, [30](#)